

A d d e n d u m



Iowa Department of Transportation
Office of Contracts

Date of Letting: December 15, 2015
Date of Addendum: December 9, 2015


| B.O. | Proposal ID | Proposal Work Type | County | Project Number | Addendum |
|-------------|--------------------|---------------------------|---------------|------------------------|-----------------|
| 303 | 63-0055-502 | Slope Protection | Marion | MB-005-5(502)62--77-63 | 15DEC303.A01 |

Make the following changes to the PROPOSAL PLAN ATTACHMENTS:

Replace Pages 4 of 6 thru 5 of 6 with the attached Pages 4 of 6 thru 5 of 6.

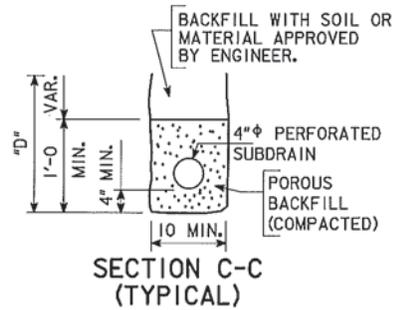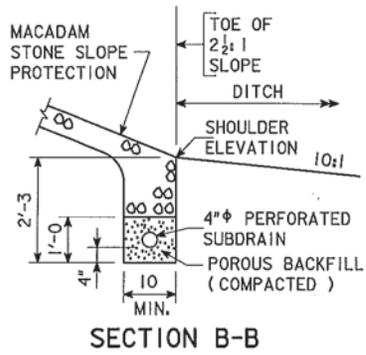

"D" = DEPTH REQUIRED TO PROVIDE PROPER FLOW LINE FOR SUBDRAIN.

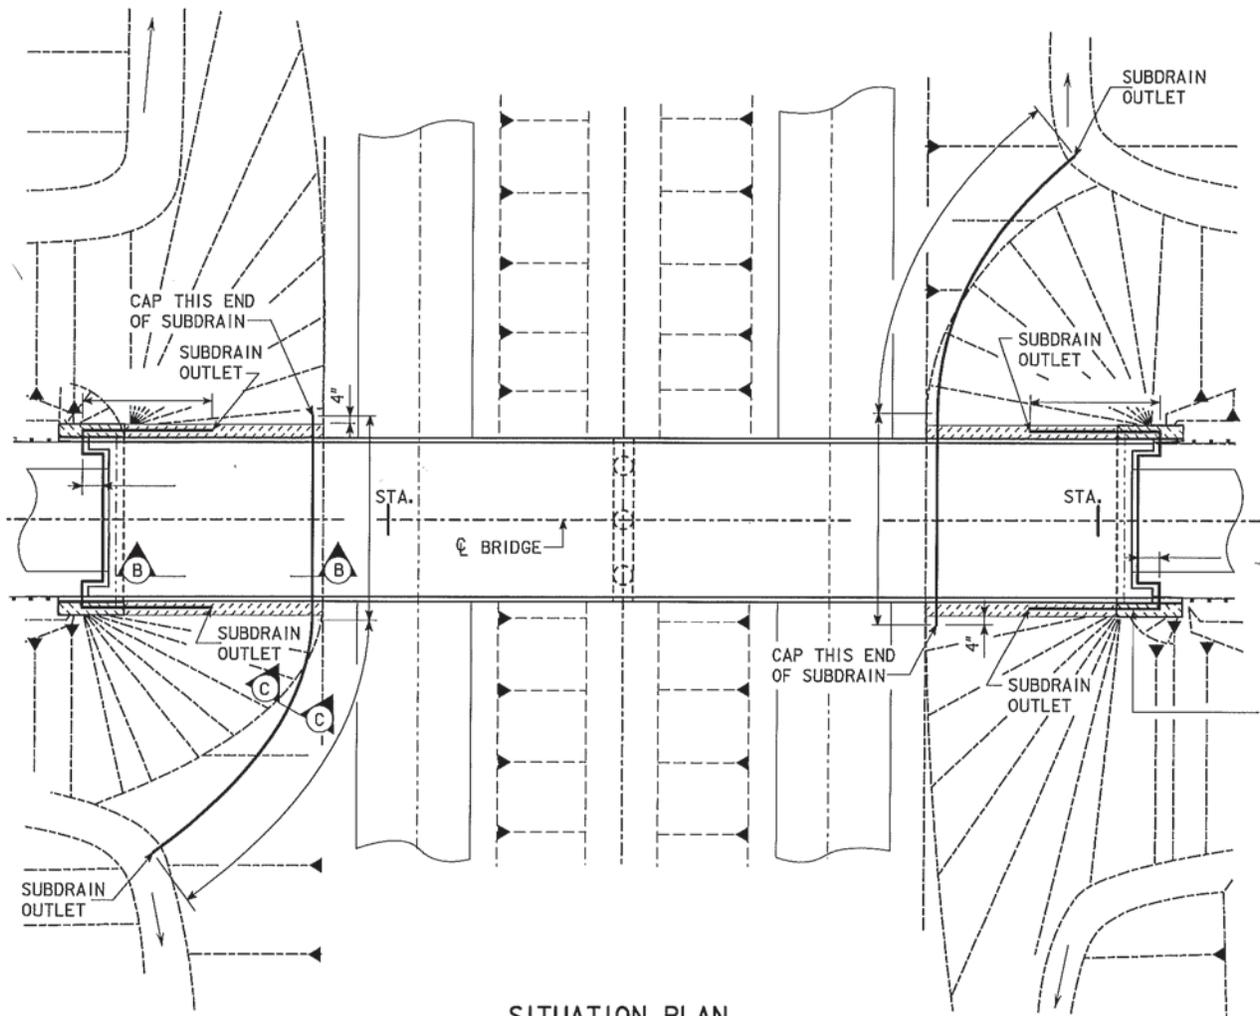

SUBDRAIN NOTES :

THIS PLAN SHEET SHOWS DETAILS FOR PLACING ALL SUBDRAINS AND SUBDRAIN OUTLETS REQUIRED FOR THIS STRUCTURE.

THE SUBDRAINS SHALL BE 4" IN DIAMETER AND SHALL BE IN ACCORDANCE WITH ARTICLE 4143.01, B, OF THE STANDARD SPECIFICATIONS. THE SUBDRAIN OUTLET SHALL CONSIST OF A 6'-0 LENGTH OF PIPE WITH A REMOVABLE RODENT GUARD AS DETAILED ON THIS SHEET.

THE COST OF FURNISHING AND PLACING SUBDRAIN(INCLUDING EXCAVATION), GRANULAR BACKFILL, POROUS BACKFILL, AND SUBDRAIN OUTLET IS TO BE INCLUDED IN THE PRICE BID "MACADAM STONE SLOPE PROTECTION". NO EXTRA PAYMENT WILL BE MADE.

DUE TO FIELD ADJUSTMENTS OF THE GRADING LAYOUT.

THE UPHILL END OF THE PERFORATED SUBDRAIN AT THE TOE OF SLOPE PROTECTION SHALL BE CAPPED AS APPROVED BY THE ENGINEER.

THE POROUS BACKFILL AND SUBDRAIN ARE TO BE CARRIED AROUND PIER COLUMNS IF THE COLUMN PLACEMENT INTERFERES WITH ALIGNMENT OF SUBDRAIN AS SHOWN ON THIS SHEET.

EROSION CONTROL :

FOLLOWING COMPLETION OF WORK ON THIS PROJECT; SEEDING, FERTILIZING AND MULCHING OF ALL DISTURBED AREAS SHALL BE DONE AS DIRECTED BY THE ENGINEER.

SEEDING:

3 LBS. OF FESQUE, KENTUCKY 31 OR FAWN PER 1000 SQ. FT.

FERTILIZER:

17 LBS. OF 13-13-13 (OR EQUIVALENT) COMMERCIAL FERTILIZER PER 1000 SQ. FT.

MULCH:

70 LBS. OF DRY CEREAL STRAW PER 1000 SQ. FT. ALL MULCH TO BE CONSOLIDATED INTO SOIL WITH THE MULCH STABILIZER.

THE PREPARATION OF THE SEEDBED, FURNISHED AND APPLICATION OF SEED, FERTILIZER AND MULCH TO ALL DISTURBED AREAS ON THIS PROJECT SHALL BE CONSIDERED INCIDENTAL TO WORK ON THIS PROJECT AND NO EXTRA COMPENSATION WILL BE ALLOWED.

