



CENTER FOR  
PORTLAND CEMENT CONCRETE  
PAVEMENT TECHNOLOGY

IOWA STATE UNIVERSITY

#### RESEARCH PROJECT TITLE

Stringless Portland Cement  
Concrete Paving (TR-490)

#### FINAL REPORT DATE

February 2004

#### SPONSORS

Iowa Highway Research Board  
Iowa Department of Transportation  
PCC Center, Iowa State University

#### PRINCIPAL INVESTIGATOR

Jim Cable  
Assoc. Prof., Civil, Construction &  
Environmental Engineering  
Iowa State University  
515-294-2862  
jkcable@iastate.edu

#### CO-PRINCIPAL INVESTIGATOR

Ed Jaselskis  
Assoc. Prof., Civil, Construction &  
Environmental Engineering  
Iowa State University  
515-294-0250  
ejaselsk@iastate.edu

#### KEY WORDS

global positioning systems  
pavement profile  
pavement smoothness  
pavement surface elevation  
stringless paving control

#### MORE INFORMATION

[http://www.pcccenter.iastate.edu/  
research/detail.cfm?projectID=585](http://www.pcccenter.iastate.edu/research/detail.cfm?projectID=585)

#### PCC CENTER IOWA STATE UNIVERSITY

2901 South Loop Drive, Suite 3100  
Ames, IA 50010-8634  
515-294-8103

The opinions, findings, and conclusions expressed in this publication are those of the authors and not necessarily those of the sponsors. The authors and sponsors do not endorse products or manufacturers.

# Stringless Paving

tech transfer summary


## Objective

Recent research evaluated the potential of new stringless paving control methods. Stringless paving control using a global positioning system (GPS) was compared with the conventional string-line method of paving control for the following characteristics:

- vertical and horizontal alignment
- concrete yield quantity
- pavement thickness/depth
- subgrade and pavement surface elevations
- pavement profile
- pavement smoothness

## Problem Statement

Conventional concrete pavement construction uses a string line on one or both sides of the paving train to ensure proper pavement thickness and alignment. This approach requires space on each side of the paving machine to set the string line. The placement and verification of the string line is time intensive and limits access to the area in front of the slip-form paver. Stringless control has the potential to provide the required guidance without the need for string lines.

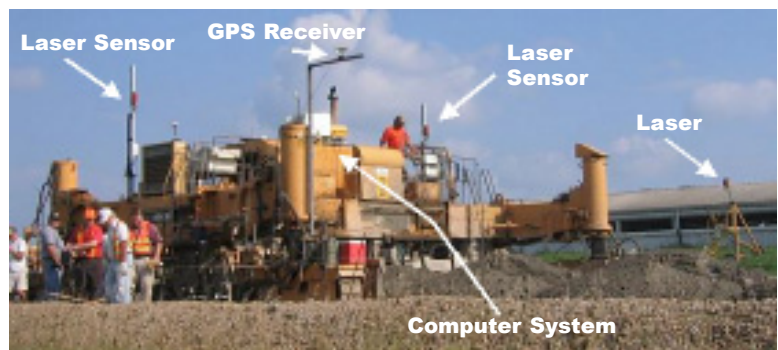

*Slip-form paver with GPS equipment attached*

## Technology Description

Several companies have developed stringless equipment control and guidance systems using technologies such as robotic total stations and GPS with laser positioning. These stringless technologies have been successfully implemented on construction earthmoving and grading projects. This research tested this technology in a new area—concrete paving.

## Technology Description (continued)

The research evaluated a GPS system developed by GeoLogic Computer Systems and installed on CMI Terex Corporation slip-form paving train equipment. The research findings should be applicable to similar equipment from other manufacturers, but other brands may require minor modifications such as the addition of proportional hydraulic control valves.

The system evaluated uses GPS accompanied by lasers to control and guide paving equipment such as trimmers, slip-form pavers, and texture/cure machines. A GPS receiver is mounted over the front right track of the slip-form paving machine and two laser sensors are mounted on separate laser masts located on opposite sides of the paver. The lasers improve the elevation accuracy of the GPS control but are not essential to the system.

A computer on the paver runs the system. The computer requires a three-dimensional (3D) digital design of the construction project. A land survey may be required to convert some data to 3D GPS coordinates.

## Key Findings

- Stringless GPS control can successfully guide the slip-form paver and adequately control the concrete yield quantity, pavement depth, and surface elevations.
- The GPS receiver location on the slip-form paver is critical to coordination with the 3D design program and proper machine control.
- Paving equipment hydraulic controls and computer software must be modified to allow for uniform changes in elevation as the equipment moves forward to meet profile specification requirements.
- GPS control can provide a reasonably smooth riding pavement surface. However, additional software development is required to uniformly produce surface profiles smooth enough to meet Iowa DOT specification requirements for incentive payments.

## Implementation Benefits

Stringless paving eliminates the need for string lines. This carries many advantages:

- Avoid project delays caused by time-intensive staking of string lines.
- Reduce contractors' move in and move out times.
- Have shorter construction periods that disrupt traffic.
- Reduce labor costs of placing and removing string lines.
- Increase the amount of traffic access along the road, especially on county roads where the shoulders are limited.
- Reduce the need to set string lines in hazardous areas.
- Experience greater work access to the slip-form paver and surrounding area.
- Eliminate the need for string-line sensors on paving machines.
- Decrease the overall width of paving machines by eliminating need for sensors, making it easier and faster to cross bridges and other tight spots.



*Laser height gages*



*GPS installed on an all-terrain vehicle for staking or other survey work*



*Sample screen from stringless paving control computer*



*Stringless paving train*