

Iowa Ambient Air Monitoring 2023 Network Plan



Air Quality Bureau
Iowa Department of Natural Resources



Table of Contents

Table of Contents	2
Introduction	3
Ozone Monitoring Network Analysis	3
PM _{2.5} Monitoring Network Analysis	5
PM ₁₀ Monitoring Network Analysis	7
Sulfur Dioxide Monitoring Network Analysis	8
Nitrogen Dioxide Monitoring Network Analysis	11
Carbon Monoxide Monitoring Network Analysis	12
Toxics Monitoring Network Analysis	13
NCore Monitoring Network Analysis	13
Lead Monitoring Network Analysis	13
Appendix A: Federal Requirements for Annual Network Plans and Completion	15
Appendix B: SLAMS Network Modification	20
Appendix C: 2022 Iowa Ambient Air Monitoring Sites	21
Appendix D: 2022 Iowa Ambient Air Monitors	23
Appendix E: Population-Based Minimum Monitoring Requirements	34
Appendix F: Census Bureau 2022 Estimates for Iowa MSAs	36
Appendix G: 2022 Design Value Map for Ozone	37
Appendix H: Maps of SLAMS Monitoring Sites in MSAs on the State Border	38
Appendix I: Uniform Air Quality Index (AQI) and Daily Reporting	48
Appendix J: Federal Collocation Requirements and Operating Schedules	54
Appendix K: Collocated Monitoring Network Analysis	59
Appendix L: Iowa Ambient Air Monitoring Network Maps	69
Appendix M: Network Changes	75
Appendix N: 2022 Design Value Maps for PM _{2.5}	83
Appendix O: Federal Requirements for NCore Sites	85
Appendix P: Federal Requirements for Near-Road Sites	86
Appendix Q: Highest PM ₁₀ Values in Iowa MSAs 2020-2022	89
Appendix R: Federal Requirements for SO ₂ Sites	90
Appendix S: SO ₂ Data Requirements Rule	92
Appendix T: Sulfur Dioxide Population Weighted Emissions Index	95
Appendix U: Federal Requirements for Lead Sites	97
Appendix V: Lead (Pb) Emissions Inventory Memo	99

Introduction

States and other agencies delegated to perform air monitoring under the Clean Air Act are required to examine their networks annually to verify that they meet federal requirements ([Appendix A](#)). These requirements¹ include the number and type of monitors operated and the frequency of sampling. Certain monitors in the network, known as State and Local Air Monitoring Stations (SLAMS), are required by federal regulations and discontinuing a SLAMS monitor requires concurrence from the Environmental Protection Agency (EPA) ([Appendix B](#)). Special Purpose Monitors (SPMs) provide important additional air quality information (such as background concentrations for permitting activities^{2,3}), but changes to the SPM network do not require concurrence from EPA.

One of the requirements of the annual network plan is to provide specific information for monitors that produce data that may be compared with federal air standards. This information, along with information concerning various types of monitors operated in the Iowa air monitoring network, is contained in [Appendix C](#) and [Appendix D](#).

Ozone Monitoring Network Analysis

EPA's population-based monitoring requirements for ozone are reproduced in [Appendix E](#). These requirements apply to metropolitan statistical areas (MSAs)—more recently denoted as core based statistical areas (CBSAs) by the Census Bureau—and depend on the population of the MSA ([Appendix F](#)) and the ozone levels monitored in or downwind of the MSA over the past three years ([Appendix G](#)). Based on this information, the minimum number of population-based SLAMS ozone monitoring sites is indicated below:

MSA	Number of Monitoring Sites Required
Omaha-Council Bluffs, NE-IA	2
Des Moines-West Des Moines, IA	1
Davenport-Moline-Rock Island, IA-IL	2
Cedar Rapids, IA	1
Waterloo-Cedar Falls, IA	1
Sioux City, IA-NE-SD	1

In Iowa, there is one SLAMS monitoring site operated in the Omaha-Council Bluffs MSA, two SLAMS monitoring sites operated in the Des Moines MSA, two SLAMS monitoring sites

¹ For the convenience of the reader, relevant CFR sections are included in the appendices of this document. The CFR is updated continuously, for the latest version of the CFR see: [CFR Title 40](#)

² For examples of the way monitoring data is used to develop background concentrations for permitting activities, see the discussions of PM_{2.5}, NO₂ and SO₂ at: [Modeling Memos](#)

³ The federal statute that requires baseline ambient air quality data in an area before initiating construction of a new "major source" of air pollution is a download here: [US Code 2010](#)

operated in the Davenport-Moline-Rock Island MSA, one SLAMS monitoring site operated in the Cedar Rapids MSA, and one SLAMS monitoring site operated in the Waterloo-Cedar Falls MSA that fulfill the ozone monitoring requirements. The state of Iowa shares the responsibility for ozone monitoring in the Omaha-Council Bluffs MSA with Nebraska agencies, in the Sioux City MSA with South Dakota and Nebraska agencies, and in the Davenport-Moline-Rock Island MSA with Illinois agencies ([Appendix H](#)). Currently Nebraska agencies operate two SLAMS ozone sites in the Omaha, Nebraska MSA. Illinois agencies operate one SLAMS ozone site in Rock Island, Illinois in the Davenport-Moline-Rock Island, IA-IL MSA. South Dakota operated a required SLAMS site in the Sioux City, IA-NE-SD MSA, but the lease was not renewed and operation ended September 30, 2021. Please see discussion in [Appendix M](#) for the change in the South Dakota ozone network and regional planning for operation of a SLAMS ozone site representing the Sioux City MSA.

In addition to population-based requirements, each state is required to operate one multi-pollutant NCore site. Year-round ozone monitoring is required at an NCore site. Iowa monitors for ozone at its NCore site in Davenport to meet this requirement.

EPA's AQI reporting requirements for ozone are reproduced in [Appendix I](#). AQI reporting for ozone is required in MSAs with populations over 350,000. MSAs in this category include Omaha-Council Bluffs, Des Moines-West Des Moines, and Davenport-Moline-Rock Island ([Appendix F](#)). All Iowa ozone monitoring data, including data from each of these MSAs, is uploaded to EPA's [AirNow](#)⁴ real-time reporting system and included in the national ozone and AQI maps. Historical concentration data and AQI values are publicly available on EPA's [AirData](#)⁵ web site a few days after the data is uploaded to EPA. The DNR regularly updates a list of dates when monitoring sites record AQIs greater than 100 on its [web site](#).⁶ AQI and real-time information is also available on the [Polk County](#)⁷, [Linn County](#)⁸ and [State Hygienic Laboratory](#)⁹ websites.

EPA's collocated monitoring requirements are indicated in [Appendix J](#). A comprehensive comparison of Iowa's monitoring network to these requirements is located in [Appendix K](#). There are no EPA requirements for collocated ozone monitoring.

The total number of ozone monitoring sites needed to support the basic monitoring objectives of public data reporting, air quality mapping, compliance, and understanding ozone related atmospheric processes includes more sites than these minimum numbers. All Iowa ozone monitors are listed in [Appendix D](#) and displayed in [Appendix L](#).

⁴ [EPA AirNow](#)

⁵ [EPA Air Data](#)

⁶ [Iowa DNR Air Monitoring](#)

⁷ [Polk County Air Monitoring](#)

⁸ [Linn County Air Monitoring](#)

⁹ [SHL Real Time Data](#)

Changes to the ozone network that are expected to occur before the submission of the next network plan are indicated in [Appendix M](#). Other than the Sioux City MSA, Iowa's current ozone monitoring network meets federal requirements and will meet the requirements fully after the changes described in [Appendix M](#) occur.

PM_{2.5} Monitoring Network Analysis

EPA's population-based monitoring requirements for PM_{2.5} are contained in 40 CFR Part 58, Appendix D (reproduced in [Appendix E](#)). These requirements apply to metropolitan statistical areas (MSAs) and depend on the population of the MSA ([Appendix E](#)) and the PM_{2.5} levels monitored in the MSA over the past three years ([Appendix N](#)). Based on this information, the minimum number of required population-based SLAMS PM_{2.5} monitoring sites is indicated below:

MSA	Number of Monitoring Sites Required
Omaha-Council Bluffs, NE-IA	1
Des Moines-West Des Moines, IA	1

Iowa operates filter samplers at a SLAMS PM_{2.5} monitoring site in Des Moines. Iowa shares the responsibility for PM_{2.5} monitoring in the Omaha-Council Bluffs MSA with Nebraska agencies and four SLAMS PM_{2.5} monitoring sites are operated by Nebraska in the Omaha-Council Bluffs MSA ([Appendix H](#)).

In addition to population-based minimum requirements, 40 CFR Part 58 also specifies that each state operate at least one PM_{2.5} monitoring site to measure background concentrations, and at least one site to measure regional transport of PM_{2.5}. A SLAMS background monitoring site is located at Emmetsburg in Northwest Iowa, and SLAMS transport monitoring sites are located at Lake Sugema in Southeast Iowa and Viking Lake in Southwest Iowa.

In addition to these PM_{2.5} monitoring requirements, EPA requires that each state operate at least one multi-pollutant NCore site ([Appendix O](#)). Continuous and filter-based PM_{2.5} monitors as well as PM_{2.5} chemical speciation samplers are required at each NCore site. Iowa operates these three types of PM_{2.5} samplers at its NCore site in Davenport to meet this requirement.

For PM_{2.5}, there is both an annual and a 24-hour NAAQS. To be comparable to either PM_{2.5} NAAQS a site must be population-oriented. In 40 CFR Part 58, EPA defines a population-oriented monitoring site as follows:

Population-oriented monitoring (or sites) means residential areas, commercial areas, recreational areas, industrial areas where workers from more than one company are located, and other areas where a substantial number of people may spend a significant fraction of their day.

Following this definition, all PM_{2.5} monitoring sites in Iowa are population-oriented.

In a populated area near an industrial source, monitoring data may only be comparable to the 24-hour PM_{2.5} NAAQS. According to Subpart D of 40 CFR Part 58:

PM_{2.5} measurement data from monitors that are not representative of area-wide air quality but rather of relatively unique micro-scale, or localized hot spot, or unique middle-scale impact sites are not eligible for comparison to the annual PM_{2.5} NAAQS. PM_{2.5} measurement data from these monitors are eligible for comparison to the 24-hour PM_{2.5} NAAQS. For example, if a micro- or middle-scale PM_{2.5} monitoring site is adjacent to a unique dominating local PM_{2.5} source, then the PM_{2.5} measurement data from such a site would only be eligible for comparison to the 24-hour PM_{2.5} NAAQS.

Iowa has two population-oriented monitoring sites near industrial sources that produce data that may be compared to the 24-hour PM_{2.5} NAAQS, but not to the annual PM_{2.5} NAAQS. The PM_{2.5} monitoring sites near Chancy Park in Clinton (AQS ID 190450019), and Musser Park in Muscatine (AQS ID 191390020), are adjacent to industrial sources and are not comparable to the annual PM_{2.5} NAAQS.

EPA's AQI reporting requirements for PM_{2.5} are reproduced in [Appendix I](#). AQI reporting is required in MSAs with required PM_{2.5} monitors and populations over 350,000. MSA's in this population category include Omaha-Council Bluffs, Des Moines-West Des Moines, and Davenport-Moline-Rock Island ([Appendix F](#)). Nebraska provides real-time PM_{2.5} data for the Omaha-Council Bluffs MSA; Iowa provides real-time PM_{2.5} monitoring data for the Des Moines-West Des Moines, and Davenport-Moline-Rock Island MSAs. Real-time data is uploaded to EPA's [AirNow](#)¹⁰ real-time reporting system and included in the national AQI maps. Historical data and AQI values from continuous and filter samplers are publicly available on EPA's [AirData](#)¹¹ web site a few days after the data is uploaded to EPA. The DNR regularly updates a list of dates when monitoring sites record AQIs greater than 100 on its [web site](#).¹² AQI and real-time information is also available on the [Polk County](#),¹³ [Linn County](#)¹⁴ and [State Hygienic Laboratory](#)¹⁵ websites.

EPA's collocated monitoring requirements for PM_{2.5} are indicated in [Appendix J](#). Iowa's monitoring network meets these requirements ([Appendix K](#)).

40 CFR Part 58 specifies that the minimum frequency for manual PM_{2.5} sampling at required SLAMS sites is one sample every three days. Required SLAMS sites with a 24-hour design value

¹⁰ [EPA AirNow](#)

¹¹ [EPA Air Data](#)

¹² [Iowa DNR Air Monitoring](#)

¹³ [Polk County Air Monitoring](#)

¹⁴ [Linn County Air Monitoring](#)

¹⁵ [SHL Real Time Data](#)

within 5% of the 24-hour PM_{2.5} NAAQS (34 µg/m³ to 36 µg/m³) must assume a daily sampling schedule until the design value no longer meets the criteria for three consecutive years. The maximum 24-hour PM_{2.5} design values recorded in the Iowa Network for the past three years are: 2020: 23 µg/m³, 2021: 23 µg/m³, and 2022: 22 µg/m³.¹⁶ No PM_{2.5} samplers recorded design values from 34-36 µg/m³ for the past three years.

EPA also requires CBSAs with a population of 1,000,000 or more persons to collocate at least one PM_{2.5} monitor at a near-road NO₂ station ([Appendix P](#)). Iowa does not contain or share any MSAs with populations this large, so additional near-road monitors are not required.

The total number of PM_{2.5} monitoring sites needed to support the basic monitoring objectives of public data reporting, air quality mapping, compliance, and understanding PM_{2.5}-related atmospheric processes includes more sites than these minimum numbers. Iowa’s complete PM_{2.5} monitoring network is listed in [Appendix D](#) and displayed in [Appendix L](#). Note: The map of speciation sites in [Appendix L](#) includes sites where the full suite of PM_{2.5} speciation measurements (metals, ions and carbon) are performed on filter samples. Changes to monitors in the SLAMS and SPM PM_{2.5} network that are expected to occur before the submission of the next network plan are detailed in [Appendix M](#). Iowa’s current PM_{2.5} monitoring network meets federal requirements and will continue to meet the requirements after the changes described in [Appendix M](#) occur.

PM₁₀ Monitoring Network Analysis

EPA’s population-based monitoring requirements for PM₁₀ are reproduced in [Appendix E](#). These requirements apply to metropolitan statistical areas (MSAs) and depend on the population of the MSA ([Appendix F](#)) and PM₁₀ levels in the MSA ([Appendix Q](#)). Based on this information, the minimum numbers of population-based SLAMS PM₁₀ monitoring sites is indicated below:

MSA	Number of Monitoring Sites Required
Omaha-Council Bluffs, NE-IA	1-2
Des Moines-West Des Moines, IA	1-2
Davenport-Moline-Rock Island, IA-IL	1-2
Cedar Rapids, IA	0-1
Sioux City, IA-NE-SD	0

Iowa operates one SLAMS PM₁₀ monitoring site in the Des Moines-West Des Moines MSA, two in the Davenport-Moline-Rock Island MSA, and one in the Cedar Rapids MSA. Iowa shares the responsibility for PM₁₀ monitoring in the Omaha-Council Bluffs MSA with Nebraska agencies, and in the Davenport-Moline-Rock Island MSA with Illinois agencies ([Appendix H](#)). Currently three SLAMS PM₁₀ sites are operated by Nebraska in the Omaha MSA, but one site in Cass

¹⁶ See: Iowa PM_{2.5} Design Values for 2020, 2021, and 2022 under “Design Value Reports” at [Iowa DNR Air Monitoring](#)

County is source oriented and Nebraska does not consider it representative of the MSA. No SLAMS PM₁₀ monitors are operated by Illinois in the Davenport-Moline-Rock Island MSA.

In addition to population-oriented PM₁₀ monitoring requirements, EPA requires that each State operate at least one multi-pollutant NCore site ([Appendix O](#)). PM₁₀ samplers are required at each NCore site. Iowa operates a PM₁₀ sampler at its NCore site in Davenport to meet this requirement.

EPA's AQI reporting requirements for PM₁₀ are reproduced in [Appendix I](#). AQI reporting is required in MSAs with required PM₁₀ monitors and populations over 350,000. MSA's in this category include Omaha-Council Bluffs, Des Moines-West Des Moines, and Davenport-Moline-Rock Island ([Appendix F](#)). Nebraska provides real-time PM₁₀ data for the Omaha-Council Bluffs MSA. Iowa has only one site that produces real-time PM₁₀ monitoring data. It is located near Buffalo inside the Davenport-Moline-Rock Island MSA. A graph of the real-time data from this site is publicly available on the [SHL website](#).¹⁷ The AQI associated with PM₁₀ data from all filter samplers, including data from monitoring sites in each of the three MSA's, is publicly available on EPA's [Air Data](#)¹⁸ web site a few days after the data is uploaded to EPA. The DNR regularly updates a list of dates when monitoring sites recorded AQIs greater than 100 on its [web site](#).¹⁹

EPA's collocated monitoring requirements for PM₁₀ are indicated in [Appendix J](#). Iowa's monitoring network meets these requirements ([Appendix K](#)).

Iowa's complete PM₁₀ monitoring network is listed in [Appendix D](#) and displayed in [Appendix L](#). Changes to monitors in the SLAMS and SPM PM₁₀ network that are expected to occur before the submission of the next network plan are detailed in [Appendix M](#). Iowa's current PM₁₀ monitoring network meets federal requirements and will continue to meet the requirements after the changes described in [Appendix M](#) occur.

Sulfur Dioxide Monitoring Network Analysis

Federal requirements for SO₂ monitoring are reproduced in [Appendix R](#) and [Appendix S](#). These rules require monitors in populated areas with high SO₂ emissions as well as characterizing the SO₂ levels around large sources (>2,000 tons per year) with either monitoring or modeling data.

To implement the populated area requirements EPA uses the population weighted emissions index (PWEI) to determine if SO₂ monitoring is required in a CBSA. The PWEI is calculated by multiplying the population of the CBSA by the total tons of SO₂ emissions in the CBSA and dividing by 1,000,000. The PWEI for each Iowa CBSA is computed in [Appendix T](#). Based on this information, the minimum number of SLAMS SO₂ monitoring sites for each Iowa CBSA is indicated below:

¹⁷ [SHL Real Time Data](#)

¹⁸ [EPA Air Data](#)

¹⁹ [Iowa DNR Air Monitoring](#)

CBSA	Number of Monitoring Sites Required
Omaha-Council Bluffs, NE-IA	1

Nebraska’s NCore site (AQS ID 310550019) is located in Omaha and the required SO₂ monitor at this location fulfills this PWEI requirement.

In addition to the PWEI-based and large source monitoring requirements, sulfur dioxide is included in the suite of pollutants to be monitored at EPA National Core (NCore) monitoring sites. Iowa operates a sulfur dioxide analyzer at its NCore site in Davenport to meet this requirement.

After a new NAAQS is promulgated, states are required to designate the attainment status of the counties of their state relative to the new NAAQS. In the case of the 1-hour SO₂ NAAQS finalized on 6/22/2010, the size of the national SO₂ monitoring network was deemed too small to establish whether ambient SO₂ levels near large SO₂ emitters would meet the new more stringent 1-hour standard. On 8/21/2015, EPA finalized a rule (known as the Data Requirements Rule or “DRR”) to clarify states responsibilities in establishing the NAAQS attainment near large SO₂ emitters ([Appendix S](#)). As defined in this rule, a large SO₂ emitter is defined as one that emits more than 2,000 tons per year (tpy) of SO₂. Under the provisions of the DRR, these large sources must either take permit limits to reduce their emissions below the 2,000 tpy threshold, or establish the attainment status near the source by performing ambient air monitoring or dispersion modeling.

According to deadlines of the DRR, the State was required to send its list of facilities that emit over 2,000 tpy to EPA by January 15, 2016 and indicate whether monitoring, modeling or emissions limits will be used to comply with the rule by July 1, 2016. Monitoring required under the rule needed to be initiated by January 1, 2017. Emissions limits reducing facility emissions below the 2,000 tpy threshold needed to be in place by January 13, 2017. Dispersion modeling required under the rule needed to be submitted to EPA by January 13, 2017.

DNR sent its list of affected facilities to EPA on December 15, 2015, and indicated its choice of compliance method for each affected facility in a letter to EPA on June 20, 2016.²⁰ No Iowa facilities opted to use monitoring to comply with the DRR. The Iowa DNR²¹ and EPA²² exchanged technical analyses, and EPA posted designations under the DRR rule in December 2017.²³

²⁰ [Iowa Source Characterization](#)

²¹ [Iowa Technical Support](#)

²² [EPA Round 3 Designations](#)

²³ [EPA Final Sulfur Dioxide Designations](#)

The DRR also requires annual documentation of the SO₂ emissions of each affected facility in cases where modeling of actual emissions served as the basis for designating that area to be in attainment with the NAAQS. These annual requirements are fulfilled in a reports posted to the DNR's [Air Quality Implementation Plans](#) website, in the "Designation Recommendations" section, under the "2010 SO₂ (Includes Muscatine 1-hour SO₂ Nonattainment Area)" subsection.²⁴

In the Omaha-Council Bluffs MSA, there was a facility subject to the DRR on the Nebraska side that opted for monitoring. The Nebraska DEQ /Douglas County Health Department sited a monitor to establish the attainment status near this facility (OPPD North Omaha Power station), and began operation of a SLAMs SO₂ site (AQS ID 310550057) near the facility in 2017. Monitoring at this site ended at the end of 2020 with EPA approval.

EPA's AQI reporting requirements for SO₂ are reproduced in [Appendix I](#). AQI reporting is required in MSAs with required SO₂ monitors and populations over 350,000. MSAs in this population category include Omaha-Council Bluffs, Des Moines-West Des Moines, and Davenport-Moline-Rock Island ([Appendix F](#)). As indicated above, there are requirements for SO₂ monitors in Omaha and Davenport, but not in Des Moines. Nebraska provides real-time SO₂ data for the Omaha-Council Bluffs MSA; Iowa provides real-time SO₂ monitoring data for the Davenport-Moline-Rock Island MSA.

Real-time data is uploaded to EPA's [AirNow](#)²⁵ real-time reporting system. Historical concentration data and AQI values are publicly available on EPA's [AirData](#)²⁶ web site a few days after the data is uploaded to EPA. The DNR regularly updates a list of dates when monitoring sites recorded AQIs greater than 100 on its [web site](#).²⁷ AQI and real-time information is also available on the [Polk County](#),²⁸ [Linn County](#)²⁹ and [State Hygienic Laboratory](#)³⁰ websites.

EPA's collocated monitoring requirements are indicated in [Appendix J](#). A comprehensive comparison of Iowa's monitoring network to these requirements is located in [Appendix K](#). There are no EPA requirements for collocated SO₂ monitoring.

Existing SO₂ monitors are listed in [Appendix D](#) and displayed in [Appendix L](#). Changes to the SO₂ network that are anticipated before the submission of the next network plan are indicated in [Appendix M](#). Iowa's current SO₂ monitoring network meets federal requirements and will continue to meet the requirements after the changes described in [Appendix M](#) occur.

²⁴ [DNR Air Quality Implementation Plans](#)

²⁵ [EPA AirNow](#)

²⁶ [EPA Air Data](#)

²⁷ [Iowa DNR Air Monitoring](#)

²⁸ [Polk County Air Monitoring](#)

²⁹ [Linn County Air Monitoring](#)

³⁰ [SHL Real Time Data](#)

Nitrogen Dioxide Monitoring Network Analysis

On January 22, 2010, the U.S. Environmental Protection Agency revised the nitrogen dioxide (NO₂) NAAQS. The new NAAQS included population-based monitoring requirements and traffic-based (near-road) monitoring requirements.

EPA's population-based NO₂ monitoring requirements are reproduced in [Appendix E](#). EPA requires one monitor in any CBSA with a population of more than 1 million in order to measure community-wide concentrations. Iowa does not contain or share any MSAs with populations this large and these monitors are not required.

EPA's updated near-road based NO₂ monitoring requirements are reproduced in [Appendix P](#). There are no near-road monitors required in Iowa based on the updated federal requirements. At NCore sites, EPA normally requires NO_y instead of NO₂ monitoring in order to quantify more of the oxidation products of NO. These additional oxidation products are relevant to secondary formation of ozone and PM_{2.5}.

There are currently no minimum federal requirements for NO₂ monitors applicable to Iowa, and there are no monitors designated as SLAMS monitors in the Iowa network. SPM NO₂ monitors are operated to provide a general knowledge of pollutant levels and to support permitting activities.

EPA's AQI reporting requirements for NO₂ are reproduced in [Appendix I](#). As indicated above, Iowa does not contain or share any MSAs that require NO₂ monitoring. AQI reporting is required in MSAs with required NO₂ monitors and populations over 350,000. Iowa provides real-time NO₂ monitoring data for the Des Moines-West Des Moines MSA and at a background site near Lake Sugema in the southeast corner of the state.

Real-time data is uploaded to EPA's [AirNow](#)³¹ real-time reporting system. Historical concentration data and the AQI are publicly available on EPA's [AirData](#)³² web site a few days after the data is uploaded to EPA. The DNR regularly updates a list of dates and locations of recorded AQIs greater than 100 on its [web site](#).³³ AQI information is also available on the [Polk County](#),³⁴ [Linn County](#)³⁵ and [State Hygienic Laboratory](#)³⁶ websites.

EPA's collocated monitoring requirements are indicated in [Appendix J](#). A comprehensive comparison of Iowa's monitoring network to these requirements is located in [Appendix K](#). There are no EPA requirements for collocated NO₂ monitoring.

³¹ [EPA AirNow](#)

³² [EPA Air Data](#)

³³ [Iowa DNR Air Monitoring](#)

³⁴ [Polk County Air Monitoring](#)

³⁵ [Linn County Air Monitoring](#)

³⁶ [SHL Real Time Data](#)

NO₂ monitors are listed in [Appendix D](#) and displayed in [Appendix L](#). Changes to SPM monitors that are anticipated before the submission of the next network plan are indicated in [Appendix M](#). Iowa's current NO₂ monitoring network meets federal requirements and will continue to meet the requirements after the changes described in [Appendix M](#) occur.

Carbon Monoxide Monitoring Network Analysis

EPA requires that each State operate at least one multi-pollutant NCore site ([Appendix O](#)). Carbon monoxide monitoring is required at each NCore site. Iowa operates a carbon monoxide monitor at its NCore site in Davenport to meet this requirement.

EPA also requires CBSA's with a population of 1,000,000 or more persons to collocate at least one CO monitor at a near-road NO₂ station ([Appendix P](#)). Iowa does not contain or share any MSAs with populations this large, so these near-road CO monitors are not required.

EPA's AQI reporting requirements for CO are reproduced in [Appendix I](#). AQI reporting is required in MSAs with required CO monitors and populations over 350,000. MSAs in this population category include Omaha-Council Bluffs, Des Moines-West Des Moines, and Davenport-Moline-Rock Island ([Appendix F](#)). Nebraska provides real-time CO data for the Omaha-Council Bluffs MSA. There is no monitoring requirement for the Des Moines-West Des Moines MSA, and Iowa provides real-time monitoring for the Davenport-Moline-Rock Island MSA.

Real-time data is uploaded to EPA's [AirNow](#)³⁷ real-time reporting system. Historical data and the AQI are publicly available on EPA's [AirData](#)³⁸ web site a few days after the data is uploaded to EPA. The DNR regularly updates a list of dates when monitoring sites recorded AQIs greater than 100 on its [web site](#).³⁹ AQI information is also available on the [Polk County](#),⁴⁰ [Linn County](#)⁴¹ and [State Hygienic Laboratory](#)⁴² websites.

EPA's collocated monitoring requirements are indicated in [Appendix J](#). A comprehensive comparison of Iowa's monitoring network to these requirements is located in [Appendix K](#). There are no EPA requirements for collocated CO monitoring.

Iowa's carbon monoxide monitor is listed in [Appendix D](#) and displayed in [Appendix L](#). There are no planned reductions to the SLAMS monitoring network for carbon monoxide scheduled before submission of the next network plan. Changes to SPM monitors in the CO network that are anticipated before the submission of the next network plan are indicated in [Appendix M](#).

³⁷ [EPA AirNow](#)

³⁸ [EPA Air Data](#)

³⁹ [Iowa DNR Air Monitoring](#)

⁴⁰ [Polk County Air Monitoring](#)

⁴¹ [Linn County Air Monitoring](#)

⁴² [SHL Real Time Data](#)

Iowa's current carbon monoxide monitoring network meets federal requirements and will continue to meet the requirements after the changes described in [Appendix M](#) occur.

Toxics Monitoring Network Analysis

There are no federal requirements for minimum numbers of air toxics sites contained in 40 CFR Part 58.

Iowa currently operates five SPM air toxics sites. Details concerning Iowa's air toxics network are contained in [Appendix D](#) and displayed in [Appendix L](#). Changes to SPM monitors in the toxics network that are anticipated before the submission of the next network plan are indicated in [Appendix M](#).

NCore Monitoring Network Analysis

Requirements for a multi-pollutant "NCore" site are contained in 40 CFR Part 58, and reproduced in [Appendix O](#). The Department operates an NCore site at Jefferson School in Davenport (AQS ID 191630015) to meet this requirement.

Lead Monitoring Network Analysis

EPA requires source-oriented SLAMS lead monitoring near industries that emit over 0.5 tons per year (tpy) of lead. The rule allows for a waiver of monitoring requirements if air dispersion modeling predicts ambient air concentrations less than half the NAAQS. These waivers must be renewed as an element of each State's five-year network assessment. Current federal lead monitoring rules are reproduced in [Appendix U](#).

According to the Department's latest (2021 NEI) emissions estimates ([Appendix V](#)), there are no facilities in Iowa with lead emissions of 0.5 tpy or greater.

The Department sited a SLAMS lead monitoring site in Council Bluffs near Griffin Pipe in 2009. The site recorded levels above the National Ambient Air Quality Standard (NAAQS) for lead in 2010 and 2012. The area around Griffin Pipe was declared a non-attainment area by EPA late in 2011.⁴³ The Griffin Pipe Plant was closed indefinitely in May of 2014, after acquisition of Griffin Pipe by American Pipe.⁴⁴ The DNR submitted a State Implementation Plan (SIP) in January 2015 that provides for ongoing attainment of the lead NAAQS by establishing federally enforceable permit limits at Griffin Pipe and a nearby facility, Alter Metal Recycling.⁴⁵ EPA re-designated the area as attainment on 10/4/2018.⁴⁶

⁴³ [Federal Register Lead Designations](#)

⁴⁴ [Foundry Magazine Article Griffin Pipe](#)

⁴⁵ [Iowa Lead SIP](#)

⁴⁶ [EPA Iowa SIP Status](#)

Startup issues with new samplers installed in December of 2021 caused a loss of all but one December sample. This data completeness issue will result in a change of classification from attainment to attainment/unclassifiable for the site for the 2019-2021, 2020-2022, and 2021-2023 periods. No exceedances of the standard were measured over the 2019-2021 period and the site is currently considered attainment/unclassifiable. The most recent but incomplete data from the site indicates a design value of $0.12 \mu\text{g}/\text{m}^3$ or 80% of the standard for the 2020-2022 period.

In late 2021 the DNR learned that multiple buildings from the former (Griffin Pipe) facility would be demolished. After consultation with EPA Region 7 the sampling schedule was enhanced beginning in February of 2022 to better estimate any ambient air impacts from the demolition. No exceedances were recorded during the demolition and the enhanced sampling was discontinued.

EPA's collocated monitoring requirements for lead are indicated in [Appendix J](#). Iowa's monitoring network meets these requirements ([Appendix K](#)).

The location of Iowa's lead monitoring site is listed in [Appendix D](#) and displayed in [Appendix L](#). There are no planned reductions to the SLAMS monitoring network for lead scheduled before submission of the next network plan. Iowa's current lead monitoring network meets federal requirements and will continue to meet the requirements after the changes described in [Appendix M](#) occur.

Appendix A: Federal Requirements for Annual Network Plans and Completion

40 CFR Part 58, § 58.10 Annual monitoring network plan and periodic network assessment.

(a)(1) Beginning July 1, 2007, the state, or where applicable local, agency shall submit to the Regional Administrator an annual monitoring network plan which shall provide for the documentation of the establishment and maintenance of an air quality surveillance system that consists of a network of SLAMS monitoring stations that can include FRM, FEM, and ARM monitors that are part of SLAMS, NCore, CSN, PAMS, and SPM stations. The plan shall include a statement of whether the operation of each monitor meets the requirements of appendices A, B, C, D, and E of this part, where applicable. The Regional Administrator may require additional information in support of this statement. The annual monitoring network plan must be made available for public inspection and comment for at least 30 days prior to submission to the EPA and the submitted plan shall include and address, as appropriate, any received comments.

(2) Any annual monitoring network plan that proposes network modifications (including new or discontinued monitoring sites, new determinations that data are not of sufficient quality to be compared to the NAAQS, and changes in identification of monitors as suitable or not suitable for comparison against the annual PM_{2.5} NAAQS) to SLAMS networks is subject to the approval of the EPA Regional Administrator, who shall approve or disapprove the plan within 120 days of submission of a complete plan to the EPA.

(3) The plan for establishing required NCore multipollutant stations shall be submitted to the Administrator not later than July 1, 2009. The plan shall provide for all required stations to be operational by January 1, 2011.

(4) A plan for establishing source-oriented Pb monitoring sites in accordance with the requirements of appendix D to this part for Pb sources emitting 1.0 tpy or greater shall be submitted to the EPA Regional Administrator no later than July 1, 2009, as part of the annual network plan required in paragraph (a)(1) of this section. The plan shall provide for the required source-oriented Pb monitoring sites for Pb sources emitting 1.0 tpy or greater to be operational by January 1, 2010. A plan for establishing source-oriented Pb monitoring sites in accordance with the requirements of appendix D to this part for Pb sources emitting equal to or greater than 0.50 tpy but less than 1.0 tpy shall be submitted to the EPA Regional Administrator no later than July 1, 2011. The plan shall provide for the required source-oriented Pb monitoring sites for Pb sources emitting equal to or greater than 0.50 tpy but less than 1.0 tpy to be operational by December 27, 2011.

(5)(i) A plan for establishing or identifying an area-wide NO₂ monitor, in accordance with the requirements of Appendix D, section 4.3.3 to this part, shall be submitted as part of the Annual Monitoring Network Plan to the EPA Regional Administrator by July 1, 2012. The plan shall provide for these required monitors to be operational by January 1, 2013.

(ii) A plan for establishing or identifying any NO₂ monitor intended to characterize vulnerable and susceptible populations, as required in Appendix D, section 4.3.4 to this part, shall be submitted as part of the Annual Monitoring Network Plan to the EPA Regional Administrator by July 1, 2012. The plan shall provide for these required monitors to be operational by January 1, 2013.

(iii) A plan for establishing a single near-road NO₂ monitor in CBSAs having 1,000,000 or more persons, in accordance with the requirements of Appendix D, section 4.3.2 to this part, shall be submitted as part of the Annual Monitoring Network Plan to the EPA Regional Administrator by July 1, 2013. The plan shall provide for these required monitors to be operational by January 1, 2014.

(iv) A plan for establishing a second near-road NO₂ monitor in any CBSA with a population of 2,500,000 persons or more, or a second monitor in any CBSA with a population of 1,000,000 or more persons that has one or more roadway segments with 250,000 or greater AADT counts, in accordance with the requirements of appendix D, section 4.3.2 to this part, shall be submitted as part of the Annual Monitoring Network Plan to the EPA Regional Administrator by July 1, 2014. The plan shall provide for these required monitors to be operational by January 1, 2015.

(6) A plan for establishing SO₂ monitoring sites in accordance with the requirements of appendix D to this part shall be submitted to the EPA Regional Administrator by July 1, 2011 as part of the annual network plan required in paragraph (a) (1). The plan shall provide for all required SO₂ monitoring sites to be operational by January 1, 2013.

(7) A plan for establishing CO monitoring sites in accordance with the requirements of appendix D to this part shall be submitted to the EPA Regional Administrator. Plans for required CO monitors shall be submitted at least six months prior to the date such monitors must be established as required by section 58.13.

(8)(i) A plan for establishing near-road PM_{2.5} monitoring sites in CBSAs having 2.5 million or more persons, in accordance with the requirements of appendix D to this part, shall be submitted as part of the annual monitoring network plan to the EPA Regional Administrator by July 1, 2014. The plan shall provide for these required monitoring stations to be operational by January 1, 2015.

(ii) A plan for establishing near-road PM_{2.5} monitoring sites in CBSAs having 1 million or more persons, but less than 2.5 million persons, in accordance with the requirements of appendix D to this part, shall be submitted as part of the annual monitoring network plan to the EPA Regional Administrator by July 1, 2016. The plan shall provide for these required monitoring stations to be operational by January 1, 2017.

(9) The annual monitoring network plan shall provide for the required O₃ sites to be operating on the first day of the applicable required O₃ monitoring season in effect on January 1, 2017 as listed in Table D-3 of appendix D of this part.

(10) A plan for making Photochemical Assessment Monitoring Stations (PAMS) measurements, if applicable, in accordance with the requirements of appendix D paragraph 5(a) of this part shall be submitted to the EPA Regional Administrator no later than July 1, 2018. The plan shall provide for the required PAMS measurements to begin by June 1, 2019.

(11) An Enhanced Monitoring Plan for O₃, if applicable, in accordance with the requirements of appendix D paragraph 5(h) of this part shall be submitted to the EPA Regional Administrator no later than October 1, 2019 or two years following the effective date of a designation to a classification of Moderate or above O₃ nonattainment, whichever is later.

(12) A detailed description of the PAMS network being operated in accordance with the requirements of appendix D to this part shall be submitted as part of the annual monitoring network plan for review by the EPA Administrator. The PAMS Network Description described in section 5 of appendix D may be used to meet this requirement.

(b) The annual monitoring network plan must contain the following information for each existing and proposed site:

(1) The AQS site identification number.

(2) The location, including street address and geographical coordinates.

(3) The sampling and analysis method(s) for each measured parameter.

(4) The operating schedules for each monitor.

(5) Any proposals to remove or move a monitoring station within a period of 18 months following plan submittal.

(6) The monitoring objective and spatial scale of representativeness for each monitor as defined in appendix D to this part.

(7) The identification of any sites that are suitable and sites that are not suitable for comparison against the annual PM_{2.5} NAAQS as described in §58.30.

(8) The MSA, CBSA, CSA or other area represented by the monitor.

(9) The designation of any Pb monitors as either source-oriented or non-source-oriented according to Appendix D to 40 CFR part 58.

(10) Any source-oriented monitors for which a waiver has been requested or granted by the EPA Regional Administrator as allowed for under paragraph 4.5(a)(ii) of Appendix D to 40 CFR part 58.

(11) Any source-oriented or non-source-oriented site for which a waiver has been requested or granted by the EPA Regional Administrator for the use of Pb-PM₁₀ monitoring in lieu of Pb-TSP monitoring as allowed for under paragraph 2.10 of Appendix C to 40 CFR part 58.

(12) The identification of required NO₂ monitors as near-road, area-wide, or vulnerable and susceptible population monitors in accordance with Appendix D, section 4.3 of this part.

(13) The identification of any PM_{2.5} FEMs and/or ARMs used in the monitoring agency's network where the data are not of sufficient quality such that data are not to be compared to the NAAQS. For required SLAMS where the agency identifies that the PM_{2.5} Class III FEM or ARM does not produce data of sufficient quality for comparison to the NAAQS, the monitoring agency must

ensure that an operating FRM or filter-based FEM meeting the sample frequency requirements described in §58.12 or other Class III PM_{2.5} FEM or ARM with data of sufficient quality is operating and reporting data to meet the network design criteria described in appendix D to this part.

(c) The annual monitoring network plan must document how state and local agencies provide for the review of changes to a PM_{2.5} monitoring network that impact the location of a violating PM_{2.5} monitor. The affected state or local agency must document the process for obtaining public comment and include any comments received through the public notification process within their submitted plan.

(d) The state, or where applicable local, agency shall perform and submit to the EPA Regional Administrator an assessment of the air quality surveillance system every 5 years to determine, at a minimum, if the network meets the monitoring objectives defined in appendix D to this part, whether new sites are needed, whether existing sites are no longer needed and can be terminated, and whether new technologies are appropriate for incorporation into the ambient air monitoring network. The network assessment must consider the ability of existing and proposed sites to support air quality characterization for areas with relatively high populations of susceptible individuals (e.g., children with asthma), and, for any sites that are being proposed for discontinuance, the effect on data users other than the agency itself, such as nearby states and tribes or health effects studies. The state, or where applicable local, agency must submit a copy of this 5-year assessment, along with a revised annual network plan, to the Regional Administrator. The assessments are due every five years beginning July 1, 2010.

(e) All proposed additions and discontinuations of SLAMS monitors in annual monitoring network plans and periodic network assessments are subject to approval according to §58.14.

[71 FR 61298, Oct. 17, 2006, as amended at 72 FR 32210, June 12, 2007; 73 FR 67059, Nov. 12, 2008; 73 FR 77517, Dec. 19, 2008; 75 FR 6534, Feb. 9, 2010; 75 FR 35601, June 22, 2010; 75 FR 81137, Dec. 27, 2010; 76 FR 54341, Aug. 31, 2011; 78 FR 16188, Mar. 14, 2013; 78 FR 3282, Jan. 15, 2013; 80 FR 65466, Oct. 26, 2015; 81 FR 17279, Mar. 28, 2016; 81 FR 96388, Dec. 30, 2016]

...

§58.11 Network technical requirements.

(a)(1) State and local governments shall follow the applicable quality assurance criteria contained in appendix A to this part when operating the SLAMS networks.

(2) Beginning January 1, 2009, State and local governments shall follow the quality assurance criteria contained in appendix A to this part that apply to SPM sites when operating any SPM site which uses a FRM, FEM, or ARM and meets the requirements of appendix E to this part, unless the Regional Administrator approves an alternative to the requirements of appendix A with respect to such SPM sites because meeting those requirements would be physically and/or financially impractical due to physical conditions at the monitoring site and the requirements are not essential to achieving the intended data objectives of the SPM site. Alternatives to the requirements of appendix A may be approved for an SPM site as part of the approval of the annual monitoring plan, or separately.

(3) The owner or operator of an existing or a proposed source shall follow the quality assurance criteria in appendix B to this part that apply to PSD monitoring when operating a PSD site.

(b) State and local governments must follow the criteria in appendix C to this part to determine acceptable monitoring methods or instruments for use in SLAMS networks. Appendix C criteria are optional at SPM stations.

(c) State and local governments must follow the network design criteria contained in appendix D to this part in designing and maintaining the SLAMS stations. The final network design and all changes in design are subject to approval of the Regional Administrator. NCore and STN network design and changes are also subject to approval of the Administrator. Changes in SPM stations do not require approvals, but a change in the designation of a monitoring site from SLAMS to SPM requires approval of the Regional Administrator.

(d) State and local governments must follow the criteria contained in appendix E to this part for siting monitor inlets, paths or probes at SLAMS stations. Appendix E adherence is optional for SPM stations.

(e) State and local governments must assess data from Class III PM_{2.5} FEM and ARM monitors operated within their network using the performance criteria described in table C-4 to subpart C of part 53 of this chapter, for cases where the data are identified as not of sufficient comparability to a collocated FRM, and the monitoring agency requests that the FEM or ARM data should not be

used in comparison to the NAAQS. These assessments are required in the monitoring agency's annual monitoring network plan described in §58.10(b) for cases where the FEM or ARM is identified as not of sufficient comparability to a collocated FRM. For these collocated PM_{2.5} monitors the performance criteria apply with the following additional provisions:

- (1) The acceptable concentration range (R_j), µg/m³ may include values down to 0 µg/m³.
- (2) The minimum number of test sites shall be at least one; however, the number of test sites will generally include all locations within an agency's network with collocated FRMs and FEMs or ARMs.
- (3) The minimum number of methods shall include at least one FRM and at least one FEM or ARM.
- (4) Since multiple FRMs and FEMs may not be present at each site; the precision statistic requirement does not apply, even if precision data are available.
- (5) All seasons must be covered with no more than thirty-six consecutive months of data in total aggregated together.
- (6) The key statistical metric to include in an assessment is the bias (both additive and multiplicative) of the PM_{2.5} continuous FEM(s) compared to a collocated FRM(s). Correlation is required to be reported in the assessment, but failure to meet the correlation criteria, by itself, is not cause to exclude data from a continuous FEM monitor.

[71 FR 61298, Oct. 17, 2006, as amended at 78 FR 3282, Jan. 15, 2013; 80 FR 65466, Oct. 26, 2015; 81 FR 17279, Mar. 28, 2016]

40 CFR Part 58, § 58.13 Monitoring network completion.

- (a) The network of NCore multipollutant sites must be physically established no later than January 1, 2011, and at that time, operating under all of the requirements of this part, including the requirements of appendices A, C, D, E, and G to this part. NCore sites required to conduct Pb monitoring as required under 40 CFR part 58 appendix D paragraph 3(b), or approved alternative non-source-oriented Pb monitoring sites, shall begin Pb monitoring in accordance with all of the requirements of this part, including the requirements of appendices A, C, D, E, and G to this part no later than December 27, 2011.
- (b) Notwithstanding specific dates included in this part, beginning January 1, 2008, when existing networks are not in conformance with the minimum number of required monitors specified in this part, additional required monitors must be identified in the next applicable annual monitoring network plan, with monitoring operation beginning by January 1 of the following year. To allow sufficient time to prepare and comment on Annual Monitoring Network Plans, only monitoring requirements effective 120 days prior to the required submission date of the plan (i.e., 120 days prior to July 1 of each year) shall be included in that year's annual monitoring network plan.
- (c) The NO₂ monitors required under Appendix D, section 4.3 of this part must be physically established and operating under all of the requirements of this part, including the requirements of appendices A, C, D, and E to this part, no later than:
 - (1) January 1, 2013, for area-wide NO₂ monitors required in Appendix D, section 4.3.3;
 - (2) January 1, 2013, for NO₂ monitors intended to characterize vulnerable and susceptible populations that are required in Appendix D, section 4.3.4;
 - (3) January 1, 2014, for an initial near-road NO₂ monitor in CBSAs having 1,000,000 million or more persons that is required in Appendix D, section 4.3.2;
 - (4) January 1, 2015, for a second near-road NO₂ monitor in CBSAs that have a population of 2,500,000 or more persons or a second monitor in any CBSA with a population of 1,000,000 or more persons that has one or more roadway segments with 250,000 or greater AADT counts that is required in appendix D, section 4.3.2.

- (d) The network of SO₂ monitors must be physically established no later than January 1, 2013, and at that time, must be operating under all of the requirements of this part, including the requirements of appendices A, C, D, and E to this part.
- (e) The CO monitors required under Appendix D, section 4.2 of this part must be physically established and operating under all of the requirements of this part, including the requirements of appendices A, C, D, and E to this part, no later than:
 - (1) January 1, 2015 for CO monitors in CBSAs having 2.5 million persons or more; or
 - (2) January 1, 2017 for other CO monitors.
- (f) PM_{2.5} monitors required in near-road environments as described in appendix D to this part, must be physically established and operating under all of the requirements of this part, including the requirements of appendices A, C, D, and E to this part, no later than:
 - (1) January 1, 2015 for PM_{2.5} monitors in CBSAs having 2.5 million persons or more; or
 - (2) January 1, 2017 for PM_{2.5} monitors in CBSAs having 1 million or more, but less than 2.5 million persons.
- (g) The O₃ monitors required under appendix D, section 4.1 of this part must operate on the first day of the applicable required O₃ monitoring season in effect January 1, 2017.
- (h) The Photochemical Assessment Monitoring sites required under appendix D of this part, section 5(a), must be physically established and operating under all of the requirements of this part, including the requirements of appendix A, C, D, and E of this part, no later than June 1, 2021.

[71 FR 61298, Oct. 17, 2006, as amended at 73 FR 67059, Nov. 12, 2008; 75 FR 6534, Feb. 9, 2010; 75 FR 35601, June 22, 2010; 75 FR 81137, Dec. 27, 2010; 76 FR 54341, Aug. 31, 2011; 78 FR 16188, Mar. 14, 2013; 78 FR 3283, Jan. 15, 2013; 80 FR 65466, Oct. 26, 2015; 81 FR 96388, Dec. 30, 2016; 85 FR 837, Jan. 8, 2020]

Appendix B: SLAMS Network Modification

40 CFR Part 58, § 58.14 System modification.

(a) The state, or where appropriate local, agency shall develop a network modification plan and schedule to modify the ambient air quality monitoring network that addresses the findings of the network assessment required every 5 years by §58.10(d). The network modification plan shall be submitted as part of the Annual Monitoring Network Plan that is due no later than the year after submittal of the network assessment.

(b) Nothing in this section shall preclude the State, or where appropriate local, agency from making modifications to the SLAMS network for reasons other than those resulting from the periodic network assessments. These modifications must be reviewed and approved by the Regional Administrator. Each monitoring network may make or be required to make changes between the 5-year assessment periods, including for example, site relocations or the addition of PAMS networks in bumped-up ozone nonattainment areas. These modifications must address changes invoked by a new census and changes due to changing air quality levels. The State, or where appropriate local, agency shall provide written communication describing the network changes to the Regional Administrator for review and approval as these changes are identified.

(c) State, or where appropriate, local agency requests for SLAMS monitor station discontinuation, subject to the review of the Regional Administrator, will be approved if any of the following criteria are met and if the requirements of appendix D to this part, if any, continue to be met. Other requests for discontinuation may also be approved on a case-by-case basis if discontinuance does not compromise data collection needed for implementation of a NAAQS and if the requirements of appendix D to this part, if any, continue to be met.

(1) Any PM_{2.5}, O₃, CO, PM₁₀, SO₂, Pb, or NO₂ SLAMS monitor which has shown attainment during the previous five years, that has a probability of less than 10 percent of exceeding 80 percent of the applicable NAAQS during the next three years based on the levels, trends, and variability observed in the past, and which is not specifically required by an attainment plan or maintenance plan. In a nonattainment or maintenance area, if the most recent attainment or maintenance plan adopted by the State and approved by EPA contains a contingency measure to be triggered by an air quality concentration and the monitor to be discontinued is the only SLAMS monitor operating in the nonattainment or maintenance area, the monitor may not be discontinued.

(2) Any SLAMS monitor for CO, PM₁₀, SO₂, or NO₂ which has consistently measured lower concentrations than another monitor for the same pollutant in the same county (or portion of a county within a distinct attainment area, nonattainment area, or maintenance area, as applicable) during the previous five years, and which is not specifically required by an attainment plan or maintenance plan, if control measures scheduled to be implemented or discontinued during the next five years would apply to the areas around both monitors and have similar effects on measured concentrations, such that the retained monitor would remain the higher reading of the two monitors being compared.

(3) For any pollutant, any SLAMS monitor in a county (or portion of a county within a distinct attainment, nonattainment, or maintenance area, as applicable) provided the monitor has not measured violations of the applicable NAAQS in the previous five years, and the approved SIP provides for a specific, reproducible approach to representing the air quality of the affected county in the absence of actual monitoring data.

(4) A PM_{2.5} SLAMS monitor which EPA has determined cannot be compared to the relevant NAAQS because of the siting of the monitor, in accordance with §58.30.

(5) A SLAMS monitor that is designed to measure concentrations upwind of an urban area for purposes of characterizing transport into the area and that has not recorded violations of the relevant NAAQS in the previous five years, if discontinuation of the monitor is tied to start-up of another station also characterizing transport.

(6) A SLAMS monitor not eligible for removal under any of the criteria in paragraphs (c)(1) through (c)(5) of this section may be moved to a nearby location with the same scale of representation if logistical problems beyond the State's control make it impossible to continue operation at its current site.

[71 FR 61298, Oct. 17, 2006, as amended at 81 FR 17280, Mar. 28, 2016]

Appendix C: 2022 Iowa Ambient Air Monitoring Sites

City	Site	Address	County	MSA	Latitude	Longitude	AQS Site ID	Responsible Agency
Buffalo	Linwood Mining	11100 110th Ave.	Scott	DMR	41.46724	-90.68845	191630017	DNR
Cedar Rapids	Public Health	500 11th St. NW	Linn	CDR	41.97677	-91.68766	191130040	Linn Local Prog.
Clinton	Chancy Park	23rd & Camanche	Clinton	-	41.82328	-90.21198	190450019	DNR
Clinton	Rainbow Park	Roosevelt St.	Clinton	-	41.875	-90.17757	190450021	DNR
Coggon	Coggon Elementary School	408 E Linn St.	Linn	CDR	42.28056	-91.52694	191130033	Linn Local Prog.
Council Bluffs	Franklin School	3130 C Ave.	Pottawattamie	OMC	41.26417	-95.89612	191550009	DNR
Council Bluffs	Griffin Pipe	8th Avenue and 27th St	Pottawattamie	OMC	41.25425	-95.88725	191550011	DNR
Davenport	Jefferson School	10th St. & Vine St.	Scott	DMR	41.53001	-90.58761	191630015	DNR
Davenport	Hayes School	622 South Concord St	Scott	DMR	41.51208	-90.62404	191630020	DNR
Des Moines	Health Dept.	1907 Carpenter	Polk	DSM	41.60318	-93.6433	191530030	Polk Local Prog.
Des Moines	Public Works	5885 NE 14th	Polk	DSM	41.667032	-93.599221	191535885	Polk Local Prog.
Emmetsburg	Iowa Lakes College	Iowa Lakes Community College	Palo Alto	-	43.1237	-94.69352	191471002	DNR
Iowa City	Hoover School	2200 East Court	Johnson	IAC	41.65723	-91.50348	191032001	DNR
Keokuk	Fire Station	111S. 13th St.	Lee	-	40.40096	-91.39101	191110008	DNR
Mason City	Holcim Cement	17th St. & Washington St.	Cerro Gordo	-	43.16944	-93.20243	190330018	DNR
Muscatine	Greenwood Cemetery	Fletcher St. & Kimble St.	Muscatine	-	41.41943	-91.07098	191390016	DNR
Muscatine	Muscatine HS, East Campus Roof	1409 Wisconsin	Muscatine	-	41.40095	-91.06781	191390015	DNR
Muscatine	Muscatine HS, East Campus Trailer	1409 Wisconsin	Muscatine	-	41.40145	-91.06845	191390019	DNR
Muscatine	Musser Park	Oregon St. & Earl Ave.	Muscatine	-	41.4069	-91.0616	191390020	DNR
Pisgah	Forestry Office	206 Polk St.	Harrison	OMC	41.83226	-95.92819	190850007	DNR
Sheldahl	Southern Crossroads	15795 NW 58 th St	Polk	DSM	41.84943	-93.69762	191531579	Polk Local Prog.
Sioux City	Irving School	901 Floyd Blvd.	Woodbury	SXC	42.499844	-96.394755	191930021	DNR
Waterloo	Water Tower	Vine St. & Steely	Black Hawk	WTL	42.50154	-92.31602	190130009	DNR
Waverly	Waverly Airport	Waverly Airport	Bremer	WTL	42.74117	-92.51285	190170011	DNR
-	Lake Sugema	24430 Lacey Trl, Keosauqua	Van Buren	-	40.69508	-92.00632	191770006	DNR
-	Scott County Park	Scott County Park	Scott	DMR	41.69917	-90.52194	191630014	DNR
-	Viking Lake State Park	2780 Viking Lake Road	Montgomery	-	40.96911	-95.04495	191370002	DNR

Site Table Definitions:

City – the city closest to the monitor location.

Site – the name of the monitoring site.

Address – an intersection or street address close to the monitoring site.

County – the county where the monitoring site resides.

MSA – Metropolitan Statistical Area. Iowa’s Metropolitan Statistical Areas (MSAs) according to the U.S. Census Bureau:

U.S. Census Geographic area	Abbreviation
Omaha-Council Bluffs, NE-IA	OMC
Des Moines-West Des Moines, IA	DSM
Davenport-Moline-Rock Island, IA-IL	DMR
Cedar Rapids, IA	CDR
Waterloo-Cedar Falls, IA	WTL
Sioux City, IA-NE-SD	SXC
Iowa City, IA	IAC
Dubuque, IA	-
Ames, IA	-

Source for Counties: [US Census MSA Delineation](#)

Maximum ozone concentrations are typically measured 10-30 miles downwind of an MSA. The site intended to record the maximum ozone concentration resulting from a given MSA may be located outside the MSA boundaries. Sites intended to measure background levels of pollutants for an MSA may also be located upwind and outside of that particular MSA.

Latitude – the latitude of a monitoring site, given in decimal degrees using the WGS (World Geodetic System) 84 datum.

Longitude – the longitude of a monitoring site, given in decimal degrees using the WGS (World Geodetic System) 84 datum.

AQS Site ID – The identifier of a monitoring site used in the US EPA Air Quality System (AQS) database. It has the form XX-XXX-XXXX where the first two digits specify the state (19 for Iowa), the next set of three digits the county, and the last four digits the site.

Responsible Agency – The agency responsible for performing ambient air monitoring at a monitoring site. The Polk County Local Program operates sites in or near Polk County. The Linn County Local Program operates sites in or near Linn County. The Department of Natural Resources (DNR) contracts with the State Hygienic Laboratory at the University of Iowa (SHL) to operate monitoring sites not operated by the Polk or Linn County Local Programs.

Appendix D: 2022 Iowa Ambient Air Monitors

Site Name	PQAO	Pollutant	POC	Monitor Type	Design Value 20-22	High Design Value?	Sampling Method	Analysis	Operating Schedule	Primary Monitoring Objective	Spatial Scale	FRM/FEM	FRM/FEM Purpose
Buffalo, Linwood Mining	SHL	PM10	2	SLAMS			Low Volume FRM	Gravimetric	Daily	Source Oriented	Middle	Yes	NAAQS Compliance
Buffalo, Linwood Mining	SHL	PM10	3	SLAMS			Beta Attenuation	Met One BAM	Continuous	Source Oriented	Middle	Yes	QA NAAQS Compliance
Buffalo, Linwood Mining	SHL	PM10	5	SLAMS			Beta Attenuation	Met One BAM	Continuous	Source Oriented	Middle	Yes	Real-Time AQI Reporting
Cedar Rapids, Public Health	Linn	Ozone	1	SPM	60	Yes	UV Absorption		Continuous	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Cedar Rapids, Public Health	Linn	Ozone	2	SPM			UV Absorption		Continuous	Population Exposure	Neighborhood	Yes	QA Real-Time AQI Reporting*
Cedar Rapids, Public Health	Linn	PM10	1	SLAMS			Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Cedar Rapids, Public Health	Linn	PM10	2	SLAMS			Low Volume FRM	Gravimetric	1 in 6	Population Exposure	Neighborhood	Yes	QA NAAQS Compliance*
Cedar Rapids, Public Health	Linn	PM2.5	1	SLAMS	22/8.1	No	Low Volume FRM	Gravimetric	Daily	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Cedar Rapids, Public Health	Linn	PM2.5	2	SLAMS			Low Volume FRM	Gravimetric	1 in 6	Population Exposure	Neighborhood	Yes	QA NAAQS Compliance*
Cedar Rapids, Public Health	Linn	PM2.5	3	SPM			Light Scattering	T640	Continuous	Population Exposure	Neighborhood	Yes	Real Time AQI Reporting*
Cedar Rapids, Public Health	Linn	PM2.5	4	SPM			Light Scattering	T640	Continuous	Population Exposure	Neighborhood	Yes	QA Real-Time AQI Reporting
Cedar Rapids, Public Health	Linn	SO2	1	SPM			UV Fluorescent		Continuous	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Cedar Rapids, Public Health	Linn	Toxics	16	SPM			Cartridge	TO-11A	1 in 12	Population Exposure	Neighborhood	na	
Clinton, Chancy Park	SHL	PM2.5	1	SPM	22/na	No	Low Volume FRM	Gravimetric	1 in 3	Source Oriented	Middle	Yes	NAAQS Compliance

Site Name	PQAO	Pollutant	POC	Monitor Type	Design Value 20-22	High Design Value?	Sampling Method	Analysis	Operating Schedule	Primary Monitoring Objective	Spatial Scale	FRM/FEM	FRM/FEM Purpose
Clinton, Chancy Park	SHL	PM2.5	3	SPM			Light Scattering	T640	Continuous	Source Oriented	Middle	Yes	Real-Time AQI Reporting
Clinton, Chancy Park	SHL	PM2.5	4	SPM			Light Scattering	T640	Continuous	Source Oriented	Middle	Yes	QA Real-Time AQI Reporting
Clinton, Chancy Park	SHL	SO2	1	SPM			UV Fluorescent		Continuous	Source Oriented	Middle	Yes	NAAQS Compliance
Clinton, Chancy Park	SHL	Toxics	16	SPM			Cartridge	TO-11A	1 in 12	Population Exposure	Middle	na	
Clinton, Rainbow Park	SHL	Ozone	1	SLAMS	63	Yes	UV Absorption		Continuous	Population Exposure	Urban	Yes	NAAQS Compliance
Clinton, Rainbow Park	SHL	Ozone	2	SLAMS			UV Absorption		Continuous	Population Exposure	Urban	Yes	QA Real-Time AQI Reporting*
Clinton, Rainbow Park	SHL	PM2.5	1	SPM	20/7.8	No	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Coggon, Elementary School	Linn	Ozone	1	SLAMS	61	Yes	UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	NAAQS Compliance
Coggon, Elementary School	Linn	Ozone	2	SLAMS			UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	QA Real-Time AQI Reporting*
Council Bluffs, Franklin School	SHL	PM10	1	SPM			Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Council Bluffs, Franklin School	SHL	PM2.5	1	SPM	22/8.2	No	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Council Bluffs, Franklin School	SHL	PM2.5	2	SPM			Low Volume FRM	Gravimetric	1 in 6	Population Exposure	Neighborhood	Yes	QA NAAQS Compliance*
Council Bluffs, Griffin Pipe	SHL	Lead	1	SLAMS			High Volume FRM	ICP-MS	1 in 6	Source Oriented	Middle	Yes	NAAQS Compliance
Council Bluffs, Griffin Pipe	SHL	Lead	3	SLAMS			High Volume FRM	ICP-MS	1 in 6	Source Oriented	Middle	Yes	QA NAAQS Compliance*
Davenport, Hayes Sch.	SHL	PM2.5	1	SLAMS	22/8.4	No	Low Volume FRM	Gravimetric	Daily	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Davenport, Jefferson Sch.	SHL	CO	1	NCORE			Non-Dispersive Infrared		Continuous	Population Exposure	Neighborhood	Yes	NAAQS Compliance

Site Name	PQAO	Pollutant	POC	Monitor Type	Design Value 20-22	High Design Value?	Sampling Method	Analysis	Operating Schedule	Primary Monitoring Objective	Spatial Scale	FRM/FEM	FRM/FEM Purpose
Davenport, Jefferson Sch.	SHL	CSN Speciation	5	NCORE			CSN Sampler	CSN Protocol	1 in 3	Population Exposure	Neighborhood	No	
Davenport, Jefferson Sch.	SHL	NOy	2	NCORE			Chemiluminescence		Continuous	Population Exposure	Neighborhood	na	
Davenport, Jefferson Sch.	SHL	Ozone	1	NCORE	60	Yes	UV Absorption		Continuous	Population Exposure	Urban	Yes	NAAQS Compliance
Davenport, Jefferson Sch.	SHL	Ozone	2	NCORE			UV Absorption		Continuous	Population Exposure	Urban	Yes	QA Real-Time AQI Reporting*
Davenport, Jefferson Sch.	SHL	PM10	1	NCORE			Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Davenport, Jefferson Sch.	SHL	PM10	2	NCORE			Low Volume FRM	Gravimetric	1 in 6	Population Exposure	Neighborhood	Yes	QA NAAQS Compliance*
Davenport, Jefferson Sch.	SHL	PM2.5	1	NCORE	21/8.0	No	Low Volume FRM	Gravimetric	Daily	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Davenport, Jefferson Sch.	SHL	PM2.5	2	NCORE			Low Volume FRM	Gravimetric	1 in 6	Population Exposure	Neighborhood	Yes	QA NAAQS Compliance*
Davenport, Jefferson Sch.	SHL	PM2.5	3	NCORE			Light Scattering	T640	Continuous	Population Exposure	Neighborhood	Yes	Real-Time AQI Reporting*
Davenport, Jefferson Sch.	SHL	PM2.5	4	NCORE			Light Scattering	T640	Continuous	Population Exposure	Neighborhood	Yes	QA Real-Time AQI Reporting*
Davenport, Jefferson Sch.	SHL	SO2	1	NCORE			UV Fluorescent		Continuous	Population Exposure	Urban	Yes	NAAQS Compliance
Davenport, Jefferson Sch.	SHL	Toxics	16	SPM			Cartridge	TO-11A	1 in 12	Population Exposure	Neighborhood	na	
Des Moines, Health Dept.	Polk	NO2	1	SPM			Chemiluminescence		Continuous	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Des Moines, Health Dept.	Polk	Ozone	1	SLAMS	58	No	UV Absorption		Continuous	Population Exposure	Urban	Yes	NAAQS Compliance
Des Moines, Health Dept.	Polk	Ozone	2	SLAMS			UV Absorption		Continuous	Population Exposure	Urban	Yes	QA Real-Time AQI Reporting*
Des Moines, Health Dept.	Polk	PM10	1	SLAMS			Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Des Moines, Health Dept.	Polk	PM10	2	SLAMS			Low Volume FRM	Gravimetric	1 in 6	Population Exposure	Neighborhood	Yes	QA NAAQS Compliance*
Des Moines, Health Dept.	Polk	PM2.5	1	SLAMS	19/7.6	No	Low Volume FRM	Gravimetric	Daily	Population Exposure	Neighborhood	Yes	NAAQS Compliance

Site Name	PQAO	Pollutant	POC	Monitor Type	Design Value 20-22	High Design Value?	Sampling Method	Analysis	Operating Schedule	Primary Monitoring Objective	Spatial Scale	FRM/FEM	FRM/FEM Purpose
Des Moines, Health Dept.	Polk	PM2.5	2	SLAMS			Low Volume FRM	Gravimetric	1 in 6	Population Exposure	Neighborhood	Yes	QA NAAQS Compliance*
Des Moines, Health Dept.	Polk	PM2.5	3	SLAMS			Beta Attenuation	Met One BAM	Continuous	Population Exposure	Neighborhood	Yes	Real-Time AQI Reporting*
Des Moines, Health Dept.	Polk	PM2.5	4	SPM			Beta Attenuation	Met One BAM	Continuous	Population Exposure	Neighborhood	Yes	QA Real-Time AQI Reporting*
Des Moines, Health Dept.	Polk	Toxics	16	SPM			Cartridge	TO-11A	1 in 12	Population Exposure	Neighborhood	na	
Des Moines, Public Works	Polk	PM2.5	1	SPM			Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Des Moines, Public Works	Polk	PM2.5	2	SPM			Beta Attenuation	Met One BAM	Continuous	Population Exposure	Neighborhood	Yes	Real-Time AQI Reporting*
Emmetsburg, Iowa Lakes Coll.	SHL	Ozone	1	SLAMS	61	Yes	UV Absorption		Continuous	Regional Transport	Regional	Yes	NAAQS Compliance
Emmetsburg, Iowa Lakes Coll.	SHL	Ozone	2	SLAMS			UV Absorption		Continuous	Regional Transport	Regional	Yes	QA Real-Time AQI Reporting*
Emmetsburg, Iowa Lakes Coll.	SHL	PM2.5	1	SLAMS	19/7.0	No	Low Volume FRM	Gravimetric	1 in 3	General / Background	Regional	Yes	NAAQS Compliance
Emmetsburg, Iowa Lakes Coll.	SHL	PM2.5	3	SPM			Beta Attenuation	Met One BAM	Continuous	General / Background	Regional	No	
Emmetsburg, Iowa Lakes Coll.	SHL	PM2.5	4	SPM			Beta Attenuation	Met One BAM	Continuous	General / Background	Regional	No	
Iowa City, Hoover Sch.	SHL	PM2.5	1	SPM	21/7.8	No	Low Volume FRM	Gravimetric	Daily	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Iowa City, Hoover Sch.	SHL	PM2.5	3	SPM			Light Scattering	T640	Continuous	Population Exposure	Neighborhood	Yes	Real-Time AQI Reporting*
Iowa City, Hoover Sch.	SHL	PM2.5	4	SPM			Light Scattering	T640	Continuous	Population Exposure	Neighborhood	Yes	QA Real-Time AQI Reporting*
Keokuk, Fire Station	SHL	PM2.5	1	SPM	19/8.2	No	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Lake Sugema	SHL	IMPROVE Speciation	1	IMPROVE			IMPROVE Sampler	IMPROVE Protocol	1 in 3	General / Background	Regional	na	
Lake Sugema	SHL	NO2	1	SPM			Chemiluminescence		Continuous	General / Background	Regional	Yes	NAAQS Compliance
Lake Sugema	SHL	Ozone	1	SLAMS	56	No	UV Absorption		Continuous	Regional Transport	Regional	Yes	NAAQS Compliance
Lake Sugema	SHL	Ozone	2	SLAMS			UV Absorption		Continuous	Regional Transport	Regional	Yes	QA Real-Time AQI Reporting*

Site Name	PQAO	Pollutant	POC	Monitor Type	Design Value 20-22	High Design Value?	Sampling Method	Analysis	Operating Schedule	Primary Monitoring Objective	Spatial Scale	FRM/FEM	FRM/FEM Purpose
Lake Sugema	SHL	PM10	1	SPM			Low Volume FRM	Gravimetric	1 in 3	General / Background	Regional	Yes	NAAQS Compliance
Lake Sugema	SHL	PM2.5	1	SLAMS	18/7.1	No	Low Volume FRM	Gravimetric	1 in 3	Regional Transport	Regional	Yes	NAAQS Compliance
Lake Sugema	SHL	PM2.5	3	SPM			Beta Attenuation	Met One BAM	Continuous	Regional Transport	Regional	No	
Lake Sugema	SHL	PM2.5	4	SPM			Beta Attenuation	Met One BAM	Continuous	Regional Transport	Regional	No	
Lake Sugema	SHL	SO2	1	SPM			UV Fluorescent		Continuous	General / Background	Regional	Yes	NAAQS Compliance
Mason City, Holcim Cement	SHL	PM10	1	SLAMS			Low Volume FRM	Gravimetric	1 in 3	Source Oriented	Middle	Yes	NAAQS Compliance
Mason City, Holcim Cement	SHL	PM10	2	SLAMS			Low Volume FRM	Gravimetric	1 in 6	Source Oriented	Middle	Yes	QA NAAQS Compliance*
Muscatine HS, East Campus Trailer	SHL	SO2	1	SPM			UV Fluorescent		Continuous	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Muscatine HS, East Campus Roof	SHL	PM10	1	SPM			Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Muscatine HS, East Campus Roof	SHL	PM2.5	1	SLAMS	20/8.0	No	Low Volume FRM	Gravimetric	Daily	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Muscatine HS, East Campus Roof	SHL	PM2.5	2	SLAMS			Low Volume FRM	Gravimetric	1 in 6	Population Exposure	Neighborhood	Yes	QA NAAQS Compliance*
Muscatine HS, East Campus Trailer	SHL	PM2.5	3	SPM			Beta Attenuation	Met One BAM	Continuous	Population Exposure	Neighborhood	No	
Muscatine HS, East Campus Trailer	SHL	PM2.5	4	SPM			Beta Attenuation	Met One BAM	Continuous	Population Exposure	Neighborhood	No	
Muscatine, Greenwood Cemetery	SHL	PM2.5	1	SPM	18/7.7	No	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Muscatine, Greenwood Cemetery	SHL	SO2	1	SPM			UV Fluorescent		Continuous	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Muscatine, Musser Park	SHL	PM2.5	1	SPM	20/na	No	Low Volume FRM	Gravimetric	1 in 3	Source Oriented	Middle	Yes	NAAQS Compliance
Muscatine, Musser Park	SHL	SO2	1	SLAMS			UV Fluorescent		Continuous	Source Oriented	Middle	Yes	NAAQS Compliance

Site Name	PQAO	Pollutant	POC	Monitor Type	Design Value 20-22	High Design Value?	Sampling Method	Analysis	Operating Schedule	Primary Monitoring Objective	Spatial Scale	FRM/FEM	FRM/FEM Purpose
Muscatine, Musser Park	SHL	Toxics	16	SPM			Cartridge	TO-11A	1 in 12	Source Oriented	Middle	na	
Pisgah, Forestry Office	SHL	Ozone	1	SLAMS	61	Yes	UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	NAAQS Compliance
Pisgah, Forestry Office	SHL	Ozone	2	SLAMS			UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	QA Real-Time AQI Reporting*
Scott County Park	SHL	Ozone	1	SLAMS	60	Yes	UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	NAAQS Compliance
Scott County Park	SHL	Ozone	2	SLAMS			UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	QA Real-Time AQI Reporting*
Sheldahl, Southern Crossroads	Polk	Ozone	1	SLAMS	57	No	UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	NAAQS Compliance
Sheldahl, Southern Crossroads	Polk	Ozone	2	SLAMS			UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	QA Real-Time AQI Reporting*
Sioux City, Irving School	SHL	PM2.5	1	SPM	19/7.9	No	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Viking Lake State Park	SHL	IMPROVE Speciation	1	IMPROVE			IMPROVE Sampler	IMPROVE Protocol	1 in 3	General / Background	Regional	na	
Viking Lake State Park	SHL	Ozone	1	SLAMS	57	No	UV Absorption		Continuous	Regional Transport	Regional	Yes	NAAQS Compliance
Viking Lake State Park	SHL	Ozone	2	SLAMS			UV Absorption		Continuous	Regional Transport	Regional	Yes	QA Real-Time AQI Reporting*
Viking Lake State Park	SHL	PM2.5	1	SLAMS	17/6.7	No	Low Volume FRM	Gravimetric	1 in 3	Regional Transport	Regional	Yes	NAAQS Compliance
Viking Lake State Park	SHL	PM2.5	3	SPM			Beta Attenuation	Met One BAM	Continuous	Regional Transport	Regional	No	
Viking Lake State Park	SHL	PM2.5	4	SPM			Beta Attenuation	Met One BAM	Continuous	Regional Transport	Regional	No	
Waterloo, Water Tower	SHL	PM2.5	1	SLAMS	22/7.9	No	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance
Waterloo, Water Tower	SHL	PM2.5	3	SPM			Beta Attenuation	Met One BAM	Continuous	Population Exposure	Neighborhood	No	
Waterloo, Water Tower	SHL	PM2.5	4	SPM			Beta Attenuation	Met One BAM	Continuous	Population Exposure	Neighborhood	No	
Waverly Airport	SHL	Ozone	1	SLAMS	60	Yes	UV Absorption		Continuous	Population Exposure	Urban	Yes	NAAQS Compliance
Waverly Airport	SHL	Ozone	2	SLAMS			UV Absorption		Continuous	Population Exposure	Urban	Yes	QA Real-Time AQI Reporting*

Monitor Table Definitions:

Site Name – a combination of the city and site name from the previous table

Pollutant – indicates the pollutant, or set of pollutants, measured by each monitor

- CO – carbon monoxide.
- CSN Speciation – a speciation monitor and suite of lab analysis procedures developed by the Chemical Speciation Network (CSN) program to identify and quantify the chemical components of PM_{2.5}.
- IMPROVE Speciation – a speciation monitor and suite of lab analysis procedures developed by the Interagency Monitoring of PROtected Visual Environments (IMPROVE) program to identify and quantify the chemical components of PM_{2.5} in order to establish changes in visibility.
- Lead—lead (Pb).
- NO₂ – nitrogen dioxide.
- NO_y – the sum of all reactive oxides of nitrogen: NO, NO₂, NO₃, N₂O₅, HNO₂, HNO₃, PAN, organic nitrates and aerosol nitrates.
- Ozone – an unstable molecule consisting of three oxygen atoms.
- PM₁₀ – particles with a diameter of 10 micrometers or less.
- PM_{2.5} – particles with a diameter of 2.5 micrometers or less, also known as “fine particles”.
- SO₂ – sulfur dioxide.
- Toxics – monitoring for a pollutant identified on EPA’s Urban Air Toxics list.

POC – “Parameter Occurrence Code” an integer in the AQS database that labels monitors at a monitoring site. If there are multiple monitors for a given pollutant at a monitoring site, each monitor will have its own POC.

Monitor Type – This column indicates how the monitor is classified in the AQS database.

- IMPROVE – a speciation monitor developed by the IMPROVE program to identify and quantify the chemical components of PM_{2.5}. An IMPROVE monitor is a type of special purpose monitor (SPM) – see below.
- NCore – monitors operated at a site that has been accepted into EPA’s national network of long term multi-pollutant sites.
- SLAMS – State and Local Air Monitoring Stations. SLAMS make up the ambient air quality monitoring sites that are primarily needed for NAAQS comparisons, but may serve other data purposes. SLAMS exclude special purpose monitor (SPM) stations and include NCore, and all other State or locally operated stations that have not been designated as SPM stations.
- SPM – means a monitor that is designated as a special purpose monitor in the monitoring network plan and in EPA’s AQS database. SPM monitors do not count when showing compliance with minimum SLAMS requirements for monitor numbers and siting, unless a SPM designation is required for documenting a NAAQS exclusion for a poorly performing FEM PM_{2.5} monitor.

Design Value – A design value is a number computed from monitoring data (see 40 CFR Part 50, Appendix N) that is used for comparisons to the National Ambient Air Quality Standards (NAAQS). For PM_{2.5} and ozone, the monitoring requirements depend on these design values. For PM_{2.5}, there are

two design values—a 24-hour design value (in $\mu\text{g}/\text{m}^3$) and an annual design value (also in $\mu\text{g}/\text{m}^3$). For $\text{PM}_{2.5}$ monitors in the table, the 24-hour design value is listed first and an annual design value is listed second, i.e. 27/10.3. For ozone, there is a single design value; the 8-hour design value (in ppb) is indicated in the table.

High Design Value? – A “Yes” in this column indicates that the design value is within 85% of the NAAQS. For $\text{PM}_{2.5}$, 24-hour design values of $30 \mu\text{g}/\text{m}^3$ or greater are considered greater than or equal to 85% of the 24-hour NAAQS ($35 \mu\text{g}/\text{m}^3$) and values of $10.2 \mu\text{g}/\text{m}^3$ or greater are considered greater than or equal to the 85% of the annual NAAQS ($12.0 \mu\text{g}/\text{m}^3$). For ozone, 8-hour design values of 60 ppb or greater are considered greater than or equal to 85% of the 8-hour NAAQS (70 ppb).

Sampling Method – Indicates how the sample is collected. This column also shows how the sample is analyzed, if it is analyzed on site at the time of collection.

- Beta Attenuation—a type of continuous $\text{PM}_{2.5}$ monitor that reports data in real time. Continuous $\text{PM}_{2.5}$ monitors typically have three components: a size selective inlet (cyclone) that knocks out all but the fine particles, a conditioning system that rapidly dries the fine particles, and a mass measurement system that determines the mass of the conditioned sample. One type of continuous $\text{PM}_{2.5}$ monitor currently used in the Iowa Network is the BAM (BAM=Beta Attenuation Monitor). This monitor conditions particles using an inlet heater to reduce particle-bound water. Mass measurements are made by measuring the attenuation of beta particles caused by fine particles collected on a sampling tape during the sampling period.
- Cartridge – A 2,4-Dinitrophenylhydrazine (DNPH) cartridge is used to collect toxics that contain a carbonyl group.
- Chemiluminescence – When a nitric oxide (NO) molecule collides with an ozone molecule, a nitrogen dioxide (NO_2) molecule and an oxygen (O_2) molecule result. The NO_2 molecule is in an excited state, and subsequently emits infrared light that can be measured by a photomultiplier tube.
- High Volume FRM – a sampler that utilizes a flow of ~ 80 cubic meters per hour or about 80 times that of a low volume FRM.
- IMPROVE Sampler – See IMPROVE in the “Pollutant” section above.
- Light Scattering – a type of continuous PM sampler that utilizes scattered light to determine the number, diameter and concentration of particles in ambient air. These instruments typically condition the sample by lowering the relative humidity of the air stream (via a heater or Nafion dryer) to eliminate interferences due to particle bound water.
- Low Volume FRM – a sampler that uses a flow of 16.67 liters per minute, which has been designated as a Federal Reference Method.
- Non-Dispersive Infrared – Carbon Monoxide absorbs infrared radiation; this property is the basis of the analytical method used by continuous CO monitors to quantify CO concentrations.
- CSN Sampler – a speciation monitor to identify and quantify the chemical components of $\text{PM}_{2.5}$ via CSN protocol.
- UV Absorption – Ozone absorbs ultraviolet light; this property is the basis of the analytical method used by continuous ozone monitors to quantify ozone concentrations.

- UV Fluorescent – When excited by ultraviolet light, SO₂ molecules emit light at a lower frequency that may be detected by a photomultiplier tube. This property is the basis for the analytical method used for continuous SO₂ gas analyzers.

Analysis – indicates the method of analysis that is done either in situ or in a lab environment.

- Gravimetric – A filter is weighed before and after collecting a particulate sample.
- ICP-MS – Inductively Coupled Plasma Mass Spectrometry is a highly sensitive analytical technique capable of determining a range of metals. The metal sample is atomized and ionized by argon plasma, and the ions are separated and quantified via a mass spectrometer.
- IMPROVE Protocol – This protocol uses a suite of analytical procedures (X-Ray Fluorescence, Ion Chromatography, and Thermal Optical Reflectance) to identify and quantify the components of PM_{2.5}. See [IMPROVE](#) for further details.
- CSN Protocol – refers to EPA’s chemical speciation network protocol. This protocol utilizes X-Ray Fluorescence, Ion Chromatography, and Thermal Optical Reflectance to identify and quantify the components of PM_{2.5}.
- Met One BAM—See Beta Attenuation above. This category includes Met One models 1020 and 1022. The 1020 measurement unit resides in an air-conditioned shelter, while the 1022 measurement unit is outdoors. The 1022 reduces the chances of condensation in the inlet line of the sampler in humid weather.
- TO-11A – an EPA protocol in which carbonyl cartridge extracts are analyzed using High Performance Liquid Chromatography and an ultraviolet detector.
- T640 – A Teledyne T640 analyzer that uses scattered light to measure PM_{2.5}.

Operating Schedule – Continuous monitors run constantly and measure hourly average concentrations in real time. Manual samplers, such as PM filter samplers or toxics samplers, collect a single 24-hour sample from midnight to midnight on a particular day, which is quantified later in an analytical laboratory. A fractional (e.g. 1/2, 1/3, 1/6, and 1/12) schedule for a manual samplers refers to collecting a sample every second, third, sixth, and twelfth day, respectively. Ozone monitors in Iowa (except at the NCore site) are operated only during ozone season (March to October) when higher temperatures favor ozone formation. Cartridges for toxic carbonyl compounds are normally collected every twelfth day, but the schedule is accelerated to 1/6 days during ozone season.

Primary Monitoring Objective – the primary reason a monitor is operated at a particular location.

- General Background – The objective is to establish the background levels of a pollutant.
- Max. Ozone Conc. – The objective is to record the maximum ozone concentration. Because ozone is a secondary pollutant, ozone concentrations are typically highest 10-30 miles downwind of an urban area.
- Population Exposure – The objective is to monitor the exposure of individuals in the area represented by the monitor.
- Regional Transport – The objective is to assess the extent to which pollutants are transported between two regions that are separated by tens to hundreds of kilometers.
- Source Oriented – The objective is to determine the impact of a nearby source.

Spatial Scale – The scale of representativeness is described in terms of the physical dimensions of the air parcel nearest to a monitoring site throughout which actual pollutant concentrations are reasonably similar. Monitors are classified according to the largest applicable scale below:

- Microscale - defines the concentrations in air volumes associated with area dimensions ranging from several meters up to about 100 meters.
- Middle scale - defines the concentration typical of areas up to several city blocks in size with dimensions ranging from about 100 meters to 0.5 kilometer.
- Neighborhood scale - defines concentrations within some extended area of the city that has relatively uniform land use with dimensions in the 0.5 to 4.0 kilometers range. The neighborhood and urban scales listed below have the potential to overlap in applications that concern secondarily formed or homogeneously distributed air pollutants.
- Urban scale - defines concentrations within an area of city-like dimensions, on the order of 4 to 50 kilometers. Within a city, the geographic placement of sources may result in there being no single site that can be said to represent air quality on an urban scale.
- Regional scale – usually defines a rural area of reasonably homogeneous geography without large sources, and extends from tens to hundreds of kilometers.

FRM/FEM – “Federal Reference Method/Federal Equivalent Method” EPA specifies that only these types of monitors or monitoring methods may be used to establish attainment with the NAAQS. The first method that EPA declares to have sufficient accuracy and repeatability for ambient measurements is the reference method. Once the reference method is defined, other methods or equipment may be used for NAAQS comparisons, provided the candidate method passes tests that demonstrate comparability to the reference method. A criteria pollutant monitor that is not a FRM/FEM may not be used for NAAQS comparisons, but may still be useful for other purposes, such as real time reporting.

EPA has designated the Met One BAM as a Federal Equivalent Method (FEM) for PM_{2.5} when configured and operated as prescribed in the federal equivalence designation. Iowa operates several Met One BAM analyzers, but most are not configured in accordance with the designation, and the data cannot be compared with the NAAQS.

FRM/FEM Purpose – When more than one FRM/FEM is operated at a monitoring site at the same time (i.e. multiple POCs for the same pollutant), there is the potential for ambiguity in the attainment status at a monitoring site. To avoid this ambiguity, we declare one of the monitors to be the NAAQS compliance (primary) monitor at the monitoring site and indicate the purpose for the other monitors at the site.

- NAAQS Compliance – denotes a monitor that is the primary monitor used to establish attainment with the NAAQS.
- QA NAAQS Compliance – denotes a monitor that is used to satisfy a federal requirement to provide quality assurance data for the primary NAAQS monitor. Addition of an asterisk, i.e. QA NAAQS Compliance* means that data from this monitor may be substituted for the primary monitor data when the primary monitor data is missing.^{47, 48}

⁴⁷ For substitution rules for PM_{2.5}, Lead, and PM₁₀ see [EPA POC Technical Note](#)

⁴⁸ For AQS Guidelines for Reporting Collocated PM_{2.5} and Lead Data see [EPA Collocated Guidelines](#)

- Real-time AQI Reporting – Denotes a monitor used for real-time reporting. Addition of an asterisk, i.e. Real-time AQI Reporting* means that data from this monitor may be substituted for the primary monitor data when the primary monitor data is missing.
- QA Real-Time AQI Reporting – Denotes a monitor that is used to provide real-time QA of a continuous monitor used for real-time reporting. Addition of an asterisk, i.e. QA Real-time AQI Reporting* means that data from this monitor may be substituted for the primary monitor data when the primary monitor data is missing.

Appendix E: Population-Based Minimum Monitoring Requirements

Ozone

40 CFR Part 58 Appendix D, Table D-2 specifies the minimum number of SLAMS (State and Local Air Monitoring Stations) ozone monitors required based on population and the most recent three years of monitoring data (design value).

TABLE D-2 OF APPENDIX D TO PART 58—SLAMS MINIMUM OZONE MONITORING REQUIREMENTS

MSA population^{1 2}	Most recent 3-year design value concentrations \geq85% of any O₃ NAAQS³	Most recent 3-year design value concentrations $<$85% of any O₃ NAAQS^{3 4}
>10 million	4	2
4-10 million	3	1
350,000-<4 million	2	1
50,000-<350,000 ⁵	1	0

¹Minimum monitoring requirements apply to the Metropolitan statistical area (MSA).

²Population based on latest available census figures.

³The ozone (O₃) National Ambient Air Quality Standards (NAAQS) levels and forms are defined in 40 CFR part 50.

⁴These minimum monitoring requirements apply in the absence of a design value.

⁵Metropolitan statistical areas (MSA) must contain an urbanized area of 50,000 or more population.

PM_{2.5}

40 CFR Part 58 Appendix D, Table D-5 specifies the minimum number of SLAMS PM_{2.5} monitors required based on population and 3-year design values.

TABLE D-5 OF APPENDIX D TO PART 58—PM_{2.5} MINIMUM MONITORING REQUIREMENTS

MSA population^{1 2}	Most recent 3-year design value \geq85% of any PM_{2.5} NAAQS³	Most recent 3-year design value $<$85% of any PM_{2.5} NAAQS^{3 4}
>1,000,000	3	2
500,000-1,000,000	2	1
50,000-<500,000 ⁵	1	0

¹Minimum monitoring requirements apply to the Metropolitan statistical area (MSA).

²Population based on latest available census figures.

³The PM_{2.5} National Ambient Air Quality Standards (NAAQS) levels and forms are defined in 40 CFR part 50.

⁴These minimum monitoring requirements apply in the absence of a design value.

⁵Metropolitan statistical areas (MSA) must contain an urbanized area of 50,000 or more population.

PM₁₀

40 CFR Part 58 Appendix D, Table D-4 lists the minimum requirements for the number of PM₁₀ stations per MSA based on population and measured levels:

TABLE D-4 OF APPENDIX D TO PART 58—PM₁₀ MINIMUM MONITORING REQUIREMENTS (APPROXIMATE NUMBER OF STATIONS PER MSA)¹

Population category	High concentration ²	Medium concentration ³	Low concentration ^{4 5}
>1,000,000	6-10	4-8	2-4
500,000-1,000,000	4-8	2-4	1-2
250,000-500,000	3-4	1-2	0-1
100,000-250,000	1-2	0-1	0

¹Selection of urban areas and actual numbers of stations per area will be jointly determined by EPA and the State agency.

²High concentration areas are those for which ambient PM₁₀ data show ambient concentrations exceeding the PM₁₀ NAAQS by 20 percent or more.

³Medium concentration areas are those for which ambient PM₁₀ data show ambient concentrations exceeding 80 percent of the PM₁₀ NAAQS.

⁴Low concentration areas are those for which ambient PM₁₀ data show ambient concentrations less than 80 percent of the PM₁₀ NAAQS.

⁵These minimum monitoring requirements apply in the absence of a design value.

Nitrogen Dioxide

40 CFR Part 58 Appendix D, section 4.3.2 and 4.3.3 contain the minimum requirement for population-based NO₂ Monitoring:

...

4.3.2 Requirement for Near-road NO₂ Monitors

(a) Within the NO₂ network, there must be one microscale near-road NO₂ monitoring station in each CBSA with a population of 1,000,000 or more persons to monitor a location of expected maximum hourly concentrations sited near a major road with high AADT counts as specified in paragraph 4.3.2(a)(1) of this appendix. An additional near-road NO₂ monitoring station is required for any CBSA with a population of 2,500,000 persons or more, or in any CBSA with a population of 1,000,000 or more persons that has one or more roadway segments with 250,000 or greater AADT counts to monitor a second location of expected maximum hourly concentrations. CBSA populations shall be based on the latest available census figures.

...

4.3.3 Requirement for Area-wide NO₂ Monitoring

(a) Within the NO₂ network, there must be one monitoring station in each CBSA with a population of 1,000,000 or more persons to monitor a location of expected highest NO₂ concentrations representing the neighborhood or larger spatial scales. PAMS sites collecting NO₂ data that are situated in an area of expected high NO₂ concentrations at the neighborhood or larger spatial scale may be used to satisfy this minimum monitoring requirement when the NO₂ monitor is operated year round. Emission inventories and meteorological analysis should be used to identify the appropriate locations within a CBSA for locating required area-wide NO₂ monitoring stations. CBSA populations shall be based on the latest available census figures.


Appendix F: Census Bureau 2022 Estimates for Iowa MSAs

US Census Geographic Area	Counties in MSA	Population
Omaha-Council Bluffs, NE-IA	IA: Harrison, Mills, Pottawattamie NE: Cass, Douglas, Sarpy, Saunders, Washington	976,671
Des Moines-West Des Moines, IA	Dallas, Guthrie, Jasper, Madison, Polk, Warren	729,053
Davenport-Moline-Rock Island, IA-IL	IA: Scott IL Henry, Mercer, Rock Island	379,374
Cedar Rapids, IA	Benton, Jones, Linn	275,592
Iowa City, IA	Johnson, Washington	178,991
Waterloo-Cedar Falls, IA	Black Hawk, Bremer, Grundy	167,889
Sioux City, IA-NE-SD	IA: Woodbury NE: Dakota, Dixon SD: Union	149,240
Ames, IA	Boone, Story	126,282
Dubuque, IA	Dubuque	98,677

Source for Counties: [US Census MSA Delineation](#)

Source for July 1, 2022 Population Estimates: [US Census Population Estimates](#)


Appendix G: 2022 Design Value Map for Ozone

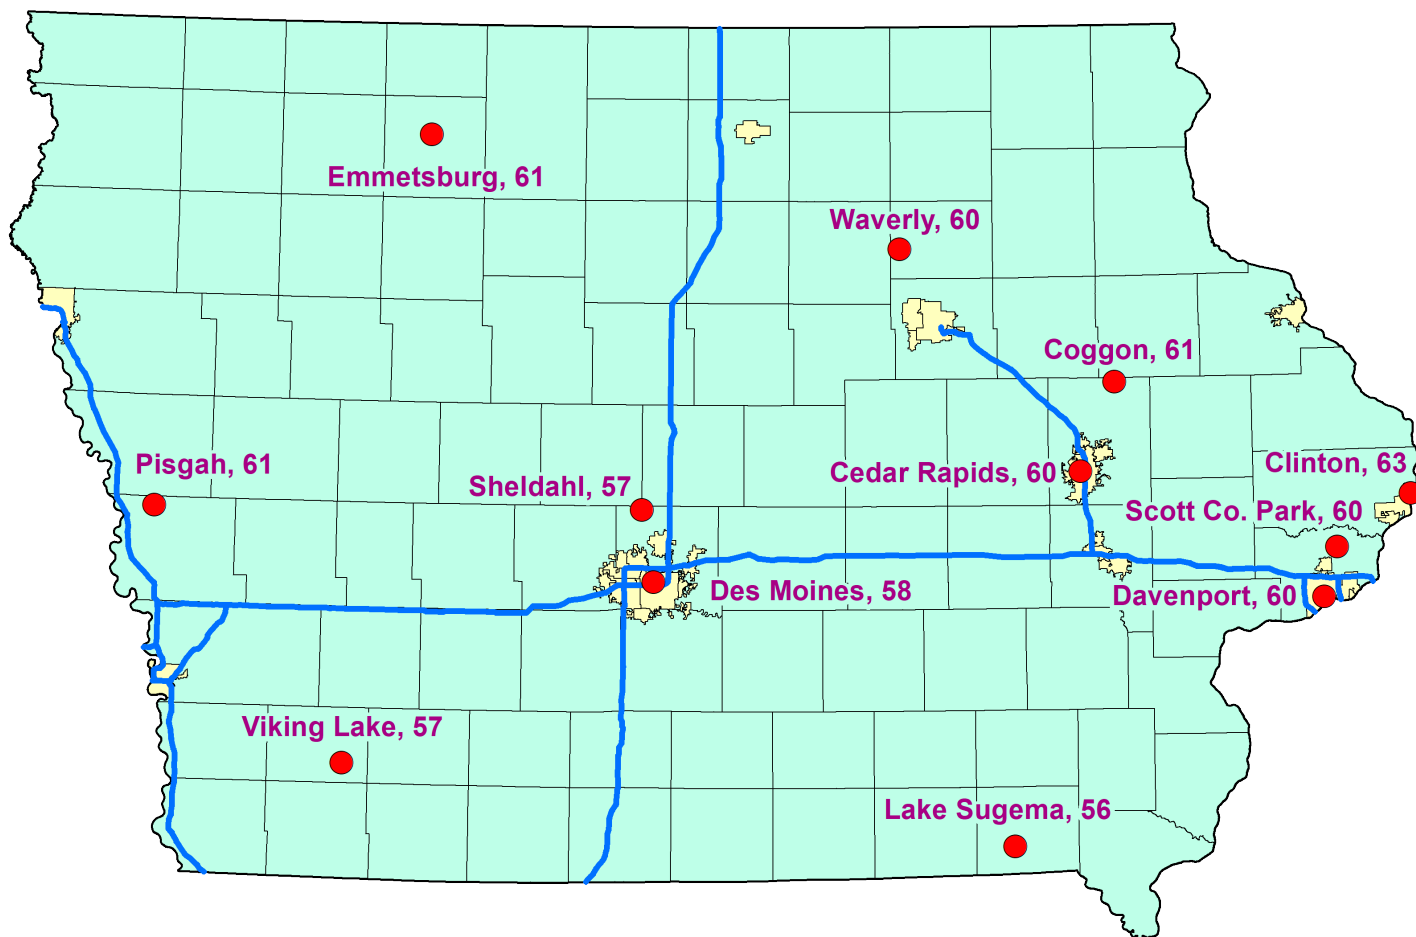


2020-2022 Ozone Design Values (ppb) Source: EPA Design Value Report (AMP 480) 4/3/23.
(The National Ambient Air Quality 8 hour Standard for Ozone is 70 ppb.)


Appendix H: Maps of SLAMS Monitoring Sites in MSAs on the State Border

Iowa includes portions of three MSAs that it shares with other states: Davenport-Moline-Rock Island, IA-IL; Omaha-Council Bluffs, NE-IA; and Sioux City, NE-IA-SD. To estimate the SLAMS sites operating at the time of this review, Air Quality System (AQS) reports (AMP390 and AMP450) and Network Plans from adjacent states were examined. The following maps show the locations of SLAMS monitoring sites for ozone, PM_{2.5}, SO₂, and PM₁₀ in these MSA's.

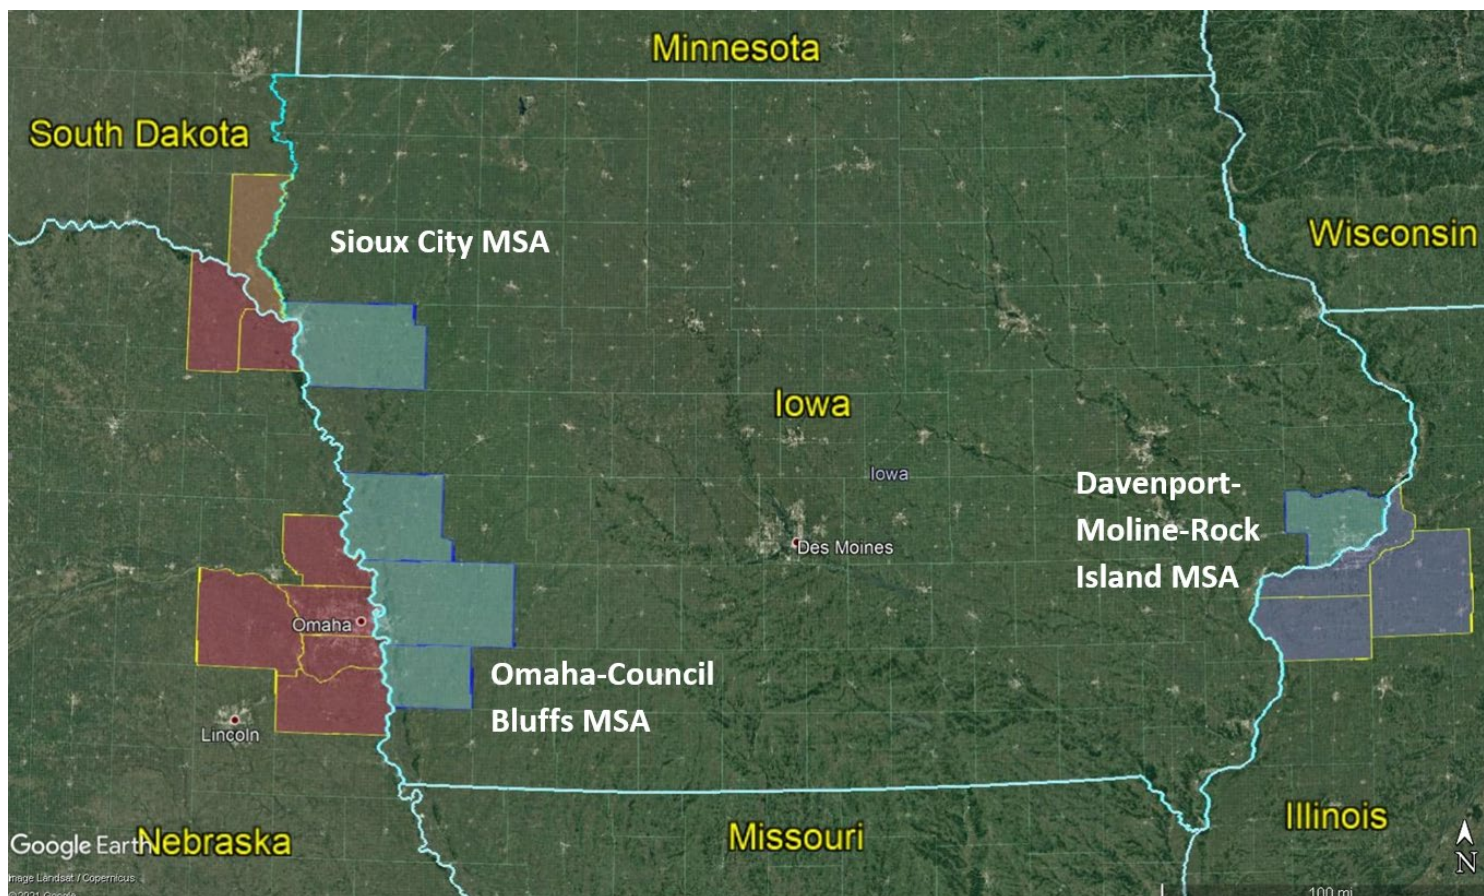


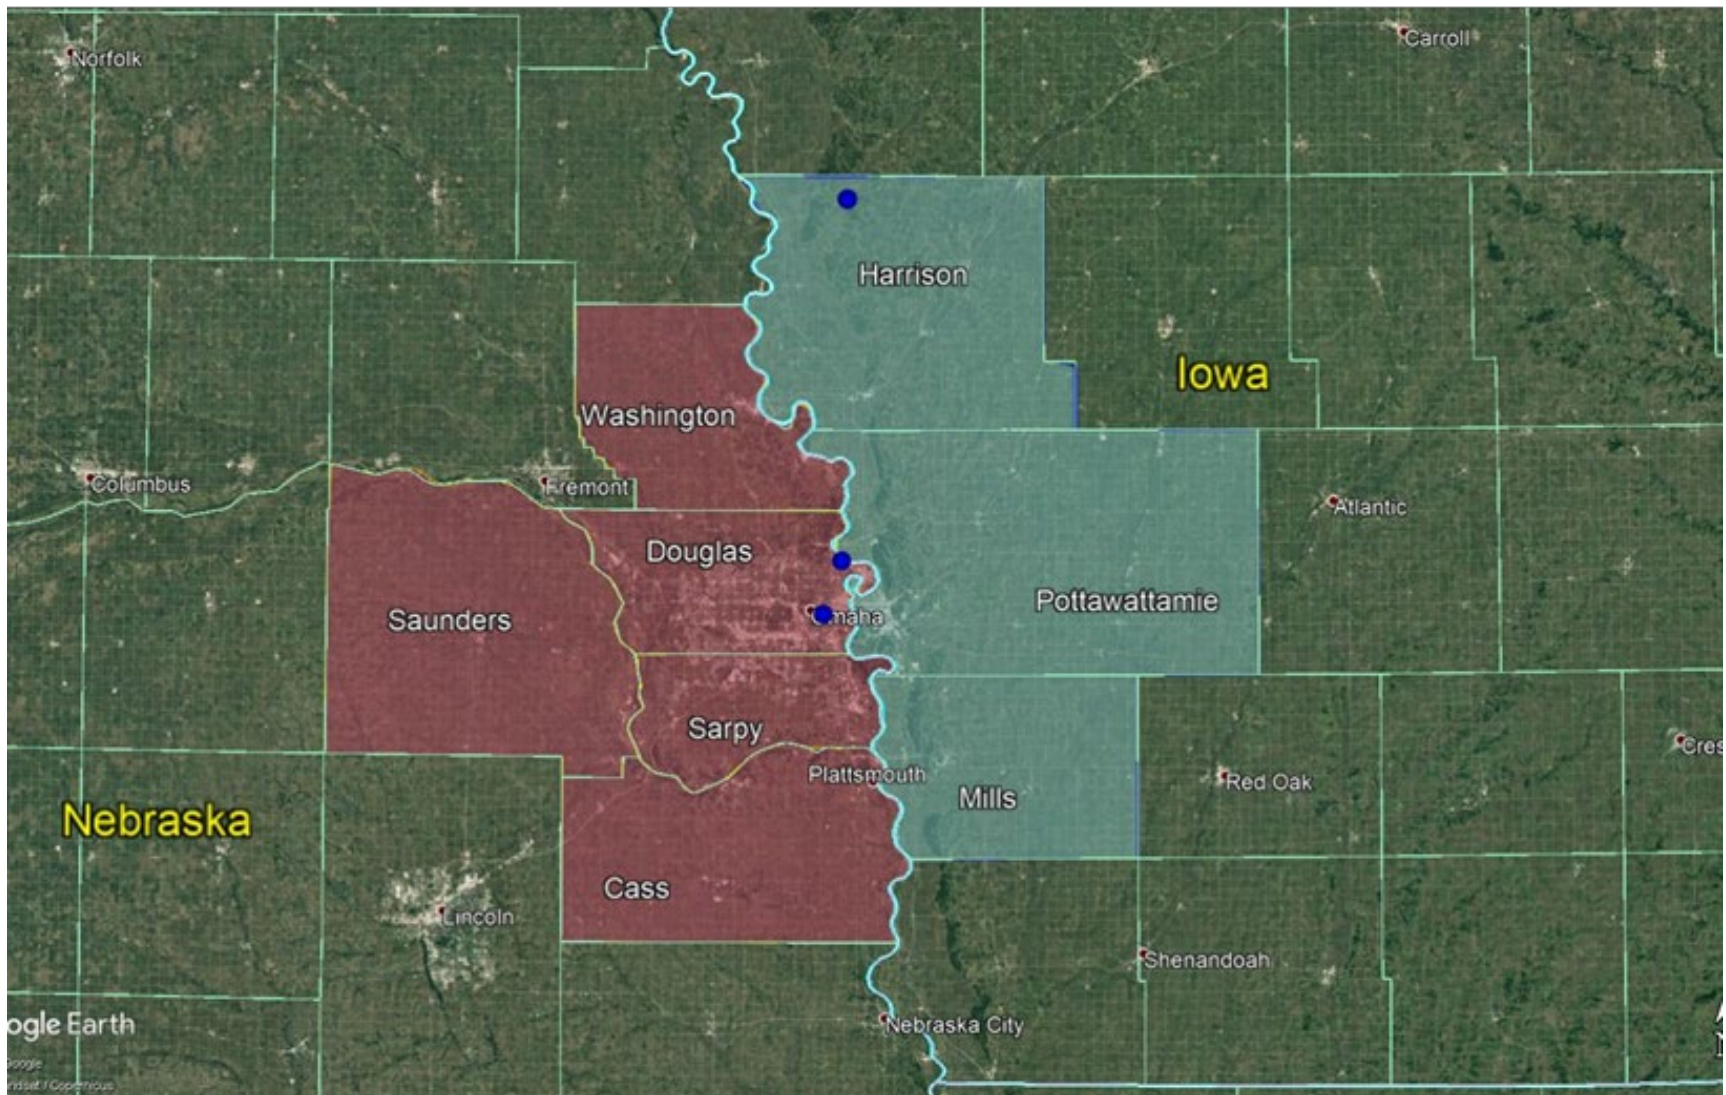


Omaha-Council Bluffs, NE-IA Ozone SLAMS Monitoring Sites

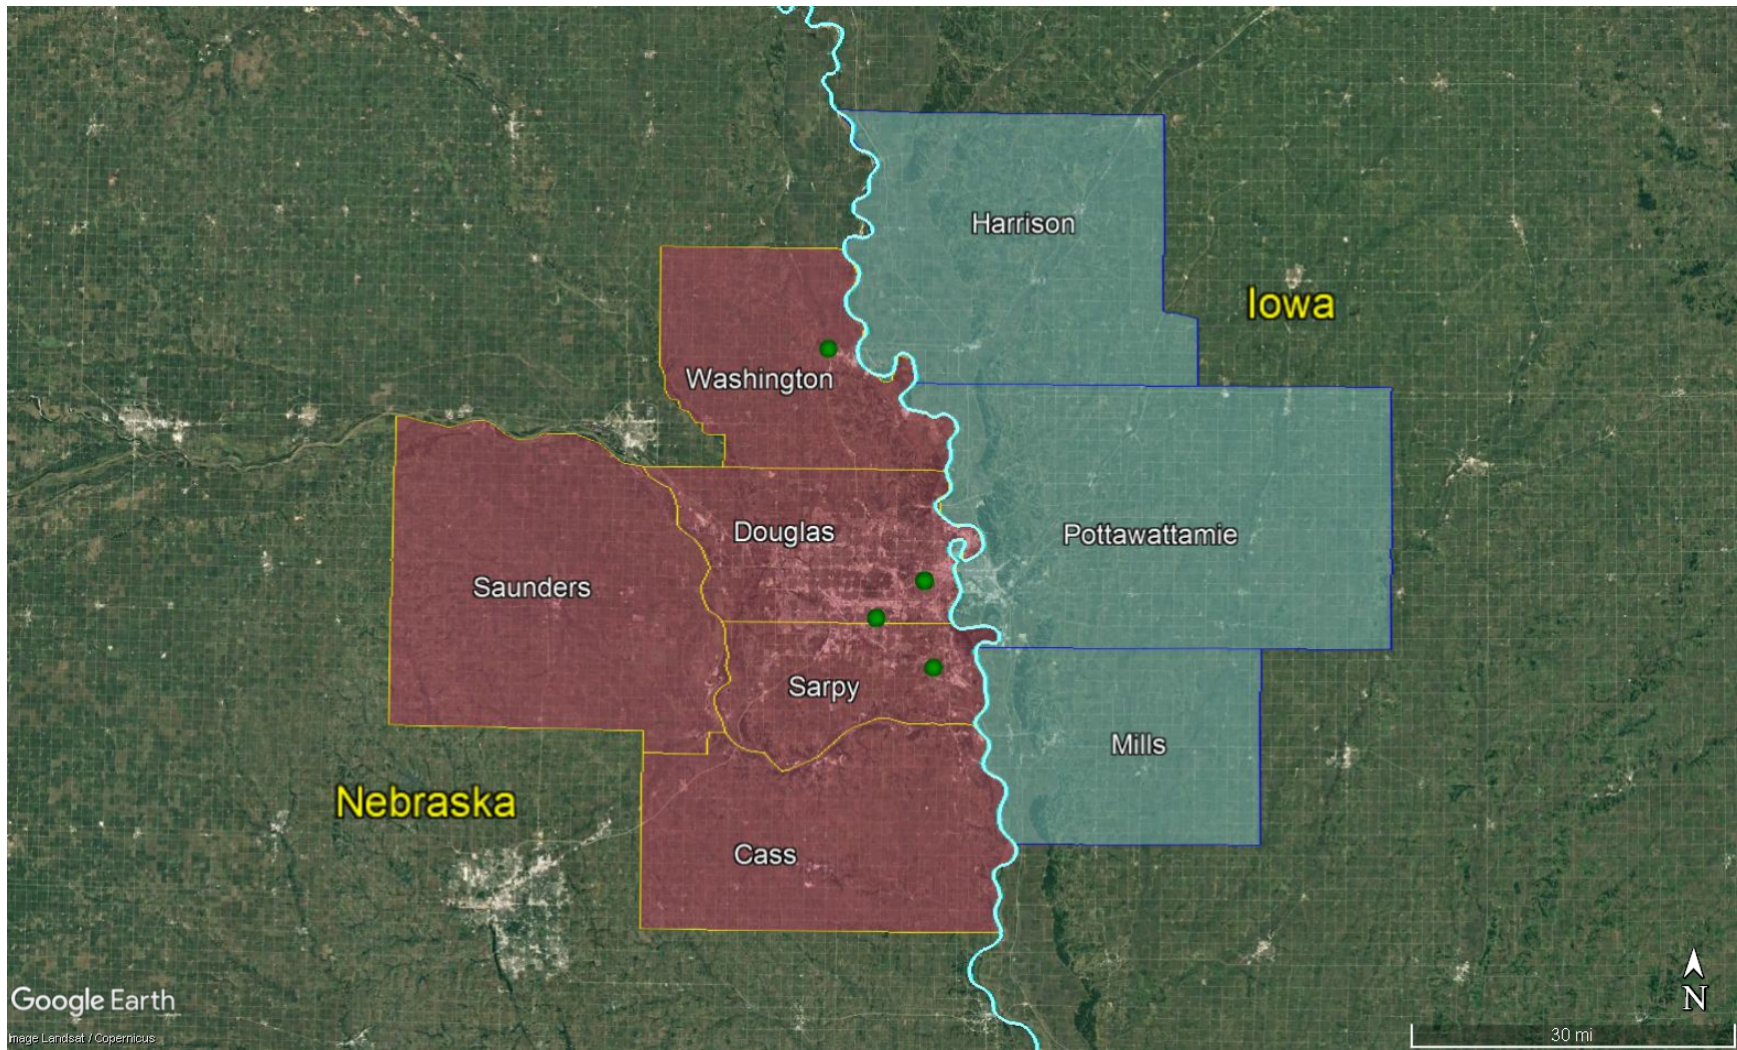


Omaha-Council Bluffs, NE-IA PM_{2.5} SLAMS Monitoring Sites

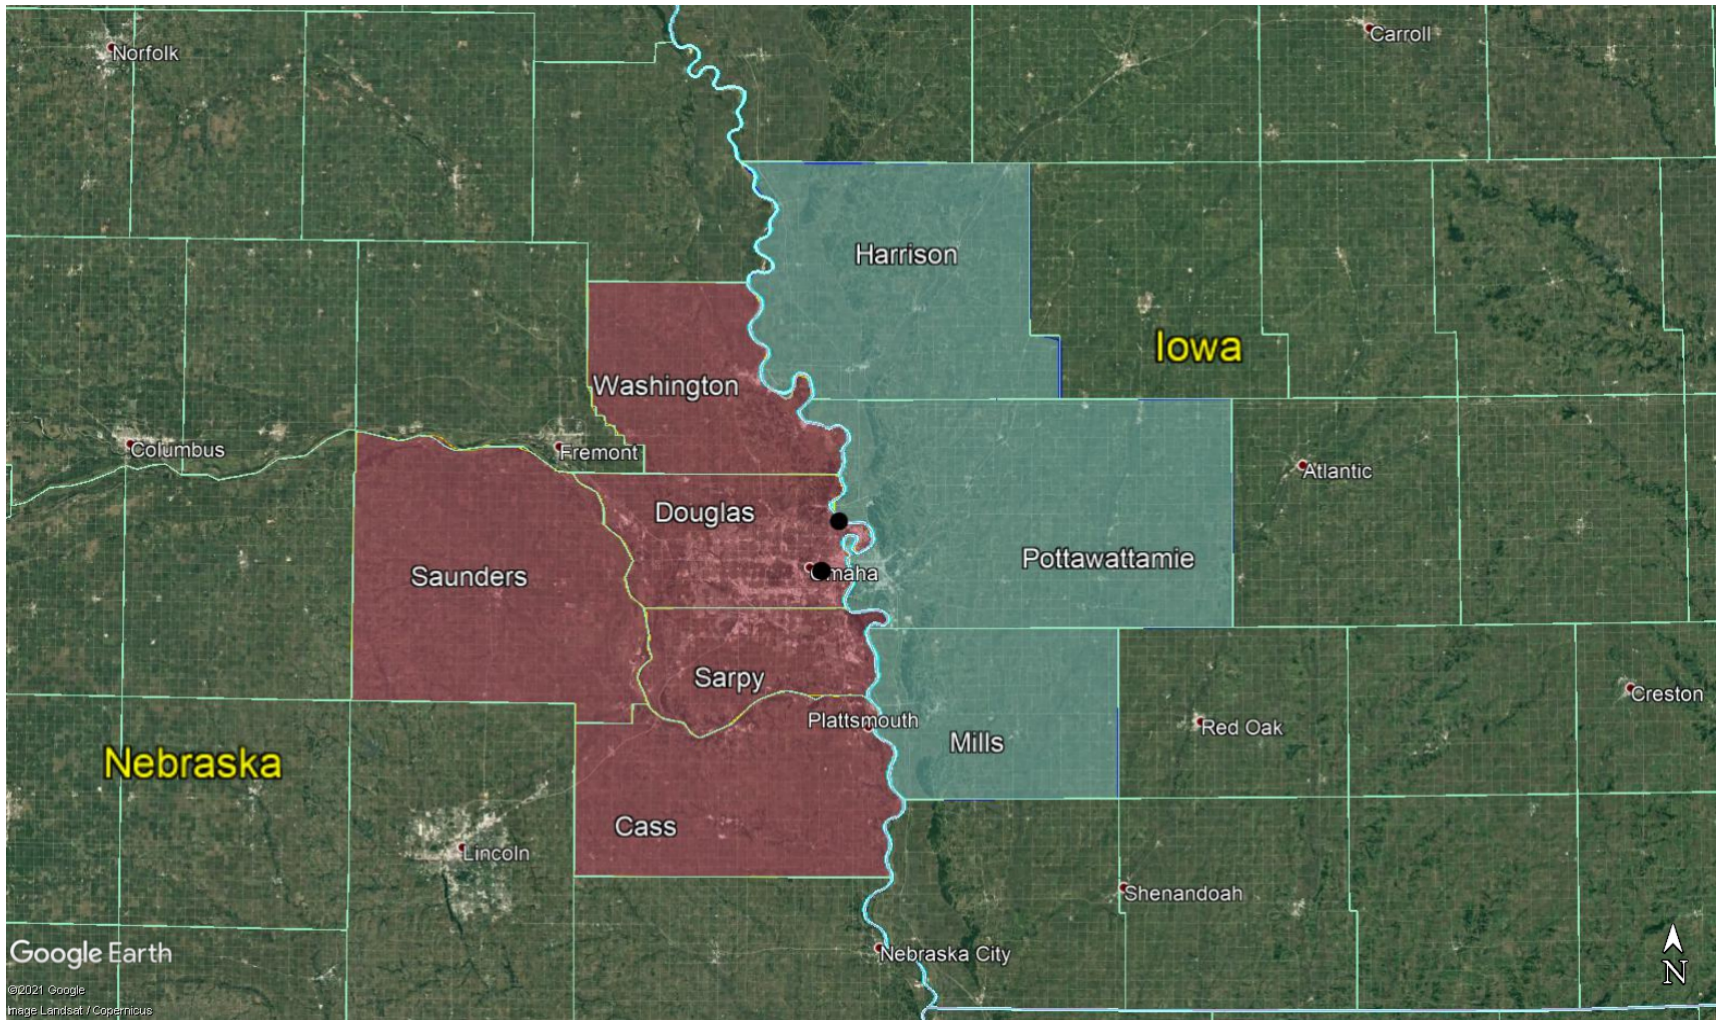


Omaha-Council Bluffs, NE-IA SO₂ SLAMS Monitoring Sites

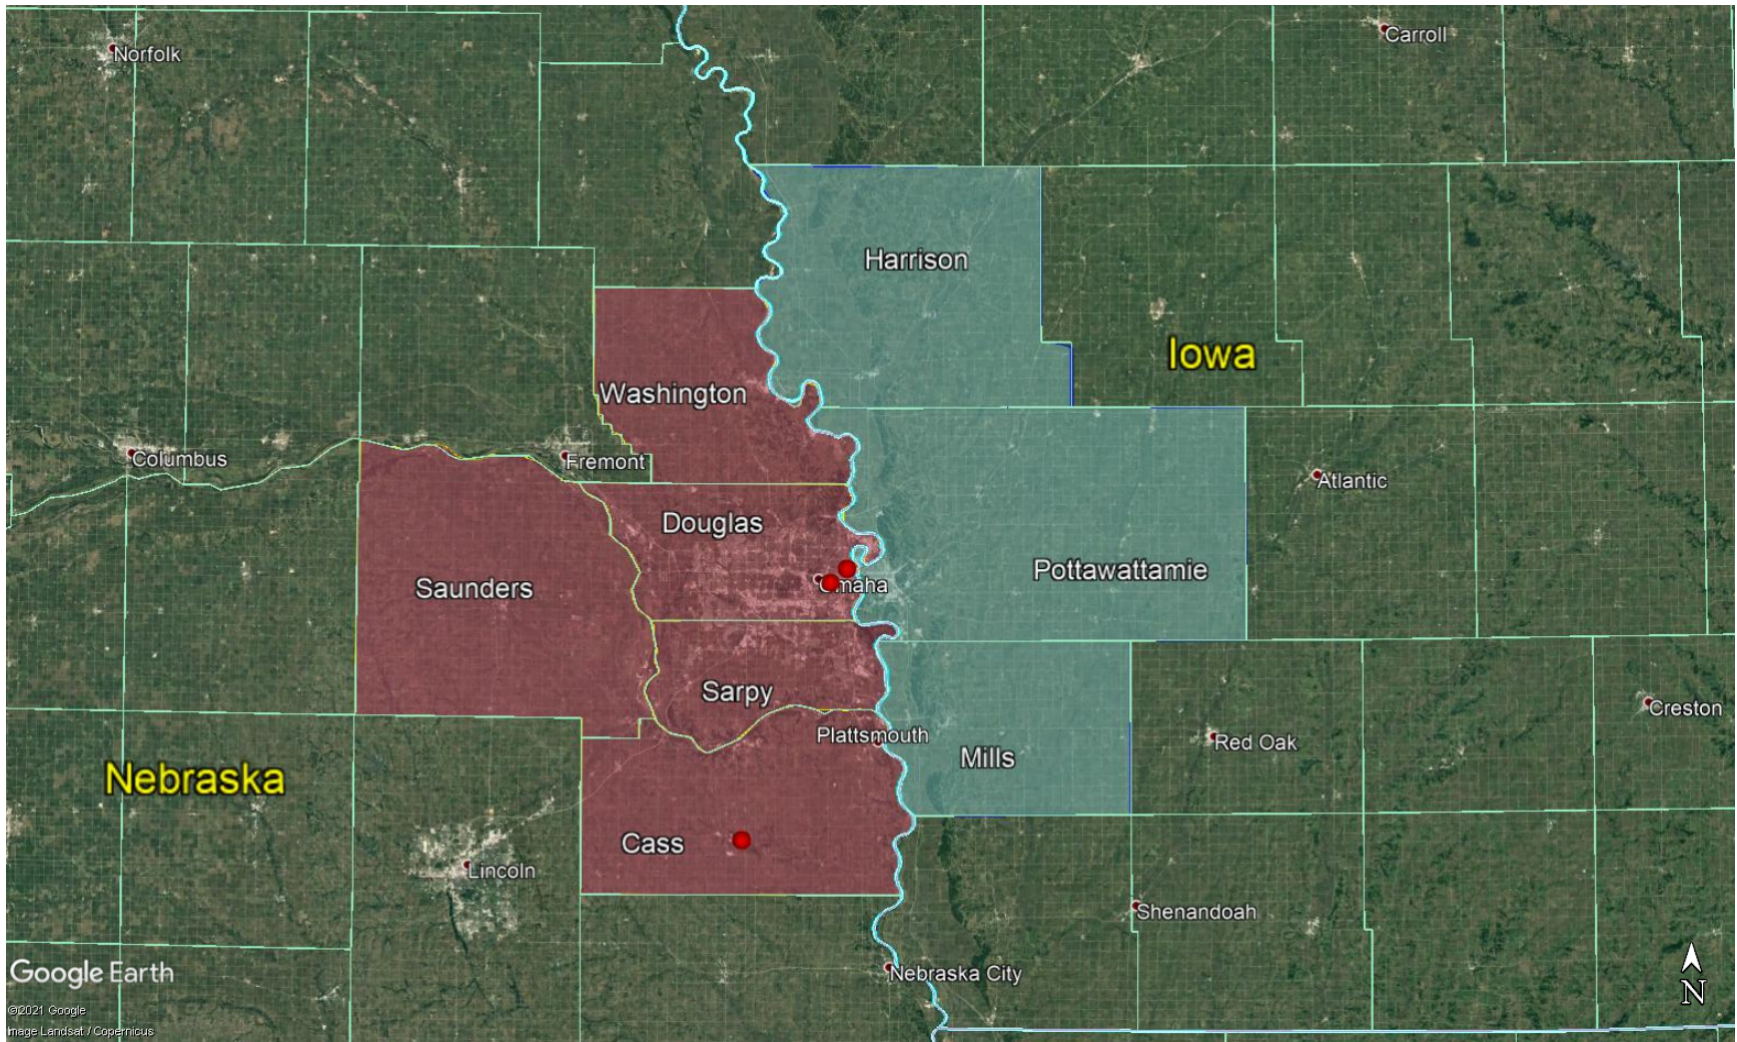


Omaha-Council Bluffs, NE-IA PM₁₀ SLAMS Monitoring Sites (Cass County site is not considered representative of the Omaha MSA)

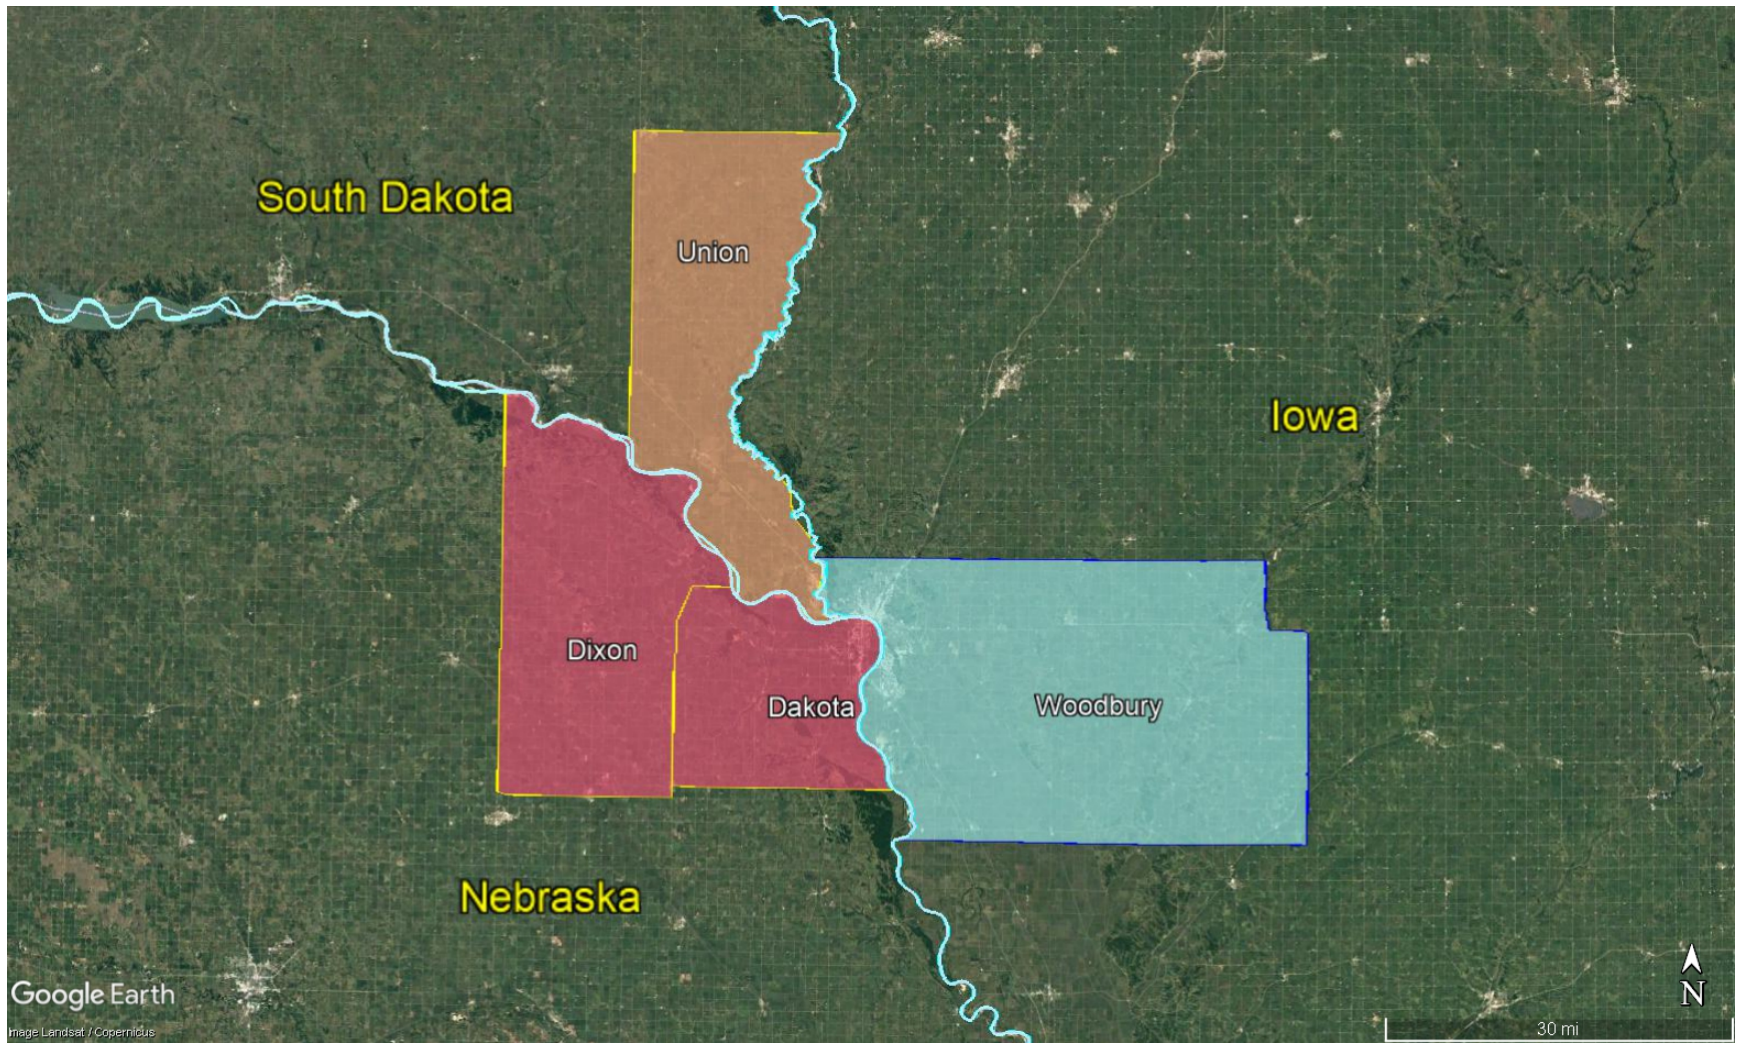


The Sioux City, IA-NE-SD MSA Currently has no SLAMS sites for any pollutants

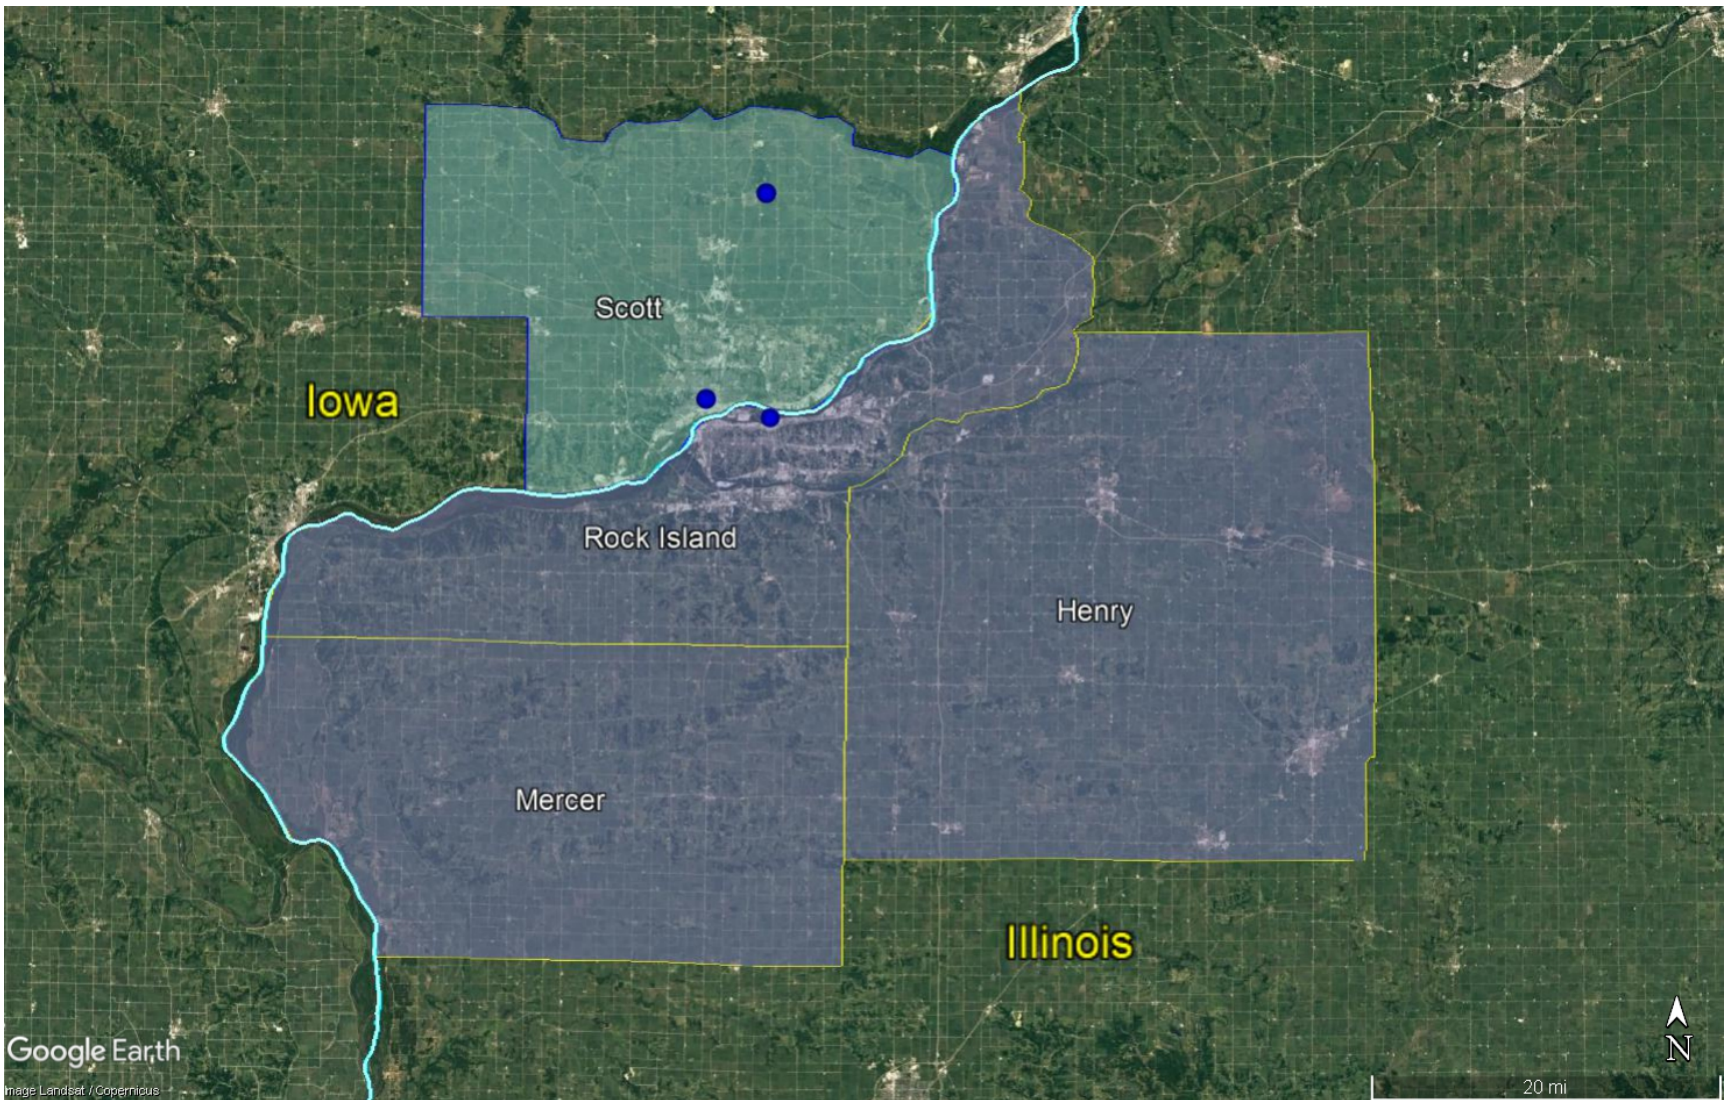


Davenport-Moline-Rock Island, IA-IL Ozone SLAMS Monitoring Sites

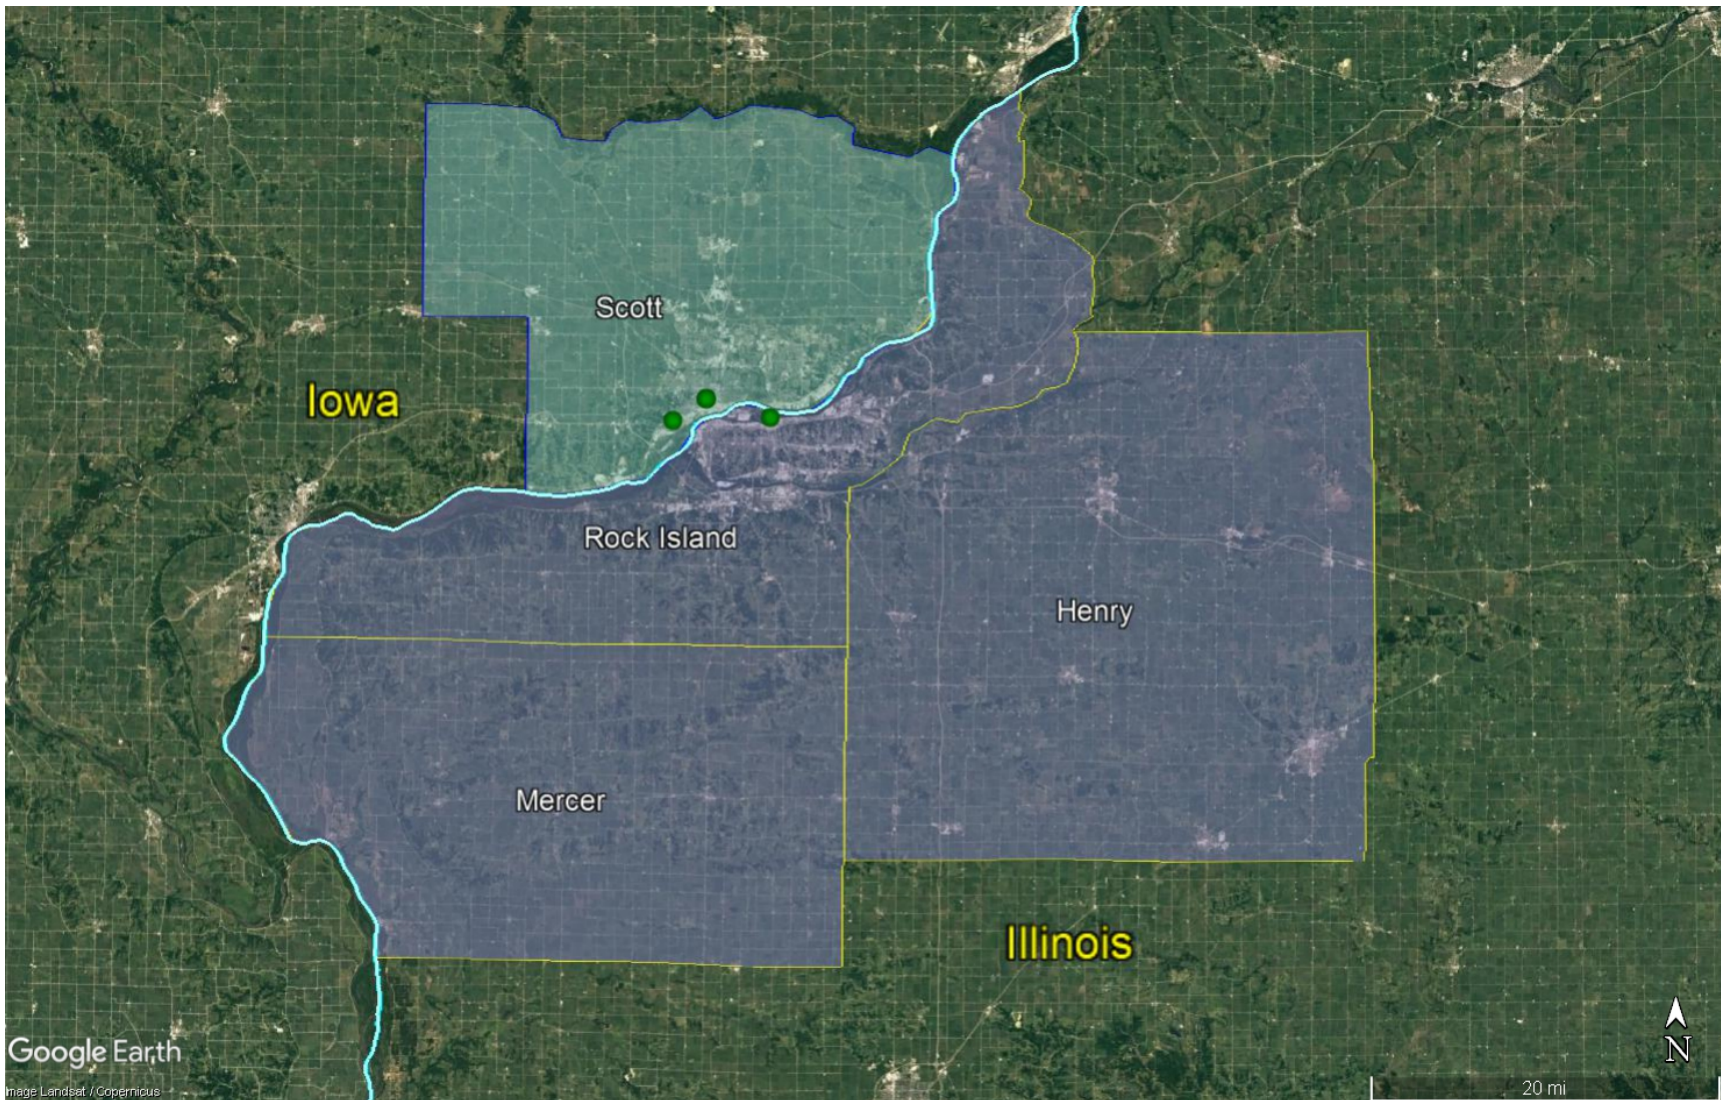

Davenport-Moline-Rock Island, IA-IL PM_{2.5} SLAMS Monitoring Sites

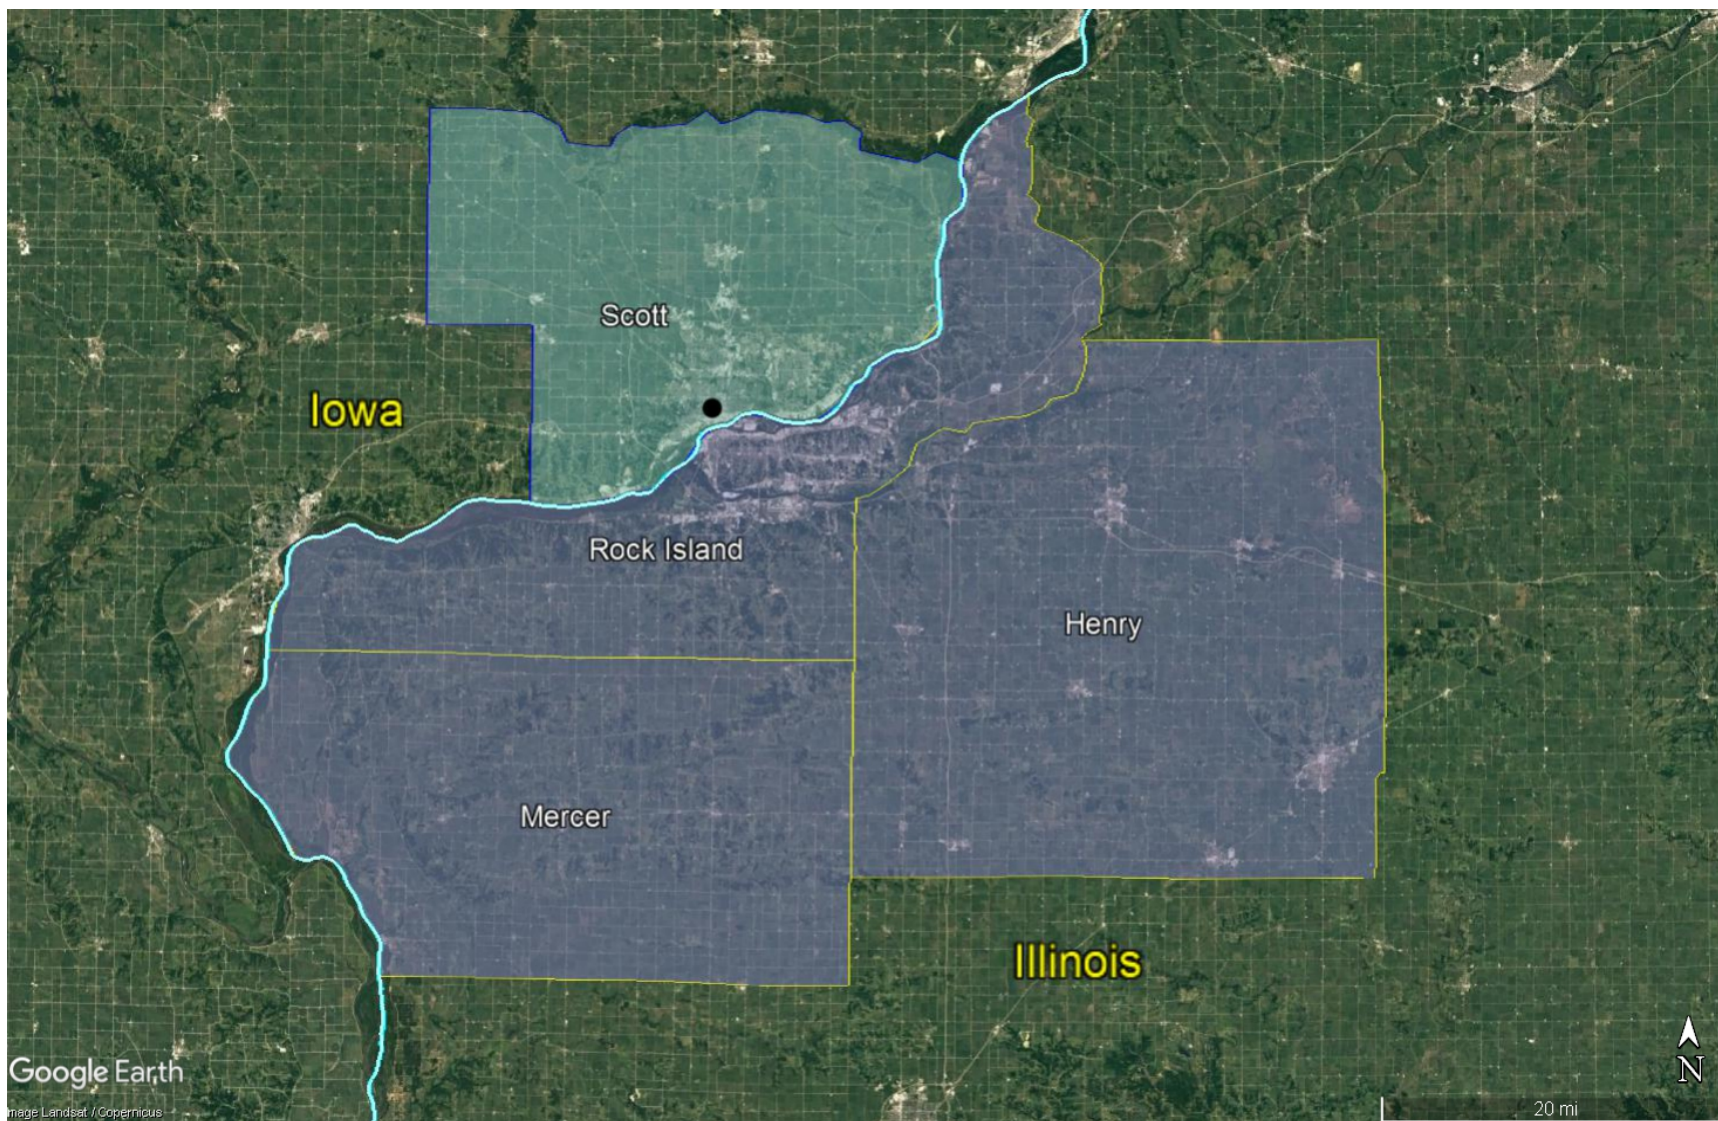

Davenport-Moline-Rock Island, IA-IL SO₂ SLAMS Monitoring Site

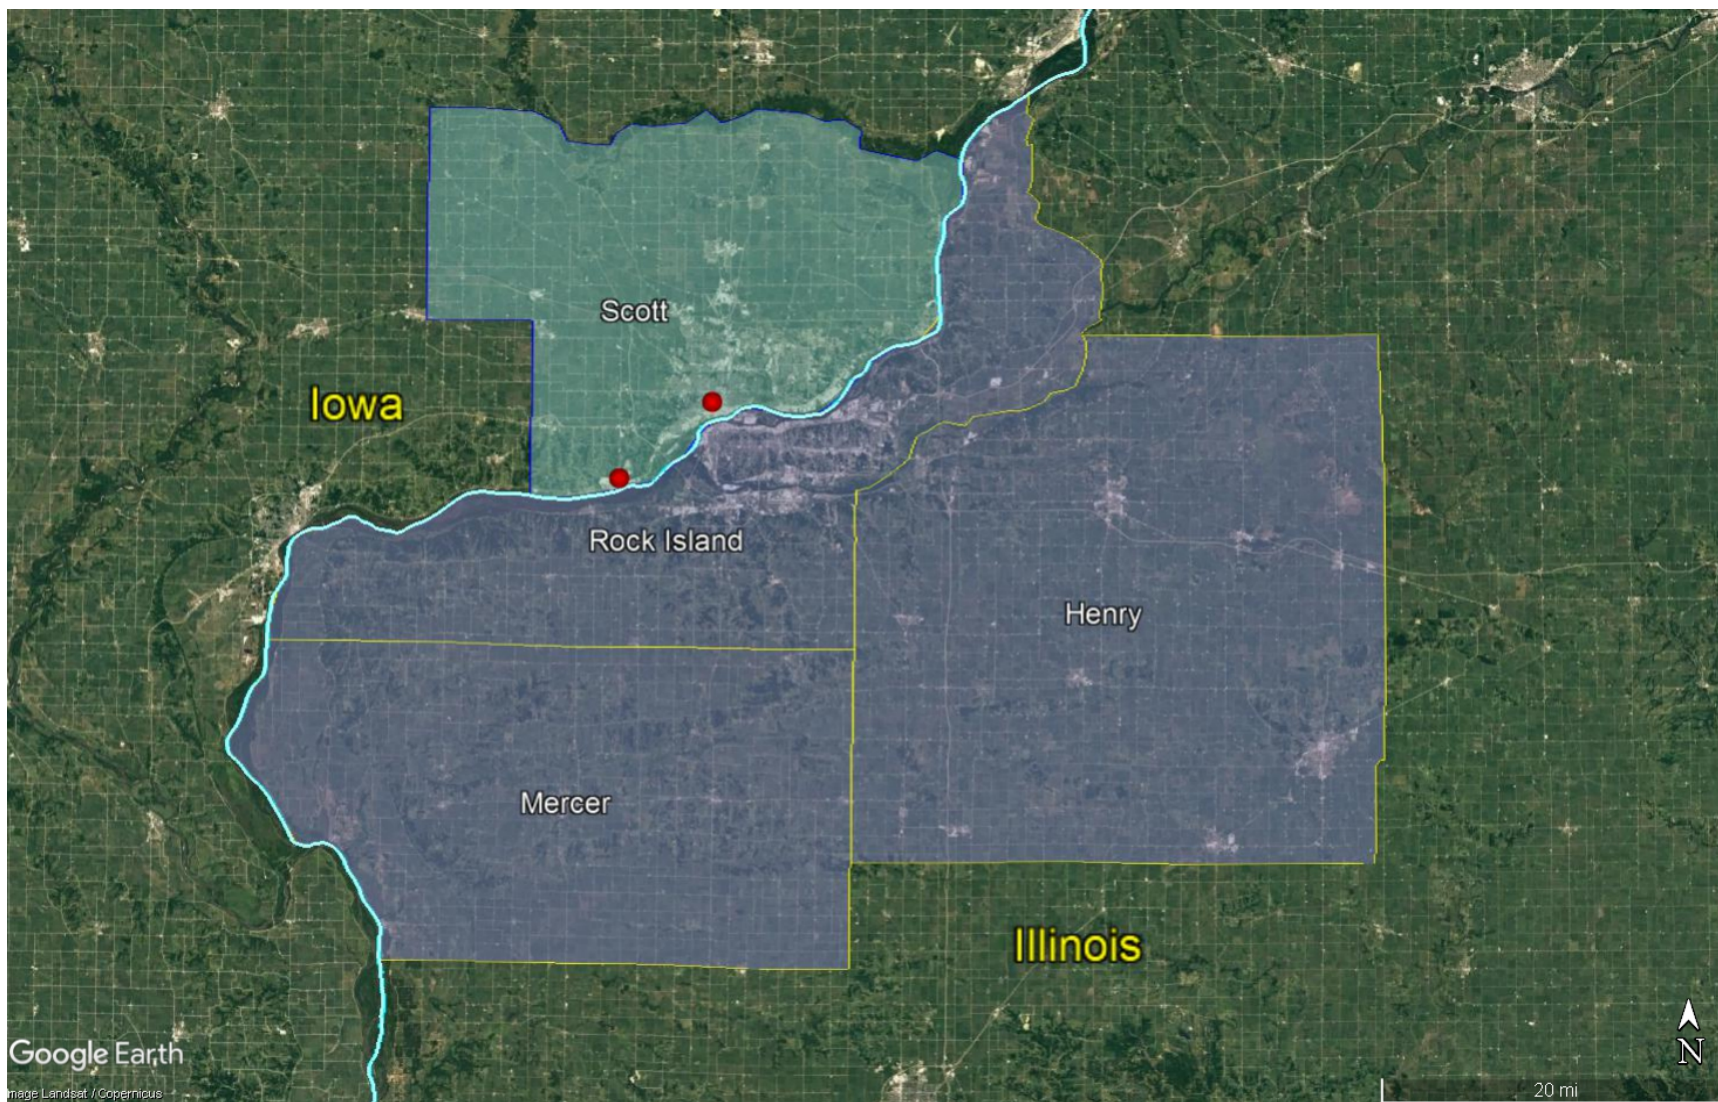

Davenport-Moline-Rock Island, IA-IL PM₁₀ SLAMS Monitoring Sites

Appendix I: Uniform Air Quality Index (AQI) and Daily Reporting

Appendix G to Part 58—Uniform Air Quality Index (AQI) and Daily Reporting

General Requirements

1. What is the AQI?
2. Why report the AQI?
3. Must I report the AQI?
4. What goes into my AQI report?
5. Is my AQI report for my MSA only?
6. How do I get my AQI report to the public?
7. How often must I report the AQI?
8. May I make exceptions to these reporting requirements?

Calculation

9. How Does the AQI Relate to Air Pollution Levels?
10. What Monitors Should I Use To Get the Pollutant Concentrations for Calculating the AQI?
11. Do I have to forecast the AQI?
12. How Do I Calculate the AQI?

Background and Reference Materials

13. What Additional Information Should I Know?

General Requirements

1. What Is the AQI?

The AQI is a tool that simplifies reporting air quality to the general public. The AQI incorporates into a single index concentrations of 5 criteria pollutants: ozone (O₃), particulate matter (PM), carbon monoxide (CO), sulfur dioxide (SO₂), and nitrogen dioxide (NO₂). The scale of the index is divided into general categories that are associated with health messages.

2. Why Report the AQI?

The AQI offers various advantages:

- a. It is simple to create and understand.
- b. It conveys the health implications of air quality.
- c. It promotes uniform use throughout the country.

3. Must I Report the AQI?

You must report the AQI daily if yours is a metropolitan statistical area (MSA) with a population over 350,000.

4. What Goes Into My AQI Report?

- i. Your AQI report must contain the following:
 - a. The reporting area(s) (the MSA or subdivision of the MSA).
 - b. The reporting period (the day for which the AQI is reported).
 - c. The critical pollutant (the pollutant with the highest index value).
 - d. The AQI (the highest index value).
 - e. The category descriptor and index value associated with the AQI and, if you choose to report in a color format, the associated color. Use only the following descriptors and colors for the six AQI categories:

Table 1—AQI Categories

For this AQI	Use this descriptor	And this color ¹
0 to 50	“Good”	Green.
51 to 100	“Moderate”	Yellow.
101 to 150	“Unhealthy for Sensitive Groups”	Orange.
151 to 200	“Unhealthy”	Red.
201 to 300	“Very Unhealthy”	Purple.
301 and above	“Hazardous”	Maroon. ¹

¹Specific colors can be found in the most recent reporting guidance (Guideline for Public Reporting of Daily Air Quality—Air Quality Index (AQI)).

f. The pollutant specific sensitive groups for any reported index value greater than 100. Use the following sensitive groups for each pollutant:

When this pollutant has an index value above 100 * * *	Report these sensitive groups * * *
Ozone	Children and people with asthma are the groups most at risk.
PM _{2.5}	People with respiratory or heart disease, the elderly and children are the groups most at risk.
PM ₁₀	People with respiratory disease are the group most at risk.
CO	People with heart disease are the group most at risk.
SO ₂	People with asthma are the group most at risk.
NO ₂	Children and people with respiratory disease are the groups most at risk.

- ii. When appropriate, your AQI report may also contain the following:
 - a. Appropriate health and cautionary statements.
 - b. The name and index value for other pollutants, particularly those with an index value greater than 100.
 - c. The index values for sub-areas of your MSA.
 - d. Causes for unusual AQI values.
 - e. Actual pollutant concentrations.

5. Is My AQI Report for My MSA Only?

Generally, your AQI report applies to your MSA only. However, if a significant air quality problem exists (AQI greater than 100) in areas significantly impacted by your MSA but not in it (for example, O₃ concentrations are often highest downwind and outside an urban area), you should identify these areas and report the AQI for these areas as well.

6. How Do I Get My AQI Report to the Public?

You must furnish the daily report to the appropriate news media (radio, television, and newspapers). You must make the daily report publicly available at one or more places of public access, or by any other means, including a

recorded phone message, a public Internet site, or facsimile transmission. When the AQI value is greater than 100, it is particularly critical that the reporting to the various news media be as extensive as possible. At a minimum, it should include notification to the media with the largest market coverages for the area in question.

7. How Often Must I Report the AQI?

You must report the AQI at least 5 days per week. Exceptions to this requirement are in section 8 of this appendix.

8. May I Make Exceptions to These Reporting Requirements?

- i. If the index value for a particular pollutant remains below 50 for a season or year, then you may exclude the pollutant from your calculation of the AQI in section 12.
- ii. If all index values remain below 50 for a year, then you may report the AQI at your discretion. In subsequent years, if pollutant levels rise to where the AQI would be above 50, then the AQI must be reported as required in sections 3, 4, 6, and 7 of this appendix.

Calculation

9. How does the AQI relate to air pollution levels?

For each pollutant, the AQI transforms ambient concentrations to a scale from 0 to 500. The AQI is keyed as appropriate to the national ambient air quality standards (NAAQS) for each pollutant. In most cases, the index value of 100 is associated with the numerical level of the short-term standard (i.e., averaging time of 24-hours or less) for each pollutant. The index value of 50 is associated with the numerical level of the annual standard for a pollutant, if there is one, at one-half the level of the short-term standard for the pollutant, or at the level at which it is appropriate to begin to provide guidance on cautionary language. Higher categories of the index are based on increasingly serious health effects and increasing proportions of the population that are likely to be affected. The index is related to other air pollution concentrations through linear interpolation based on these levels. The AQI is equal to the highest of the numbers corresponding to each pollutant. For the purposes of reporting the AQI, the sub-indexes for PM₁₀ and PM_{2.5} are to be considered separately. The pollutant responsible for the highest index value (the reported AQI) is called the "critical" pollutant.

10. What monitors should I use to get the pollutant concentrations for calculating the AQI?

You must use concentration data from State/Local Air Monitoring Station (SLAMS) or parts of the SLAMS required by 40 CFR 58.10 for each pollutant except PM. For PM, calculate and report the AQI on days for which you have measured air quality data (e.g., from continuous PM_{2.5} monitors required in Appendix D to this part). You may use PM measurements from monitors that are not reference or equivalent methods (for example, continuous PM₁₀ or PM_{2.5} monitors). Detailed guidance for relating non-approved measurements to approved methods by statistical linear regression is referenced in section 13 below.

11. Do I Have to Forecast the AQI?

You should forecast the AQI to provide timely air quality information to the public, but this is not required. If you choose to forecast the AQI, then you may consider both long-term and short-term forecasts. You can forecast the AQI at least 24-hours in advance using the most accurate and reasonable procedures considering meteorology, topography, availability of data, and forecasting expertise. The document "Guideline for Developing an Ozone Forecasting Program" (the Forecasting Guidance) will help you start a forecasting program. You can also issue short-term forecasts by predicting 8-hour ozone values from 1-hour ozone values using methods suggested in the Reporting Guidance, "Guideline for Public Reporting of Daily Air Quality."

12. How do I calculate the AQI?

i. The AQI is the highest value calculated for each pollutant as follows:

a. Identify the highest concentration among all of the monitors within each reporting area and truncate as follows:

- (1) Ozone—truncate to 3 decimal places
- PM_{2.5}—truncate to 1 decimal place
- PM₁₀—truncate to integer
- CO—truncate to 1 decimal place
- SO₂—truncate to integer
- NO₂—truncate to integer

(2) [Reserved]

b. Using Table 2, find the two breakpoints that contain the concentration.

c. Using Equation 1, calculate the index.

d. Round the index to the nearest integer.

Table 2—Breakpoints for the AQI

These breakpoints							Equal these AQI's	
O ₃ (ppm) 8-hour	O ₃ (ppm) 1-hour ¹	PM _{2.5} (µg/m ³) 24-hour	PM ₁₀ (µg/m ³) 24-hour	CO (ppm) 8-hour	SO ₂ (ppb) 1-hour	NO ₂ (ppb) 1-hour	AQI	Category
0.000-0.054		0.0-12.0	0-54	0.0-4.4	0-35	0-53	0-50	Good.
0.055-0.070		12.1-35.4	55-154	4.5-9.4	36-75	54-100	51-100	Moderate.
0.071-0.085	0.125-0.164	35.5-55.4	155-254	9.5-12.4	76-185	101-360	101-150	Unhealthy for Sensitive Groups.
0.086-0.105	0.165-0.204	³ 55.5-150.4	255-354	12.5-15.4	⁴ 186-304	361-649	151-200	Unhealthy.
0.106-0.200	0.205-0.404	³ 150.5-250.4	355-424	15.5-30.4	⁴ 305-604	650-1249	201-300	Very Unhealthy.
201-(²)	0.405-0.504	³ 250.5-350.4	425-504	30.5-40.4	⁴ 605-804	1250-1649	301-400	Hazardous.
(²)	0.505-0.604	³ 350.5-500.4	505-604	40.5-50.4	⁴ 805-1004	1650-2049	401-500	

¹Areas are generally required to report the AQI based on 8-hour ozone values. However, there are a small number of areas where an AQI based on 1-hour ozone values would be more precautionary. In these cases, in addition to calculating the 8-hour ozone index value, the 1-hour ozone index value may be calculated, and the maximum of the two values reported.

²8-hour O₃ values do not define higher AQI values (≥301). AQI values of 301 or greater are calculated with 1-hour O₃ concentrations.

³If a different SHL for PM_{2.5} is promulgated, these numbers will change accordingly.

⁴1-hr SO₂ values do not define higher AQI values (≥200). AQI values of 200 or greater are calculated with 24-hour SO₂ concentrations.

ii. If the concentration is equal to a breakpoint, then the index is equal to the corresponding index value in Table 2. However, Equation 1 can still be used. The results will be equal. If the concentration is between two breakpoints, then calculate the index of that pollutant with Equation 1. You must also note that in some areas, the AQI based on 1-hour O₃ will be more precautionary than using 8-hour values (see footnote 1 to Table 2). In these cases, you may use 1-hour values as well as 8-hour values to calculate index values and then use the maximum index value as the AQI for O₃.

$$I_p = \frac{I_{Hi} - I_{Lo}}{BP_{Hi} - BP_{Lo}} (C_p - BP_{Lo}) + I_{Lo} \quad (\text{Equation 1})$$

Where:

I_p = the index value for pollutant_p

C_p = the truncated concentration of pollutant_p

BP_{Hi} = the breakpoint that is greater than or equal to C_p

BP_{Lo} = the breakpoint that is less than or equal to C_p

I_{Hi} = the AQI value corresponding to BP_{Hi}

I_{Lo} = the AQI value corresponding to BP_{Lo} .

iii. If the concentration is larger than the highest breakpoint in Table 2 then you may use the last two breakpoints in Table 2 when you apply Equation 1.

Example

iv. Using Table 2 and Equation 1, calculate the index value for each of the pollutants measured and select the one that produces the highest index value for the AQI. For example, if you observe a PM₁₀ value of 210 µg/m³, a 1-hour O₃ value of 0.156 ppm, and an 8-hour O₃ value of 0.130 ppm, then do this:

a. Find the breakpoints for PM₁₀ at 210 µg/m³ as 155 µg/m³ and 254 µg/m³, corresponding to index values 101 and 150;

b. Find the breakpoints for 1-hour O₃ at 0.156 ppm as 0.125 ppm and 0.164 ppm, corresponding to index values 101 and 150;

c. Find the breakpoints for 8-hour O₃ at 0.130 ppm as 0.116 ppm and 0.374 ppm, corresponding to index values 201 and 300;

d. Apply Equation 1 for 210 µg/m³, PM₁₀:

$$\frac{150 - 101}{254 - 155} (210 - 155) + 101 = 128$$

e. Apply Equation 1 for 0.156 ppm, 1-hour O₃:

$$\frac{150 - 101}{0.164 - 0.125} (0.156 - 0.125) + 101 = 140$$

f. Apply Equation 1 for 0.130 ppm, 8-hour O₃:

$$\frac{300 - 201}{0.374 - 0.116} (0.130 - 0.116) + 201 = 206$$

g. Find the maximum, 206. This is the AQI. The minimal AQI report would read:

v. Today, the AQI for my city is 206 which is Very Unhealthy, due to ozone. Children and people with asthma are the groups most at risk.

13. What additional information should I know?

The EPA has developed a computer program to calculate the AQI for you. The program prompts for inputs, and it displays all the pertinent information for the AQI (the index value, color, category, sensitive group, health effects, and cautionary language). The EPA has also prepared a brochure on the AQI that explains the index in detail (The Air Quality Index), Reporting Guidance (Technical Assistance Document for the Reporting of Daily Air Quality—the Air Quality Index (AQI)) that provides associated health effects and cautionary statements, and Forecasting Guidance (Guideline for Developing an Ozone Forecasting Program) that explains the steps necessary to start an air pollution forecasting program. You can download the program and the guidance documents at www.airnow.gov. Reference for relating non-approved PM measurements to approved methods (Eberly, S., T. Fitz-Simons, T. Hanley, L. Weinstock, T. Tamanini, G. Denniston, B. Lambeth, E. Michel, S. Bortnick. Data Quality Objectives (DQOs) For Relating Federal Reference Method (FRM) and Continuous PM_{2.5} Measurements to Report an Air Quality Index (AQI). U.S. Environmental Protection Agency, Research Triangle Park, NC. EPA-454/B-02-002, November 2002) can be found on the Ambient Monitoring Technology Information Center (AMTIC) Web site, <http://www.epa.gov/ttnamti1/>.

[64 FR 42547, Aug. 4, 1999, as amended at 73 FR 16513, Mar. 27, 2008; 75 FR 6537, Feb. 9, 2010; 75 FR 35602, June 22, 2010; 78 FR 3286, Jan. 15, 2013; 80 FR 65468, Oct. 26, 2015]

Appendix J: Federal Collocation Requirements and Operating Schedules

Unless otherwise indicated, all the following is quoted from Appendix A to 40 CFR Part 58.

Collocation Requirements for PM_{2.5}:

3.2.3 Collocated Quality Control Sampling Procedures for PM_{2.5}. For each pair of collocated monitors, designate one sampler as the primary monitor whose concentrations will be used to report air quality for the site, and designate the other as the quality control monitor. There can be only one primary monitor at a monitoring site for a given time period.

3.2.3.1 For each distinct monitoring method designation (FRM or FEM) that a PQAQ is using for a primary monitor, the PQAQ must have 15 percent of the primary monitors of each method designation collocated (values of 0.5 and greater round up); and have at least one collocated quality control monitor (if the total number of monitors is less than three). The first collocated monitor must be a designated FRM monitor.

3.2.3.2 In addition, monitors selected for collocation must also meet the following requirements:

(a) A primary monitor designated as an EPA FRM shall be collocated with a quality control monitor having the same EPA FRM method designation.

(b) For each primary monitor designated as an EPA FEM used by the PQAQ, 50 percent of the monitors designated for collocation, or the first if only one collocation is necessary, shall be collocated with a FRM quality control monitor and 50 percent of the monitors shall be collocated with a monitor having the same method designation as the FEM primary monitor. If an odd number of collocated monitors is required, the additional monitor shall be a FRM quality control monitor. An example of the distribution of collocated monitors for each unique FEM is provided below. Table A-2 of this appendix demonstrates the collocation procedure with a PQAQ having one type of primary FRM and multiple primary FEMs.

#Primary FEMS of a unique method designation	#Collocated	#Collocated with an FRM	#Collocated with same method designation
1-9	1	1	0
10-16	2	1	1
17-23	3	2	1
24-29	4	2	2
30-36	5	3	2
37-43	6	3	3

3.2.3.3 Since the collocation requirements are used to assess precision of the primary monitors and there can only be one primary monitor at a monitoring site, a site can only count for the collocation of the method designation of the primary monitor at that site.

3.2.3.4 The collocated monitors should be deployed according to the following protocol:

(a) Fifty percent of the collocated quality control monitors should be deployed at sites with annual average or daily concentrations estimated to be within plus or minus 20 percent of either the annual or 24-hour NAAQS and the remainder at the PQAOs discretion;

(b) If an organization has no sites with annual average or daily concentrations within ± 20 percent of the annual NAAQS or 24-hour NAAQS, 50 percent of the collocated quality control monitors should be deployed at those sites with the annual mean concentrations or 24-hour concentrations among the highest for all sites in the network and the remainder at the PQAOs discretion.

(c) The two collocated monitors must be within 4 meters (inlet to inlet) of each other and at least 2 meters apart for flow rates greater than 200 liters/min or at least 1 meter apart for samplers having flow rates less than 200 liters/min to preclude airflow interference. A waiver allowing up to 10 meters horizontal distance and up to 3 meters vertical distance (inlet to inlet) between a primary and collocated sampler may be approved by the Regional Administrator for sites at a neighborhood or larger scale of representation during the annual network plan approval process. Sampling and analytical methodologies must be consistently implemented for both primary and collocated quality control samplers and for all other samplers in the network.

(d) Sample the collocated quality control monitor on a 1-in-12 day schedule. Report the measurements from both primary and collocated quality control monitors at each collocated sampling site to AQS. The calculations for evaluating precision between the two collocated monitors are described in section 4.2.1 of this appendix.

From Appendix D to Part 58—Network Design Criteria for Ambient Air Quality Monitoring: 4.7.2 Requirement for Continuous PM_{2.5} Monitoring. The State, or where appropriate, local agencies must operate continuous PM_{2.5} analyzers equal to at least one-half (round up) the minimum required sites listed in Table D-5 of this appendix. At least one required continuous analyzer in each MSA must be collocated with one of the required FRM/FEM/ARM monitors, unless at least one of the required FRM/FEM/ARM monitors is itself a continuous FEM or ARM monitor in which case no collocation requirement applies. State and local air monitoring agencies must use methodologies and quality assurance/quality control (QA/QC) procedures approved by the EPA Regional Administrator for these required continuous analyzers. [This paragraph is from Appendix D to 40 CFR Part 58.]

Collocation Requirements for Manual PM₁₀:

3.3.4 Collocated Quality Control Sampling Procedures for Manual PM₁₀. Collocated sampling for PM₁₀ is only required for manual samplers. For each pair of collocated monitors, designate one sampler as the primary monitor whose concentrations will be used to report air quality for the site and designate the other as the quality control monitor.

3.3.4.1 For manual PM₁₀ samplers, a PQAQO must:

(a) Have 15 percent of the primary monitors collocated (values of 0.5 and greater round up); and

(b) Have at least one collocated quality control monitor (if the total number of monitors is less than three).

3.3.4.2 The collocated quality control monitors should be deployed according to the following protocol:

(a) Fifty percent of the collocated quality control monitors should be deployed at sites with daily concentrations estimated to be within plus or minus 20 percent of the applicable NAAQS and the remainder at the PQAOs discretion;

(b) If an organization has no sites with daily concentrations within plus or minus 20 percent of the NAAQS, 50 percent of the collocated quality control monitors should be deployed at those sites with the daily mean concentrations among the highest for all sites in the network and the remainder at the PQAOs discretion.

(c) The two collocated monitors must be within 4 meters (inlet to inlet) of each other and at least 2 meters apart for flow rates greater than 200 liters/min or at least 1 meter apart for samplers having flow rates less than 200 liters/min to preclude airflow interference. A waiver allowing up to 10 meters horizontal distance and up to 3 meters vertical distance (inlet to inlet) between a primary and collocated sampler may be approved by the Regional Administrator for sites at a neighborhood or larger scale of representation. This waiver may be approved during the annual network plan approval process. Sampling and analytical methodologies must be consistently implemented for both collocated samplers and for all other samplers in the network.

(d) Sample the collocated quality control monitor on a 1-in-12 day schedule. Report the measurements from both primary and collocated quality control monitors at each collocated sampling site to AQS. The calculations for evaluating precision between the two collocated monitors are described in section 4.2.1 of this appendix.

Collocated Quality Control Sampling for TSP Pb:

3.4.4 Collocated Quality Control Sampling for TSP Pb for monitoring sites other than non-source oriented NCore. For each pair of collocated monitors for manual TSP Pb samplers, designate one sampler as the primary monitor whose concentrations will be used to report air quality for the site, and designate the other as the quality control monitor.

3.4.4.1 A PQAO must:

(a) Have 15 percent of the primary monitors (not counting non-source oriented NCore sites in PQAO) collocated. Values of 0.5 and greater round up; and

(b) Have at least one collocated quality control monitor (if the total number of monitors is less than three).

3.4.4.2 The collocated quality control monitors should be deployed according to the following protocol:

(a) The first collocated Pb site selected must be the site measuring the highest Pb concentrations in the network. If the site is impractical, alternative sites, approved by the EPA Regional Administrator, may be selected. If additional collocated sites are necessary, collocated sites may be chosen that reflect average ambient air Pb concentrations in the network.

(b) The two collocated monitors must be within 4 meters (inlet to inlet) of each other and at least 2 meters apart for flow rates greater than 200 liters/min or at least 1 meter apart for samplers having flow rates less than 200 liters/min to preclude airflow interference.

(c) Sample the collocated quality control monitor on a 1-in-12 day schedule. Report the measurements from both primary and collocated quality control monitors at each collocated sampling site to AQS. The calculations for evaluating precision between the two collocated monitors are described in section 4.2.1 of this appendix.

40 CFR Part 58, § 58.12 Operating schedules.

State and local governments shall collect ambient air quality data at any SLAMS station on the following operational schedules:

(a) For continuous analyzers, consecutive hourly averages must be collected except during:

(1) Periods of routine maintenance,

(2) Periods of instrument calibration, or

(3) Periods or monitoring seasons exempted by the Regional Administrator.

(b) For Pb manual methods, at least one 24-hour sample must be collected every 6 days except during periods or seasons exempted by the Regional Administrator.

(c) For PAMS VOC samplers, samples must be collected as specified in section 5 of appendix D to this part. Area-specific PAMS operating schedules must be included as part of the PAMS network description and must be approved by the Regional Administrator.

(d) For manual PM2.5 samplers:

(1)(i) Manual PM2.5 samplers at required SLAMS stations without a collocated continuously operating PM2.5 monitor must operate on at least a 1-in-3 day schedule unless a waiver for an alternative schedule has been approved per paragraph (d)(1)(ii) of this section.

(ii) For SLAMS PM2.5 sites with both manual and continuous PM2.5 monitors operating, the monitoring agency may request approval for a reduction to 1-in-6 day PM2.5 sampling or for seasonal sampling from the EPA Regional Administrator. Other requests for a reduction to 1-in-6 day PM2.5 sampling or for seasonal sampling may be approved on a case-by-case basis. The EPA Regional Administrator may grant sampling frequency reductions after consideration of factors (including but not limited to the historical PM2.5 data quality assessments, the location of current PM2.5 design value sites, and their regulatory data needs) if the Regional Administrator determines that the reduction in sampling frequency will not compromise data needed for implementation of the NAAQS. Required SLAMS stations whose measurements determine the design value for their area and that are within ± 10 percent of the annual NAAQS, and all required sites where one or more 24-hour values have exceeded the 24-hour NAAQS each year for a consecutive period of at least 3 years are required to maintain at least a 1-in-3 day sampling frequency until the design value no longer meets these criteria for 3 consecutive years. A continuously operating FEM or ARM PM2.5 monitor satisfies this requirement unless it is identified in the monitoring agency's annual monitoring network plan as not appropriate for comparison to the NAAQS and the EPA Regional Administrator has approved that the data from that monitor may be excluded from comparison to the NAAQS.

(iii) Required SLAMS stations whose measurements determine the 24-hour design value for their area and whose data are within ± 5 percent of the level of the 24-hour PM2.5 NAAQS must have an FRM or FEM operate on a daily schedule if that area's design value for the annual NAAQS is less than the level of the annual PM2.5 standard. A continuously operating FEM or ARM PM2.5 monitor satisfies this requirement unless it is identified in the monitoring agency's annual monitoring network plan as not appropriate for comparison to the NAAQS and the EPA Regional Administrator has approved that the data from that monitor may be excluded from comparison to the NAAQS. The daily schedule must be maintained until the referenced design value no longer meets these criteria for 3 consecutive years.

(iv) Changes in sampling frequency attributable to changes in design values shall be implemented no later than January 1 of the calendar year following the certification of such data as described in §58.15.

(2) Manual PM2.5 samplers at NCore stations and required regional background and regional transport sites must operate on at least a 1-in-3 day sampling frequency.

(3) Manual PM2.5 speciation samplers at STN stations must operate on at least a 1-in-3 day sampling frequency unless a reduction in sampling frequency has been approved by the EPA Administrator based on factors such as area's design value, the role of the particular site in national health studies, the correlation of the site's species data with nearby sites, and presence of other leveraged measurements.

(e) For PM10 samplers, a 24-hour sample must be taken from midnight to midnight (local standard time) to ensure national consistency. The minimum monitoring schedule for the site in the area of expected maximum

concentration shall be based on the relative level of that monitoring site concentration with respect to the 24-hour standard as illustrated in Figure 1. If the operating agency demonstrates by monitoring data that during certain periods of the year conditions preclude violation of the PM₁₀ 24-hour standard, the increased sampling frequency for those periods or seasons may be exempted by the Regional Administrator and permitted to revert back to once in six days. The minimum sampling schedule for all other sites in the area remains once every six days. No less frequently than as part of each 5-year network assessment, the most recent year of data must be considered to estimate the air quality status at the site near the area of maximum concentration. Statistical models such as analysis of concentration frequency distributions as described in "Guideline for the Interpretation of Ozone Air Quality Standards," EPA-450/479-003, U.S. Environmental Protection Agency, Research Triangle Park, NC, January 1979, should be used. Adjustments to the monitoring schedule must be made on the basis of the 5-year network assessment. The site having the highest concentration in the most current year must be given first consideration when selecting the site for the more frequent sampling schedule. Other factors such as major change in sources of PM₁₀ emissions or in sampling site characteristics could influence the location of the expected maximum concentration site. Also, the use of the most recent 3 years of data might, in some cases, be justified in order to provide a more representative database from which to estimate current air quality status and to provide stability to the network. This multiyear consideration reduces the possibility of an anomalous year biasing a site selected for accelerated sampling. If the maximum concentration site based on the most current year is not selected for the more frequent operating schedule, documentation of the justification for selection of an alternative site must be submitted to the Regional Office for approval during the 5-year network assessment process. Minimum data completeness criteria, number of years of data and sampling frequency for judging attainment of the NAAQS are discussed in appendix K of part 50 of this chapter.

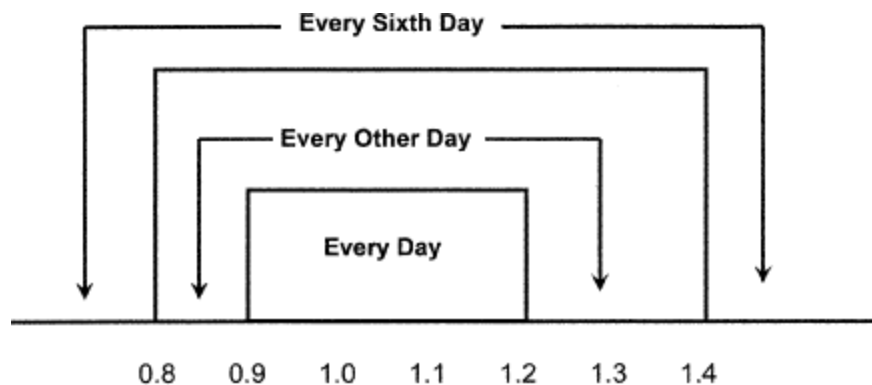


Figure 1 – Ratio to Standard

(f) For manual PM₁₀-2.5 samplers:

(1) Manual PM₁₀-2.5 samplers at NCore stations must operate on at least a 1-in-3 day schedule at sites without a collocated continuously operating federal equivalent PM₁₀-2.5 method that has been designated in accordance with part 53 of this chapter.

(2) [Reserved]

(g) For continuous SO₂ analyzers, the maximum 5-minute block average concentration of the twelve 5-minute blocks in each hour must be collected except as noted in §58.12 (a).

[71 FR 61298, Oct. 17, 2006, as amended at 72 FR 32210, June 12, 2007; 75 FR 35601, June 22, 2010; 78 FR 3282, Jan. 15, 2013; 81 FR 17279, Mar. 28, 2016]

Appendix K: Collocated Monitoring Network Analysis

For some criteria pollutants, EPA regulations require that multiple monitors be operated at the same site for the purpose of quality assurance ([Appendix J](#)) or public reporting ([Appendix I](#)). This Appendix compares the Iowa network to these requirements.

Ozone Network Analysis

There are no federal requirements for collocated ozone monitoring. In the Iowa network, continuous ozone data is generated at twelve sites. The data is used for real-time and AQI reporting and uploaded to the EPA's AirNow real-time reporting system, where it is consolidated to produce the national ozone and AQI maps. At each of the twelve sites, pairs of ozone monitors are operated to allow for a real-time check on the quality of the data. These are FEM monitors, and the data they produce is acceptable for NAAQS compliance and AQI reporting. When two FEM monitors are operated simultaneously at a monitoring site, data from the secondary ozone monitor is substituted for missing values from the primary monitor (40 CFR, Appendix U to Part 50). The combined dataset is then used to calculate a design value for the site.

PM_{2.5} Network Analysis

To meet EPA QA requirements, the Iowa network contains pairs of PM_{2.5} monitors (collocated monitors) at some sites. EPA regulations ([Appendix J](#)) require that 15 percent of the sites be collocated (values of 0.5 and greater round up), and a minimum of one collocated monitor within each monitoring group or primary quality assurance organization (PQAO). The Iowa network contains three PQAO's, corresponding to the Polk, Linn and SHL networks. Since the SHL network contains 15 FRM sites, 2.25 (rounding to 2) collocated sites are required. The Polk network (2 FRM sites) and Linn network (1 FRM site), each meet minimum collocation requirements by operation of a single collocated FRM site.

Linn County operates a collocated monitor at its Public Health site. Polk County operates its collocated monitor at its Health Department site. SHL uses two groups of field operators to run its PM_{2.5} samplers. Members of the SHL staff collect filters in the eastern part of the state where levels are typically higher. Contract operators collect filters in the western half of the state where levels are typically lower. SHL operates a collocated pair of filter samplers at its NCORE site. SHL also operates a collocated pair of filter samplers at Muscatine High School. A contract operator collects filters at a collocated site at Franklin School in Council Bluffs.

EPA regulations indicate that "50 percent of the collocated quality control monitors should be deployed at sites with annual average or daily concentrations estimated to be within ± 20 percent of either the annual or 24-hour NAAQS and the remainder at the PQAOs discretion".

Iowa has no sites within 20% of either PM_{2.5} NAAQS.

EPA also indicates that “If an organization has no sites with annual average or daily concentrations within ± 20 percent of the annual NAAQS or 24-hour NAAQS, 50 percent of the collocated quality control monitors should be deployed at those sites with the annual mean concentrations or 24-hour concentrations among the highest for all sites in the network and the remainder at the PQAOs discretion”.

This requirement is met automatically in the Linn PQA since they have only one $PM_{2.5}$ site. It is also met in the Polk PQA, which has two $PM_{2.5}$ sites that record similar design values. The collocated site at the Health Department currently has higher design values than the non-collocated site.

At all of the fifteen $PM_{2.5}$ FRM sites operated by SHL, the associated annual design value is a greater percentage of the annual NAAQS than the 24-hr design value is of the 24-hr NAAQS, so the annual ratio will be used as an indicator to rank the sites operated by SHL (see Figure K.1). The Muscatine High School site in Muscatine is among the top 50 percent in the SHL network. As for the remaining discretionary collocated sites, the Department feels that there is value in operating collocated $PM_{2.5}$ monitors in support of a collocated $PM_{10-2.5}$ site at Jefferson School in Davenport, and additional value in providing collocated $PM_{2.5}$ data at Franklin School site in Council Bluffs, located in the most highly populated MSA in the State.

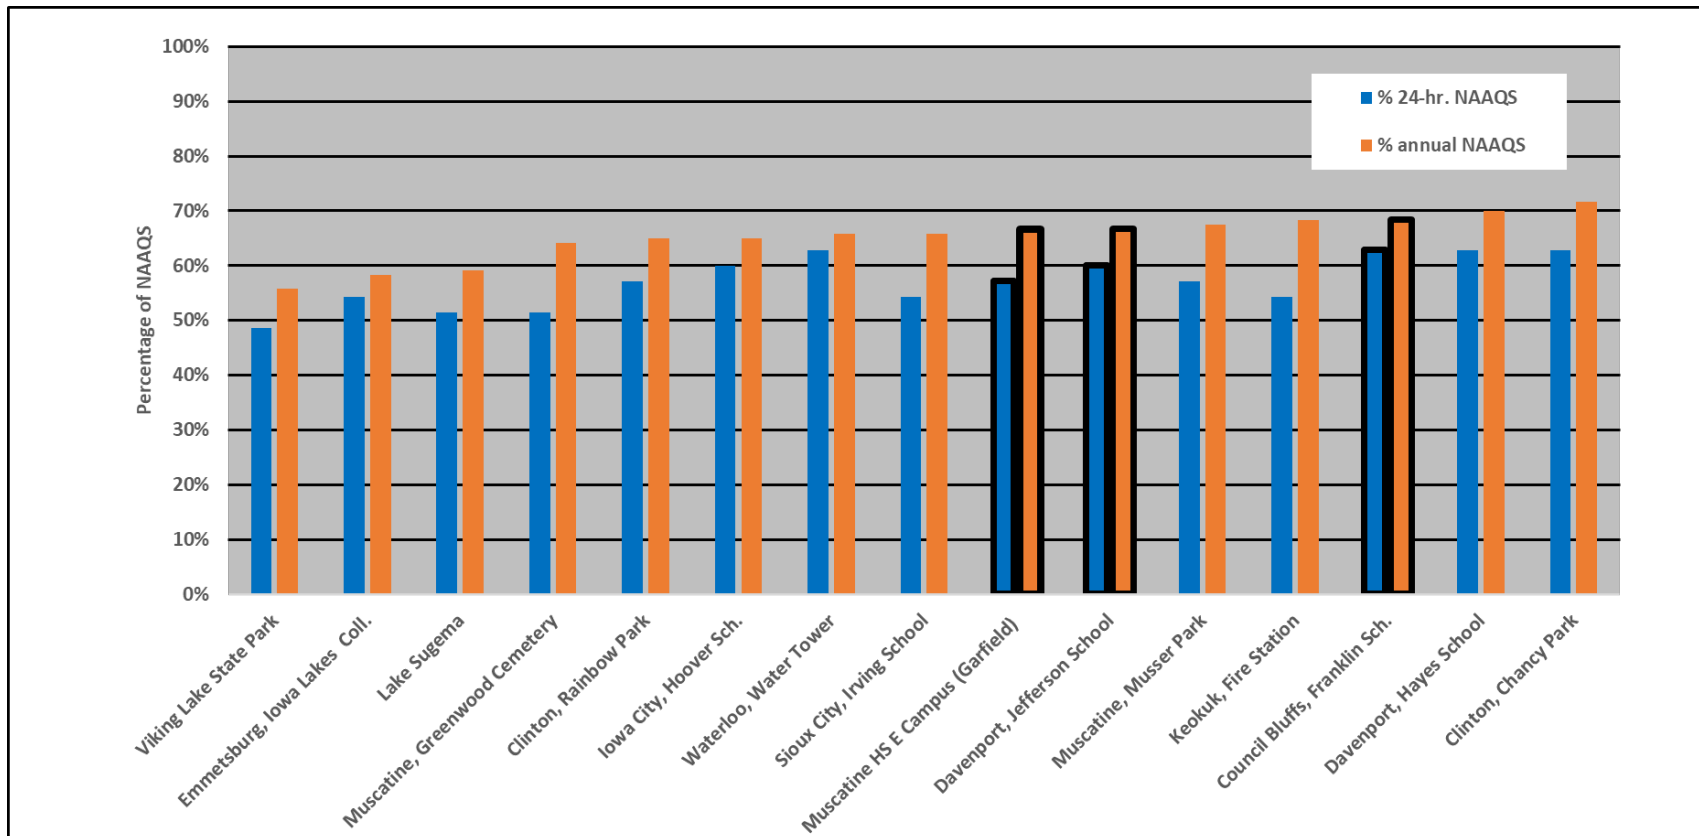


Figure K.1 SHL 2022 PM_{2.5} Design Values as a percentage of the NAAQS. Collocated Monitors are outlined in black.

Continuous PM_{2.5} Monitoring Requirements

In MSAs where a single PM_{2.5} monitor is required and with populations over 350,000 (i.e. the Omaha-Council Bluffs, NE-IA and Des Moines-West Des Moines, IA MSA's⁴⁹), 40 CFR Part 58 requires that an additional continuous PM_{2.5} monitor is operated at the same monitoring location ([Appendix E](#) and [Appendix I](#)). A continuous PM_{2.5} monitor for the Omaha-Council Bluffs MSA is operated by a Nebraska agency, and a continuous PM_{2.5} monitor is currently operated in Des Moines to meet this requirement. NCore sites ([Appendix O](#)) also require a continuous PM_{2.5} monitor. The Department operates a continuous PM_{2.5} sampler at its Jefferson School site in Davenport (AQS ID 191630015) to meet this requirement.

In the Iowa PM_{2.5} network, continuous PM_{2.5} data is generated at eleven sites. At all but one of these sites, pairs of continuous monitors are operated. The secondary monitor allows for a real-time check on the quality of the data from the primary monitor. The data from all eleven sites is uploaded to the EPA's AirNow⁵⁰ system where it is consolidated along with data from other states to produce the national PM_{2.5} and AQI maps.

If the data from a FEM continuous monitor can be determined to be NAAQS comparable, it can substitute for FRM data for establishing attainment with the NAAQS.⁵¹

In 2021, five Iowa sites were operated with FEM monitors, the Health Department site (AQS ID 191530030) in Des Moines with collocated BAM 1022 analyzers, the Jefferson School site (AQS ID 191630015) in Davenport, the Hoover School site (AQS ID 191032001) in Iowa City, the Chancy Park site (AQS ID 190450019) and the Public Health site (AQS ID 191130040) in Cedar Rapids, all with collocated T640 analyzers.

The remaining five sites were operated with non-FEM monitors (BAM1020 analyzers with SCC separators). In the comparability analysis below, we include all continuous monitors (both FEM and non-FEM) for the sake of completeness.

To establish NAAQS comparability of continuous and FRM data at a monitoring site requires that one perform a linear regression of the 24-hour average continuous data against the FRM data for the period of interest.⁵² The slope (S), intercept (I) and coefficient of correlation (R) resulting from this analysis are compared to the PM_{2.5} Class III Acceptance Criteria contained in Table C-4 of 40 CFR Part 53.^{53,54,55} According to this table, when the FRM data has a

⁴⁹ See: [PM_{2.5} Monitoring Network Analysis](#)

⁵⁰ [EPA's AirNow](#)

⁵¹ [40 CFR Part 50 Appendix N](#)

⁵² [EPA memo on Comparability Assessments](#)

⁵³ [40 CFR Part 53](#)

⁵⁴ [EPA Air Data](#). In the lower right corner of the webpage (under "Generate Technical Reports") see "PM_{2.5} Continuous Monitor Comparability Assessments".

⁵⁵ [EPA AMTIC Site](#). See bullet item "Spreadsheet with example data included (xls file) (410K)".

concentration coefficient of variation (CCV) ≥ 0.5 , R from the regression analysis is required to be ≥ 0.95 . However, 40 CFR Part 58⁵⁶ indicates that failure to meet the correlation criteria, by itself, is not cause to exclude data from a continuous monitor. Therefore, the essential elements of the PM_{2.5} Class III Acceptance Criteria for the purpose of establishing comparability of continuous and FRM data at a site are that the Slope and Intercept from the regression analysis must lie inside a particular region specified in Table C-4 of Part 53; this region is indicated with red lines in Figure K.2 below.

For the 2022 Iowa data, the CCV's of the FRM data at all sites with collocated FRM and continuous data were greater than 0.5, and so the criterion for the coefficient of correlation for the FEM vs FRM from Part 53 is $R \geq 0.95$.

The results of the regression analysis are compared to the acceptance criteria in Table K.1.

Seven continuous monitors satisfied the (non-essential) criterion $R \geq 0.95$. Seven monitors met both the slope and intercept criteria; as indicated in green on the chart (Figure K.2) and in the table (Table K.1). Three monitors met all criteria for S, R, and I.

Six of the ten FEM monitors met the slope and intercept criteria for 2022. Included in this category were both of the collocated T640 analyzers at the Jefferson School site in Davenport, as well as both at the Iowa City Hoover School site; the POC 3 T640 at the Public Health site in Cedar Rapids, and the POC 3 BAM 1022 at the Health Dept. site in Des Moines.

The DNR coded the data from the remaining three FEM T640 PM_{2.5} monitors as parameter code 88502 to indicate that these monitors are eligible for public reporting but the data should not be used for NAAQS determination. These include a POC 4 T640 PM_{2.5} monitor at the Public Health site in Cedar Rapids, and both T640 analyzers at the Chancy Park site in Clinton. In the event that there are FEM monitors that do not meet the PM_{2.5} comparability requirements for data collected in calendar year 2023, the data will be coded as parameter 88502 (Acceptable for AQI only) at SLAMs and SPM monitors.

Currently the AQS database does not allow parameter code 88502 to be used for data collected by a BAM 1022 sampler. Since the POC 4 BAM at the Polk Health Dept. was within 0.01 ug/m³ of meeting the slope requirement, and visually appeared to be on the outline of the box, the DNR in consultation with Polk determined not to apply a NAAQS exclusion flag to data collected from that monitor in 2022.

⁵⁶ See: §58.11 e (6) in [Appendix A](#)

Site Name	Monitor #	AQS ID-POC	Instrument Type	FEM?	In Box?	Slope	Intercept	R	Count
Cedar Rapids, Public Health	1	19-113-0040-3	T640	Y	Y	1.026	1.447918	0.96	354
Davenport, Jefferson School	2	19-163-0015-3	T640	Y	Y	0.993	1.6349345	0.96	334
Iowa City, Hoover School	3	19-103-2001-3	T640	Y	Y	0.996	1.3632349	0.93	296
Iowa City, Hoover School	4	19-103-2001-4	T640	Y	Y	0.992	1.5406322	0.93	334
Muscatine HS, East Campus Trailer	5	19-139-0019-3	BAM 1020	N	Y	0.914	-0.382057	0.90	330
Des Moines, Health Dept.	6	19-153-0030-3	BAM-1022	Y	Y	0.948	-0.110894	0.95	355
Davenport, Jefferson School	7	19-163-0015-4	T640	Y	Y	0.987	1.5782037	0.94	336
Clinton, Chancy Park	8	19-045-0019-4	T640	Y	N	1.059	1.601102	0.96	291
Cedar Rapids, Public Health	9	19-113-0040-4	T640	Y	N	1.048	1.4597131	0.96	356
Waterloo, Water Tower	10	19-013-0009-3	BAM 1020	N	N	0.88	0.687596	0.84	103
Waterloo, Water Tower	11	19-013-0009-4	BAM 1020	N	N	0.89	1.7255569	0.95	114
Clinton, Chancy Park	12	19-045-0019-3	T640	Y	N	1.026	2.1102307	0.93	328
Viking Lake State Park	13	19-137-0002-4	BAM 1020	N	N	0.846	0.891897	0.92	111
Emmetsburg, Iowa Lakes College	14	19-147-1002-3	BAM 1020	N	N	0.707	1.8479879	0.89	92
Emmetsburg, Iowa Lakes College	15	19-147-1002-4	BAM 1020	N	N	0.768	1.7624699	0.83	90
Des Moines, Health Dept.	16	19-153-0030-4	BAM-1022	Y	N	0.901	-0.562459	0.94	356
Lake Sugema	17	19-177-0006-3	BAM 1020	N	N	0.83	1.3784693	0.95	107
Viking Lake State Park	18	19-137-0002-3	BAM 1020	N	N	0.896	-0.717907	0.90	111
Muscatine HS, East Campus Trailer	19	19-139-0019-4	BAM 1020	N	N	0.789	1.3667499	0.92	341
Lake Sugema	20	19-177-0006-4	BAM 1020	N	N	0.743	2.3201146	0.89	104

Table K.1 2022 Continuous PM_{2.5} Monitor Performance Relative to the PM_{2.5} Class III Criteria.

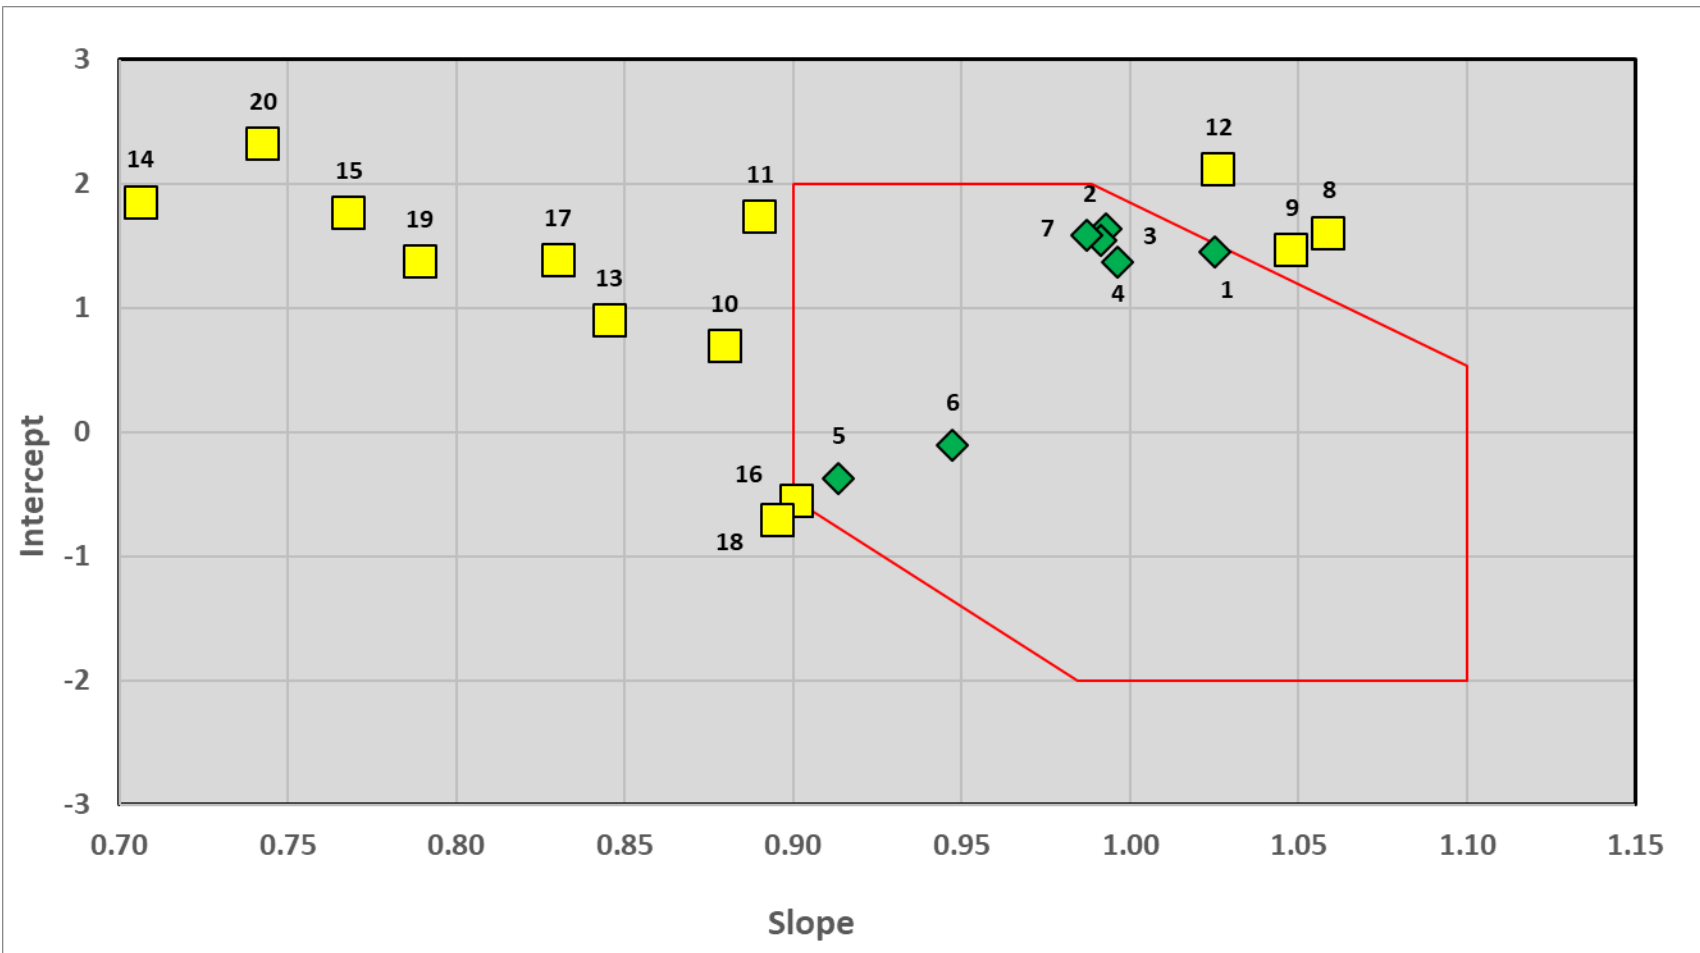


Figure K.2 2022 Continuous PM_{2.5} Monitor Performance Relative to the Slope and Intercept Criteria in Part 53.

PM_{10-2.5} Network Analysis

There are currently no PQAQO collocation requirements for PM_{10-2.5}. The Iowa network contains three PQAQO’s, corresponding to the Polk, Linn, and SHL networks and the networks operate 1, 1, and 4 sites respectively. Each of the PQAQO’s operates one collocated PM_{10-2.5} site.

PM₁₀ Network Analysis

EPA regulations require collocation at 15 percent (or at least one) of the monitoring sites within a PQAQO. The Iowa network contains three PQAQO’s, corresponding to the Polk, Linn and SHL networks. Since the SHL network contains 6 FRM sites, 0.9 (rounding to 1) collocated site is required. For the Polk network (1 FRM site) and Linn network (1 FRM site), one collocated site meets the requirement.

Linn County operates a collocated monitor at its Public Health site. Polk County operates its collocated monitor at its Health Department site. SHL operates a collocated pair of filter samplers at its NCORE site as well as the Holcim Cement site in Mason City.

According to EPA regulations, “Fifty percent of the collocated quality control monitors should be deployed at sites with daily concentrations estimated to be within plus or minus 20 percent of the applicable NAAQS and the remainder at the PQAQOs discretion”. Based on data from the most recent 5 years, the only site in Iowa measuring daily concentration levels within 20 percent of the NAAQS (120 µg/m³ or more) is the Linwood Mining site in Buffalo, Iowa (see Table K.2) and it is currently collocated with FEMs.

PQAQO	AQS ID	Site Name	2018	2019	2020	2021	2022
SHL	191630017	Buffalo, Linwood Mining	123	127	154	115	131
SHL	191550009	Council Bluffs, Franklin School	83	48	95	59	63
SHL	190330018	Mason City, Holcim Cement	50	41	72	65	75
Linn	191130040	Cedar Rapids, Public Health	54	41	72	68	116
Polk	191530030	Des Moines, Health Dept.	48	49	79	68	72
SHL	191630015	Davenport, Jefferson Sch.	39	66	48	49	62
SHL	191390015	Muscatine HS, East Campus Roof	50	41	55	46	73
SHL	191770006	Keosauqua, Lake Sugema	52	40	36	56	47

Table K.2 Annual Daily Maximum Values for Iowa PM₁₀ Sites. All units are µg/m³. Shaded rows indicate that the site has collocated monitors.

EPA also indicates that “If an organization has no sites with daily concentrations within plus or minus 20 percent of the NAAQS, 50 percent of the collocated quality control monitors should be deployed at those sites with the daily mean concentrations among the highest for all sites in the network and the remainder at the PQAOs discretion.”

The Polk and Linn County PQAOs each operate one PM₁₀ site and both of these sites are collocated to meet EPA collocation requirements.

When multiple FRM/FEM monitors are operated simultaneously at a monitoring site, in the absence of EPA rules describing how the monitor data is to be aggregated to establish the site data, there is potential ambiguity in establishing the data capture and NAAQS attainment status at the site (Figure K.3). Owing to comparability issues between filter-based and continuous methods, the Department considers the FRM method (filter data) to be more suitable for making PM₁₀ attainment decisions than continuous methods. At Linwood Mining near Buffalo, SHL collects filters from the primary filter sampler (POC 2) to establish NAAQS attainment, and operates a collocated BAM (POC 3) for quality assurance purposes and an additional BAM (POC 5) for real-time AQI reporting. A comparison of each BAM relative to the FRM is displayed in Figure K.3. To compare the hourly POC3 and POC5 PM₁₀ values to the FRM (POC2), daily BAM averages were used, which included only those days with at least 18 valid hours (75%) out of the 24 possible hours.

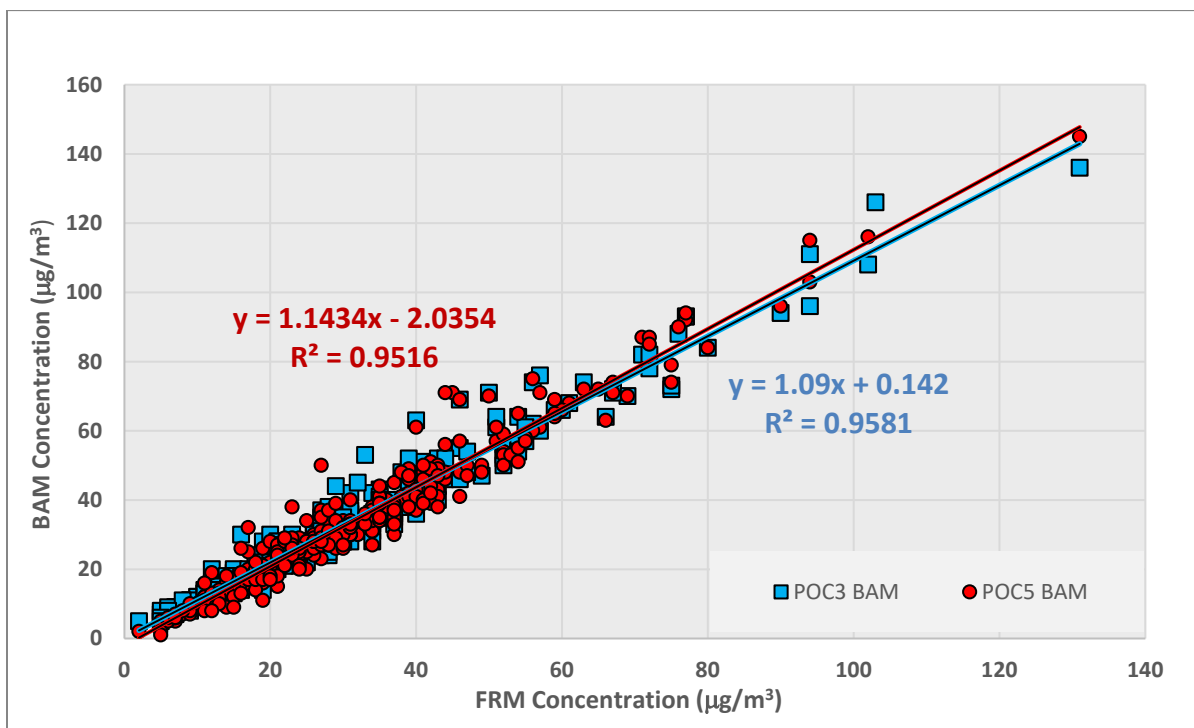


Figure K.3 Buffalo, Linwood Mining PM₁₀ BAMs vs FRM in 2022

SO₂, NO₂, CO Network Analysis


There are no federal requirements for collocated SO₂, NO₂ or CO monitoring, and there are no collocated monitors in the Iowa network for these criteria pollutants.

Lead Network Analysis


Iowa has only one Lead site and meets 40 CFR, Appendix A of Part 58, requirements by having one collocated monitor at this site.

Appendix L: Iowa Ambient Air Monitoring Network Maps


The following maps show the locations for the criteria pollutant monitors in the state of Iowa, which are current as of January 1, 2023. Non-criteria pollutant maps are also included for the continuous PM_{2.5} monitoring network and the Toxics and Speciation monitoring networks.

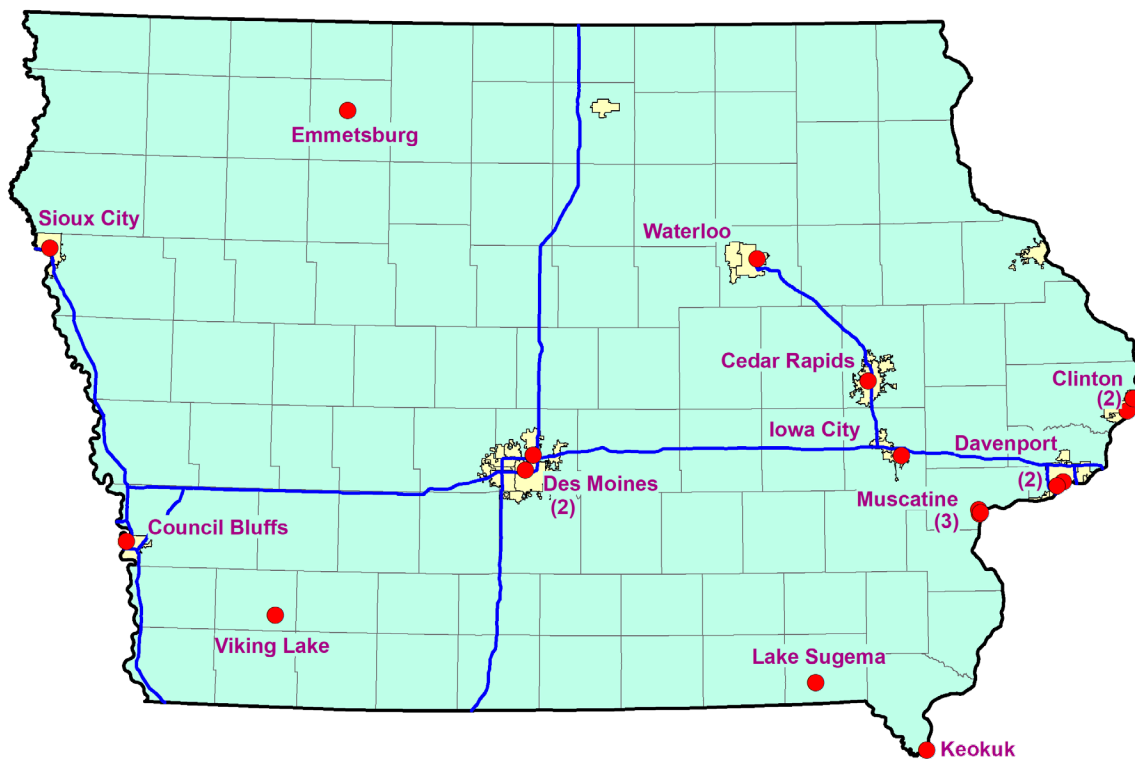


Manual PM_{2.5} (FRM) Monitoring Sites

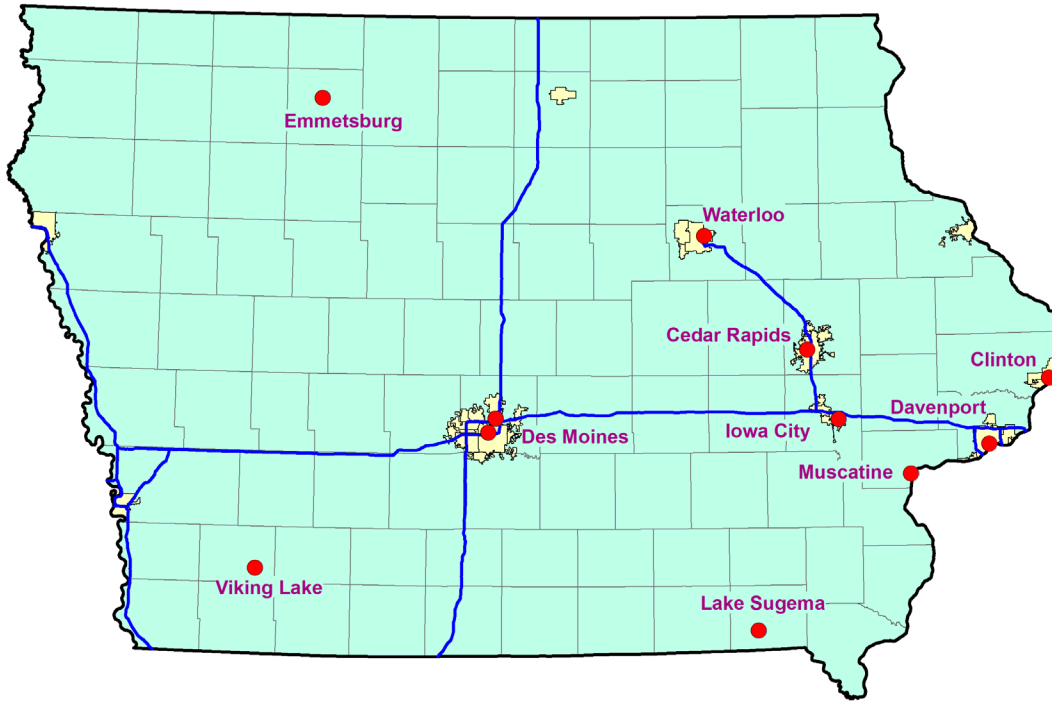


Continuous PM_{2.5} (non-FRM) Monitoring Sites

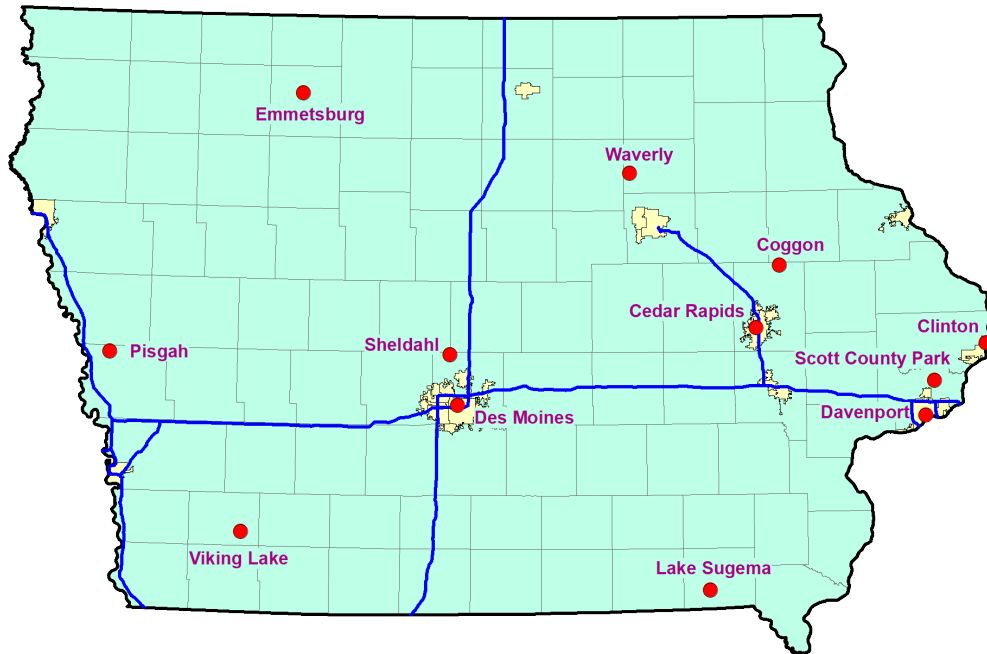


Ozone Monitoring Sites

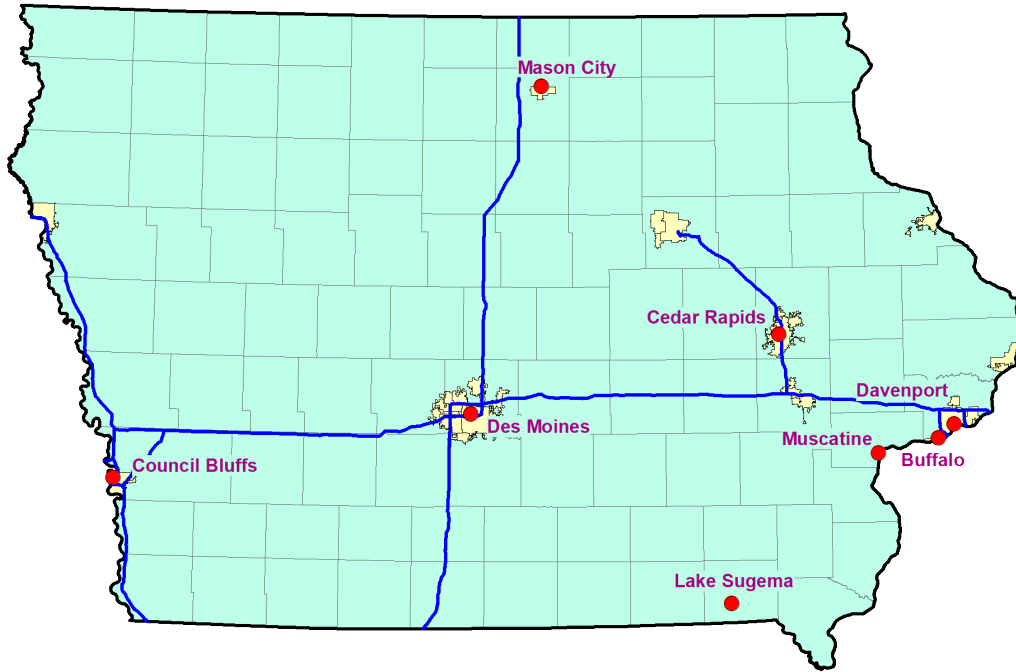


PM₁₀ Monitoring Sites

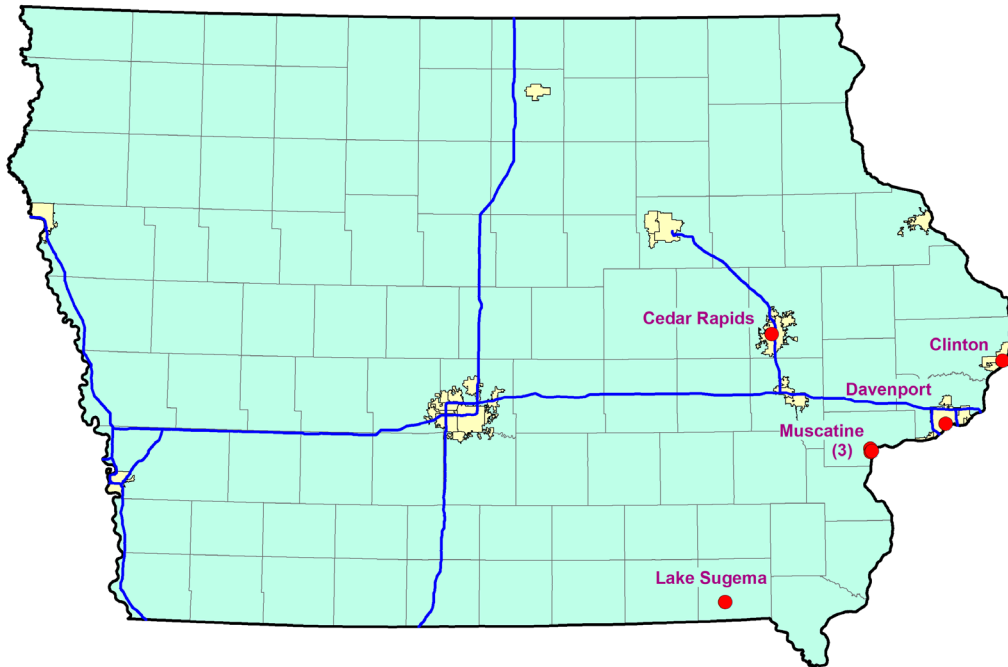


SO₂ Monitoring Sites

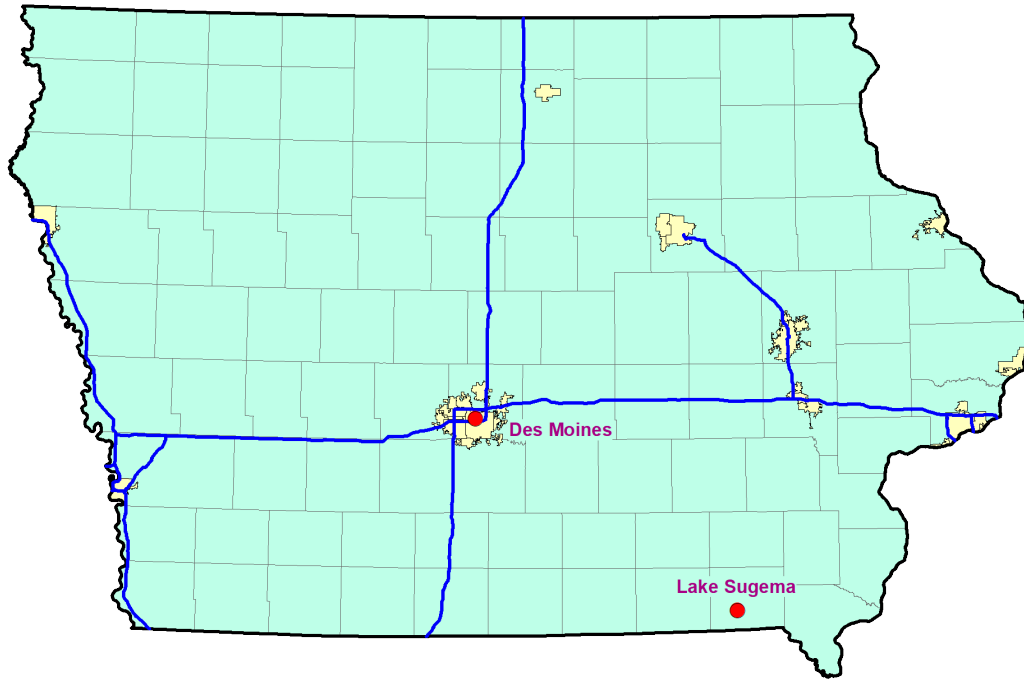


NO₂ Monitoring Sites

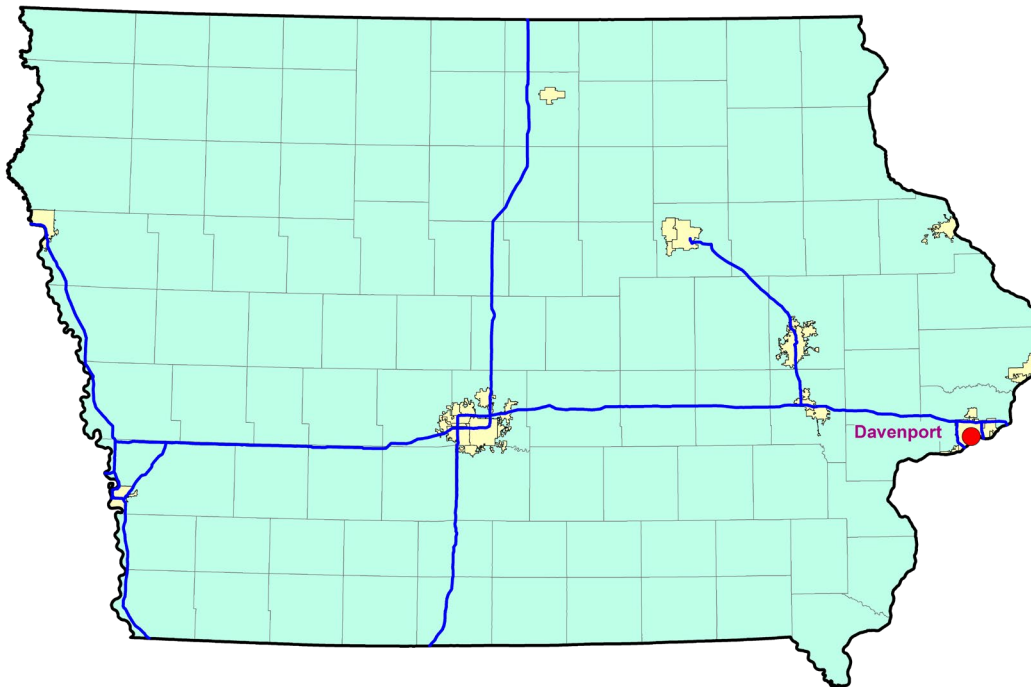


CO Monitoring Site

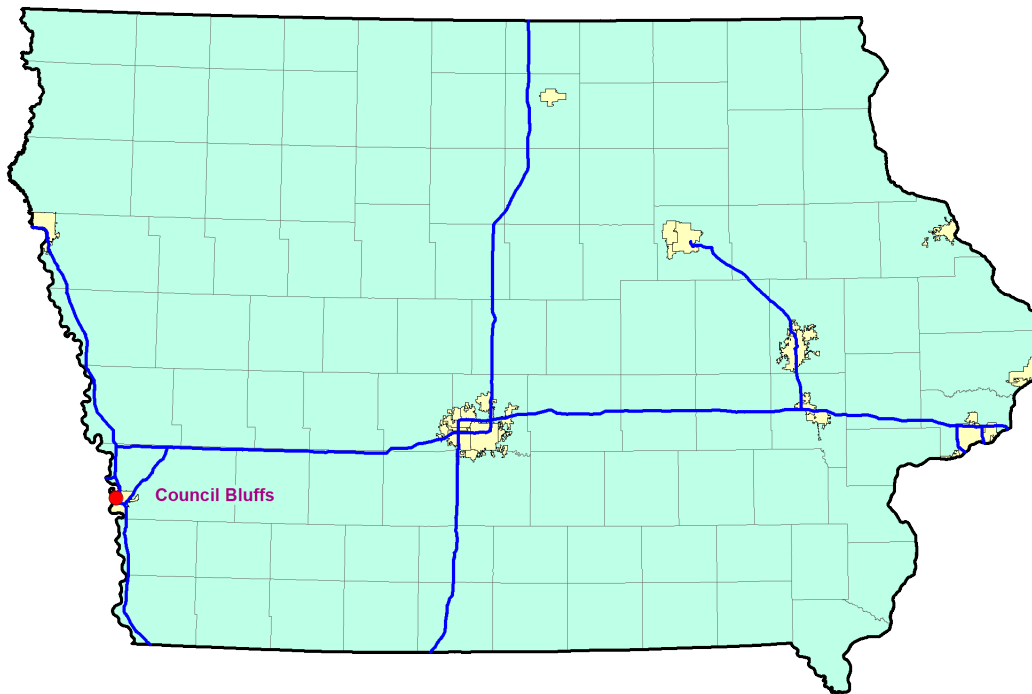

Lead (Pb) Monitoring Site

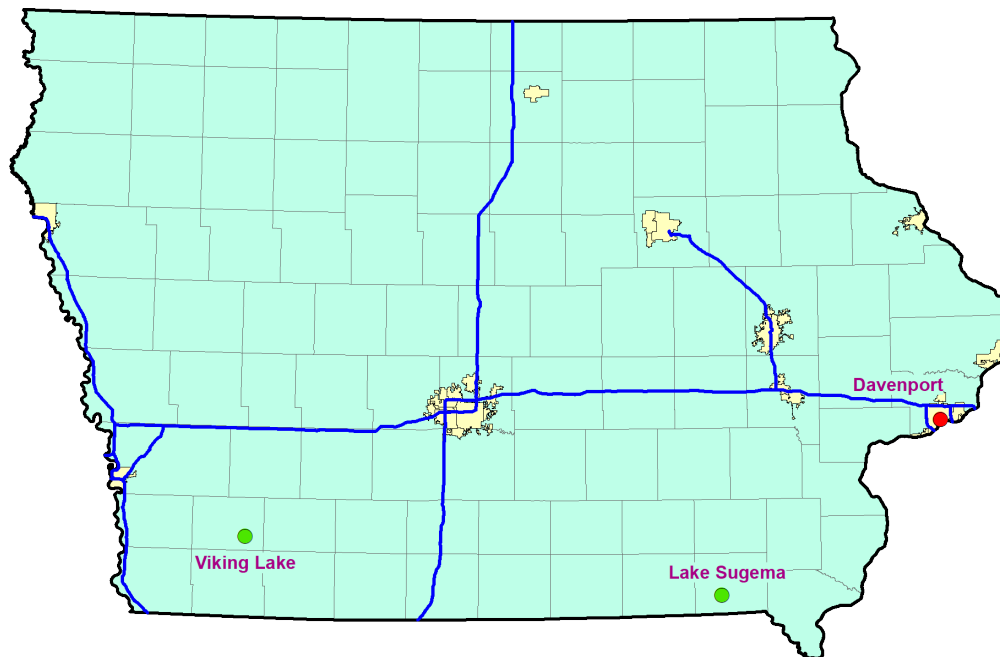

Speciation Monitoring Sites; CSN Speciation site is located at the red dot, IMPROVE speciation sites are located at the green dots.

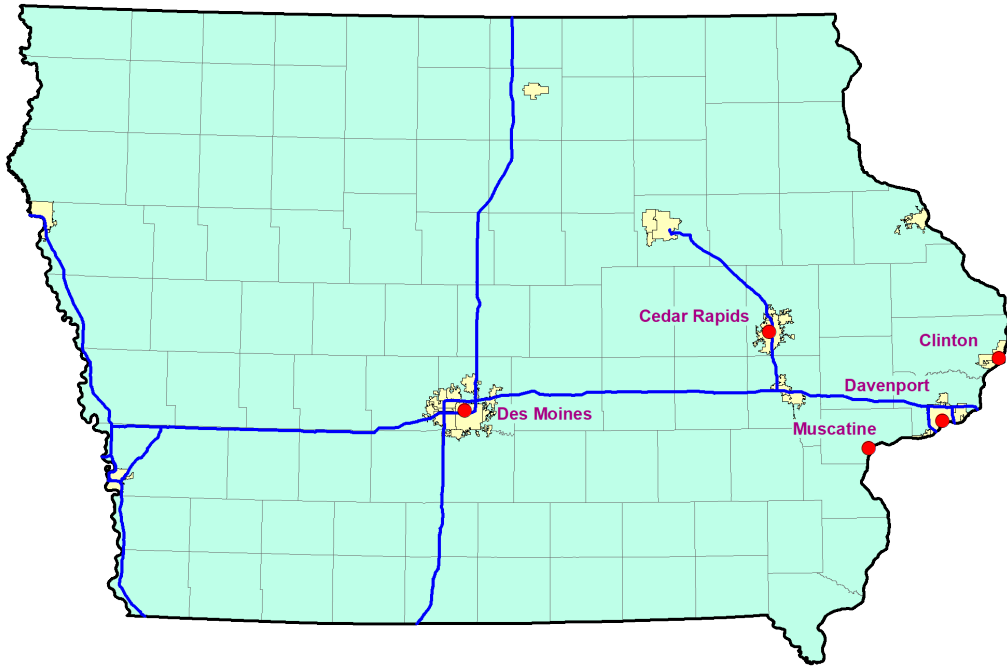

Toxics Monitoring Sites

Appendix M: Network Changes

Site Name	AQS ID	Pollutant	POC	Monitor Type	Sampling Method	Analysis	Operating Schedule	Primary Monitoring Objective	Spatial Scale	FRM / FEM	FRM/FEM Purpose	Action	Proposed Effective Date
Council Bluffs, Franklin School	191550009	PM10	1	SPM	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance	Delete	7/1/23
Davenport, Jefferson Sch.	191630015	NOy	2	NCORE	Chemiluminescence		Continuous	Population Exposure	Neighborhood	na		Delete	12/31/23
Davenport, Jefferson Sch.	191630015	NO2	1	NCORE	Chemiluminescence		Continuous	Population Exposure	Neighborhood	Yes		Add	12/31/23
Keokuk, Fire Station	191110008	PM2.5	1	SPM	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance	Delete	7/1/23
Lake Sugema	191770006	IMPROVE Speciation	1	IMPROVE	IMPROVE Sampler	IMPROVE Protocol	1 in 3	General / Background	Regional	na		Delete	7/1/23
Mason City, Holcim Cement	190330018	PM10	1	SPM	Low Volume FRM	Gravimetric	1 in 3	Source Oriented	Middle	Yes	NAAQS Compliance	Delete	7/1/23
Mason City, Holcim Cement	190330018	PM10	2	SPM	Low Volume FRM	Gravimetric	1 in 6	Source Oriented	Middle	Yes	QA NAAQS Compliance*	Delete	7/1/23
Muscatine HS, East Campus Roof	191390015	PM10	1	SPM	Low Volume FRM	Gravimetric	1 in 3	Population Exposure	Neighborhood	Yes	NAAQS Compliance	Delete	7/1/23
Muscatine, Greenwood Cemetery	191390016	SO2	1	SPM	UV Fluorescent		Continuous	Population Exposure	Neighborhood	Yes	NAAQS Compliance	Delete	7/1/23
Sioux City, To Be Determined (TBD)	TBD	Ozone	1	SLAMS	UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	NAAQS Compliance	Add	3/1/2024
Sioux City, TBD	TBD	Ozone	2	SLAMS	UV Absorption		Continuous	Max Ozone Concentration	Urban	Yes	QA Real-Time AQI Reporting*	Add	3/1/2024
Viking Lake State Park	191370002	IMPROVE Speciation	1	IMPROVE	IMPROVE Sampler	IMPROVE Protocol	1 in 3	General / Background	Regional	na		Delete	7/1/23


Table M-1: Iowa Network Changes (See [Appendix D](#) for definitions of the elements in this table.)

Changes to the SPM network do not require concurrence from EPA (40 CFR 58.20(f)). However, for completeness, deletion of SPM monitors, as presented in Table M-1, is discussed here. The DNR feels that these reductions in the network are necessary to accommodate declining budgets and to align with state monitoring objectives.

Discontinuing Council Bluffs, Franklin School (191550009) and Muscatine High School (191390015) PM₁₀ monitors:

Federal requirements for PM₁₀ that are based on both population and concentration levels, indicate that one to two PM₁₀ sites are required for the Omaha MSA. Currently three SLAMS PM₁₀ sites are operated by Nebraska in the Omaha MSA, but one site in Cass County is source oriented and Nebraska does not consider it representative of the MSA. Nebraska also provides real-time PM₁₀ data for the Omaha-Council Bluffs MSA. Although the Franklin School site is Iowa's only PM₁₀ monitor in the Omaha MSA, EPA requirements for PM₁₀ monitoring will continue to be met after the discontinuation of this monitor. Iowa will continue to operate collocated FRM PM_{2.5} monitors at the same site.


There are no federal requirements for PM₁₀ monitoring in Muscatine. The highest daily value for each of the last five years from both sites is presented in the chart below, relative to the 150 ug/m³ National Ambient Air Quality Standard (NAAQS).

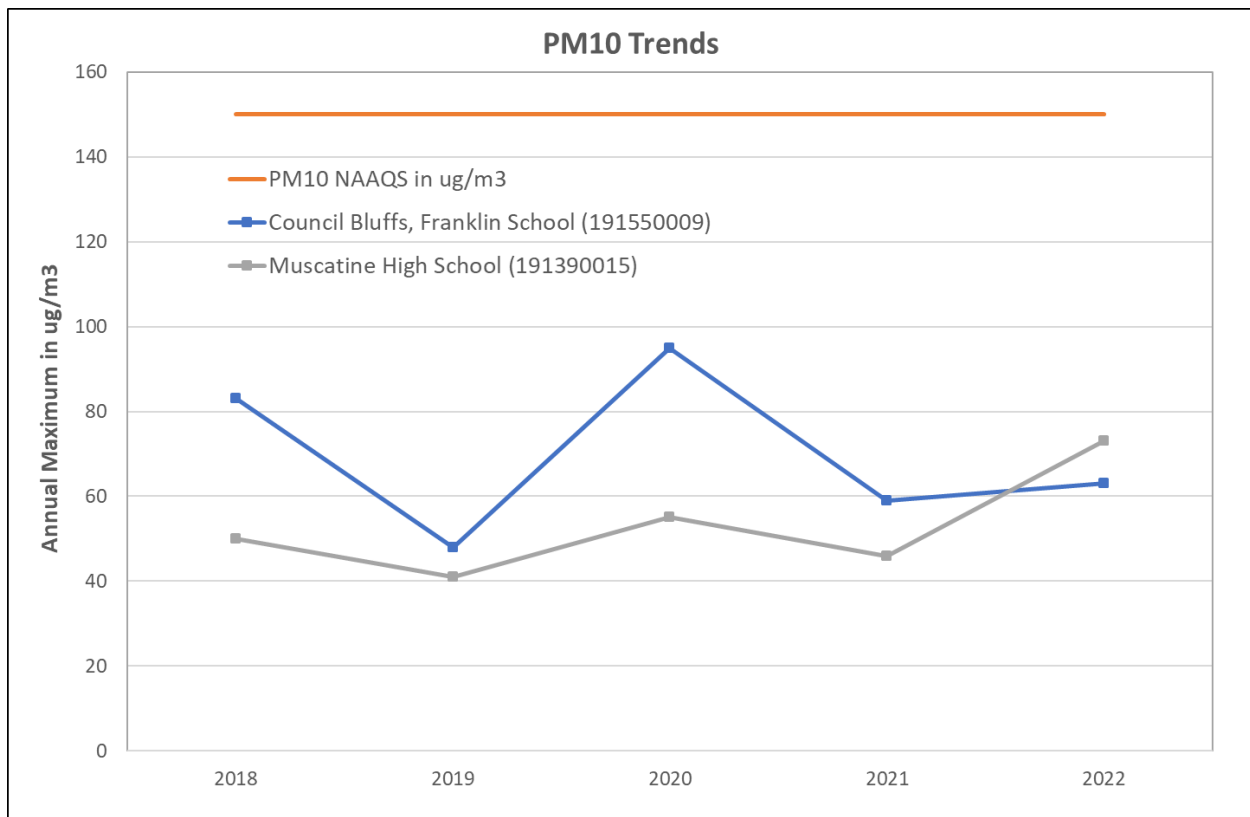

Discontinuing Collocated Mason City, Holcim PM₁₀ monitors (190330018):

This site is located on property owned by the Holcim cement plant. A few years ago, Holcim indicated the DNR may need to leave the site because of a pending sale, but the sale was not finalized. Within the last year, the Holcim cement facility underwent a permanent shut down. The Lehigh cement plant continues to operate. These monitors are characterized as source orientated middle scale. Middle scale defines the concentration typical of areas up to several city blocks in size with dimensions ranging from about 100 meters to 0.5 kilometer. As demonstrated in the aerial photo below, the distance to Lehigh is in the range of 0.9 to 1.4 km, exceeding the 0.5 km maximum range applicable to middle scale. These monitors are therefore categorized in such a way that they are not applicable to the Lehigh plant.


The center of the still operational Lehigh Cement plant is 0.88 miles (1.42 km) from the monitor.

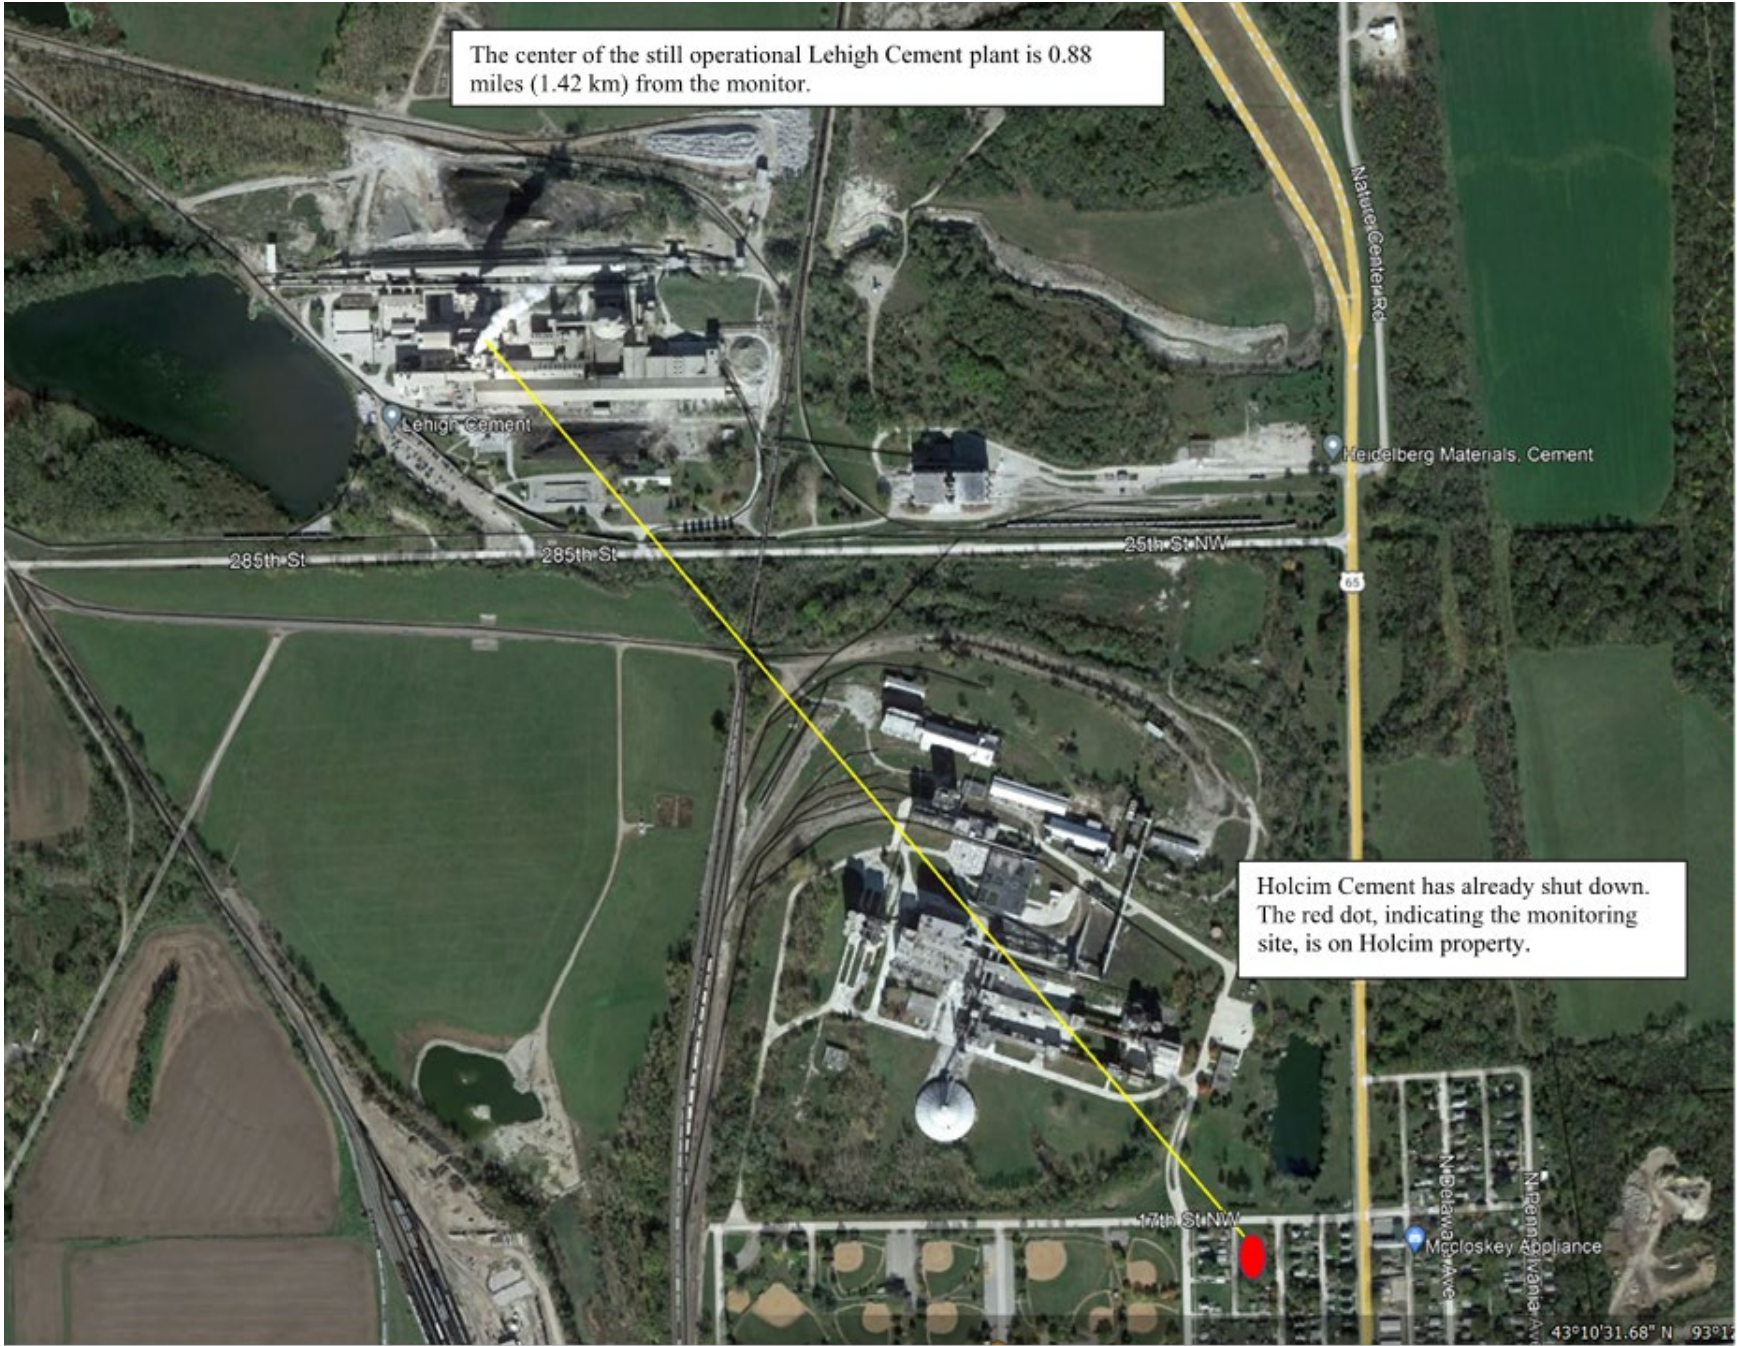

Holcim Cement has already shut down. The red dot, indicating the monitoring site, is on Holcim property.

43°10'31.68" N 93°12'



As demonstrated in the graph below, PM₁₀ annual maximum values from 2015 to 2022 at this site have been well below the standard:

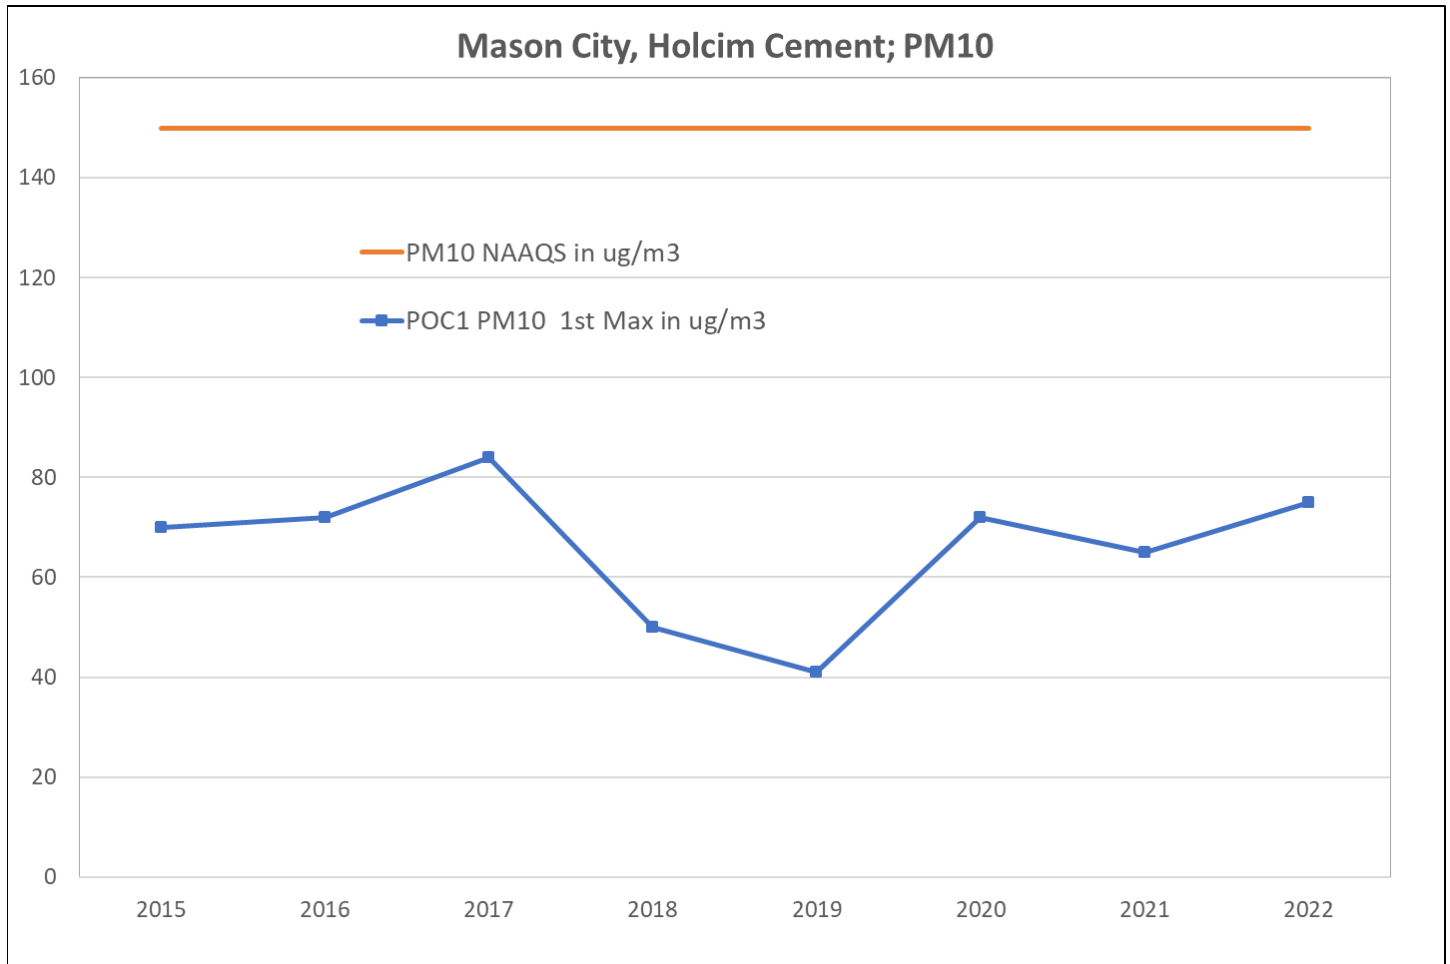

As discussed in [Appendix K](#), even prior to the planned discontinuation of three PM₁₀ monitoring sites on 7/31/23, the SHL network was only required to have one collocated PM₁₀ site. After discontinuation of the collocated PM₁₀ monitors in Mason City, SHL will continue to operate collocated PM₁₀ monitors at their Davenport N CORE site and at the Linwood site in Buffalo. Because of the elevated PM₁₀ levels recorded at the Linwood site in Buffalo, one of the collocated sites in the SHL network must continue to be the Buffalo PM₁₀ site. The SHL PM₁₀ network will continue to meet EPA requirements for collocated samplers after the planned PM₁₀ network changes have been implemented.


Discontinuing the Keokuk Fire Station PM_{2.5} monitor (191110008):

There are no federal requirements for PM_{2.5} monitoring in Keokuk. As indicated in the plots below, the five most recent PM_{2.5} design values at this site are all below the current 24 hour and annual standards.

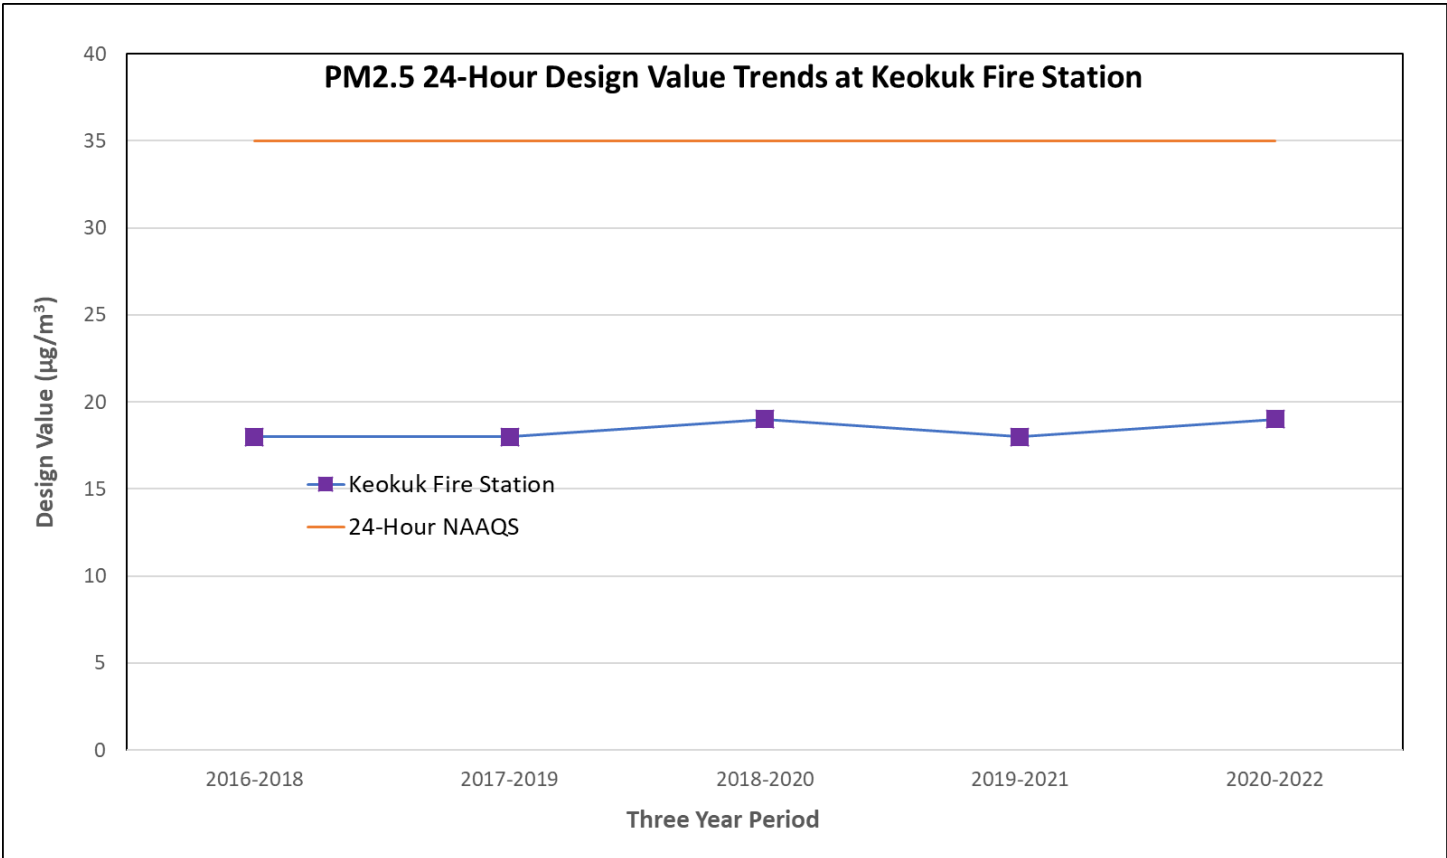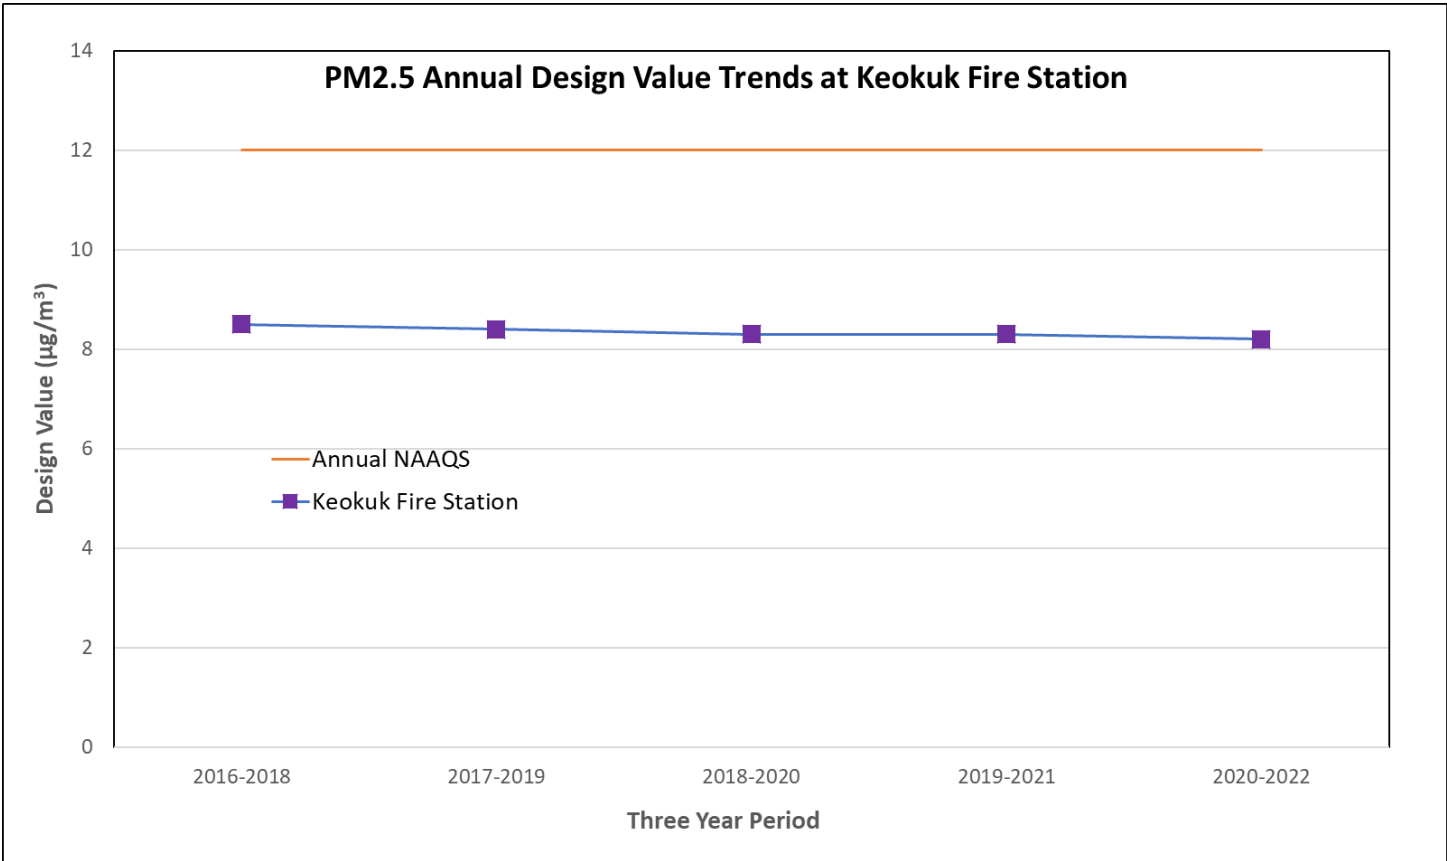

Discontinuing the Muscatine Greenwood Cemetery SO₂ monitor (191390016):

The Greenwood Cemetery site is one of three SO₂ sites operated by the DNR in Muscatine. As shown in the graph below, this site typically has a lower design value than both the East Campus High School and Musser Park sites in Muscatine. The last five 3-year design values from all three Muscatine sites are less than 50% of the NAAQS. As part of the 1-hour SO₂ nonattainment strategy significant reductions in SO₂ emissions were made at Grain Processing Corporation, Muscatine Power and Water, and Bayer. This included a fuel conversion (switching from coal to natural gas) and other process changes. After these changes, 1-hour SO₂ concentrations in the Muscatine area decreased. The 1-hour SO₂ design values somewhat lag in reflecting implementation of these strategies because they include data across 3-year periods. On account of the lower levels the DNR concluded that this site is redundant with the other two, and no longer needed.

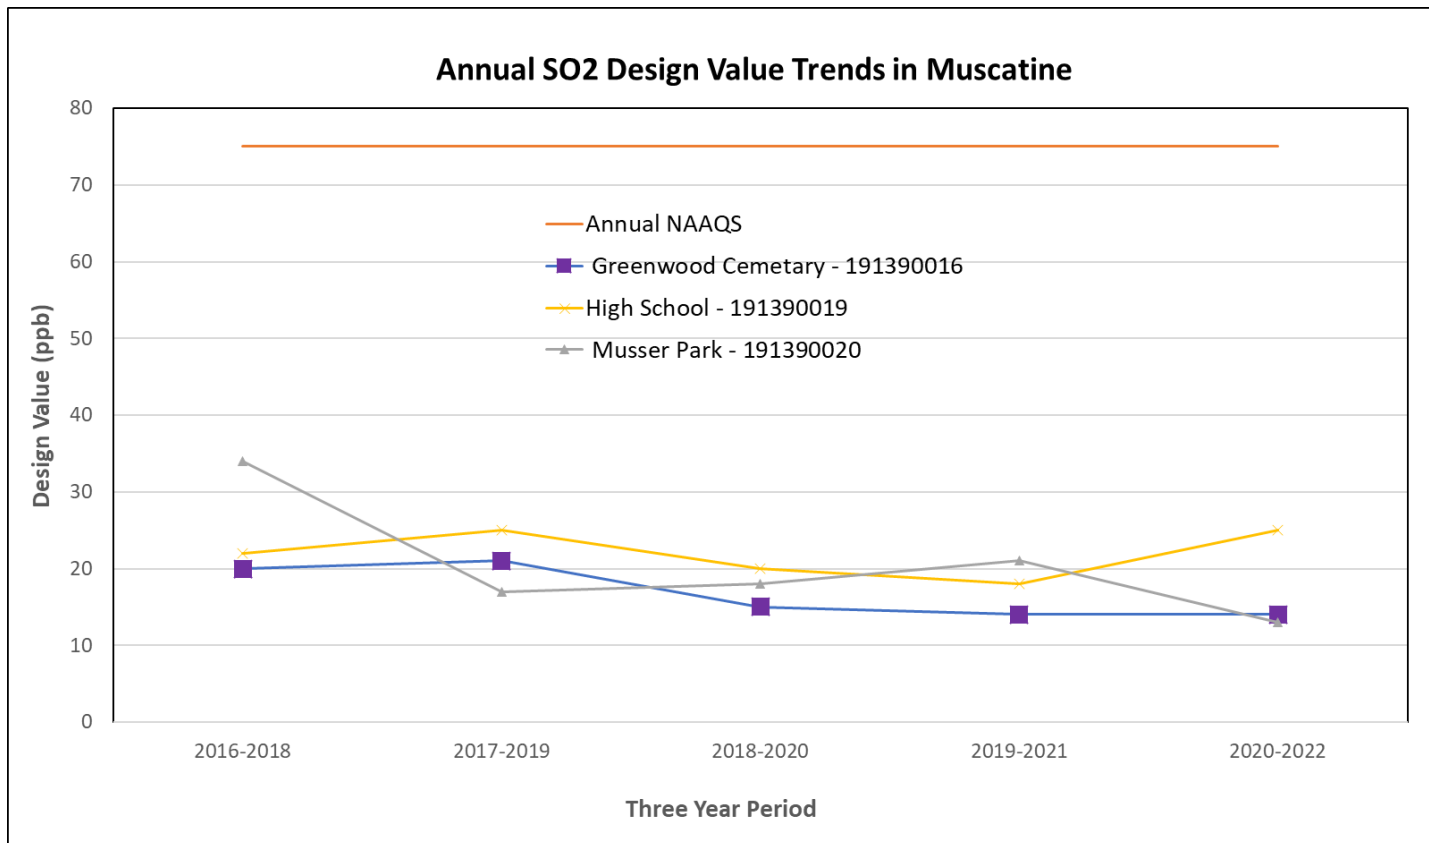

Discontinuing of the Viking Lake (191370002) and Lake Sugema (191770006) IMPROVE monitors:

Iowa currently operates two SPM monitoring sites that are part of the IMPROVE network. An assessment of the Chemical Speciation Network (CSN) and Interagency Monitoring of PROTECTED Visual Environments (IMPROVE) protocol networks was completed in 2015.⁵⁷ Primary Objectives Scores were developed as an indicator of the value and importance of each CSN and IMPROVE site. While the Primary Objectives Scores ranged between 0 and 23, both of these sites were ranked at zero (i.e. on the least important end of the spectrum). The Lake Sugema site is on the same (eastern) side of the state as Iowa's NCORE Chemical Speciation site in Davenport. Similarly, the Viking Lake site is on the same (western) side of the state as Nebraska's NCORE Chemical Speciation site in Omaha. Because of the overlap in the suite of analytes collected by both the CSN and IMPROVE protocols, and the relative regional proximity of these CSN and

⁵⁷ [CSN and IMPROVE Network Assessment](#)

IMPROVE sites, the DNR believes their ongoing operation is no longer warranted. The DNR plans to decommission both IMPROVE sites on 7/1/2023.

As indicated in an earlier section of this plan ([PM_{2.5} Monitoring Network Analysis](#)) Iowa uses monitors that record PM_{2.5} without speciated analysis to meet CFR background requirements (Emmetsburg) and transport monitoring requirements (Lake Sugema and Viking Lake). At each of these three sites (Emmetsburg, Lake Sugema, and Viking Lake) we operate three “non-speciated” PM_{2.5} samplers: specifically, a SLAMs FRM, as well as two continuous SPM samplers. We do not plan to discontinue any of these nine “non-speciated” PM_{2.5} monitors.

Replacement of NCORE (191630015) NOy analyzer with a conventional NO₂ monitor:

40 CFR Part 58 Appendix D, Section 3, describes NCORE monitoring requirements, and reads as follows: “(1) Although the measurement of NOy is required in support of a number of monitoring objectives, available commercial instruments may indicate little difference in their measurement of NOy compared to the conventional measurement of NOx, particularly in areas with relatively fresh sources of nitrogen emissions. Therefore, in areas with negligible expected difference between NOy and NOx measured concentrations, the Administrator may allow for waivers that permit NOx monitoring to be substituted for the required NOy monitoring at applicable NCORE sites.”

On 5/2/2023 the DNR Director submitted a request to the EPA Regional Administrator to substitute NOx monitoring for NOy monitoring at our NCORE site in Davenport. DNR requests EPA approval to make this change on 12/31/2023.


Installation of an Ozone Site Downwind of Sioux City MSA:

The Sioux City MSA includes counties from the states of Iowa, South Dakota, and Nebraska who share the responsibility for federally required monitoring within the MSA. South Dakota operated a SLAMS ozone monitor in Union County at the UC#1 (46-127-0001) site since 2013, but the site has been discontinued, particularly ozone monitoring was discontinued at the end of ozone season in September 2021.


As stated in the [Ozone Monitoring Network Analysis section](#), one ozone monitoring site is required for the Sioux City MSA. The UC#1 site that was in operation in South Dakota’s Union County had monitors for PM₁₀, PM_{2.5}, SO₂, NO₂, and ozone. The UC#1 Site was operated as a SLAMS site, and from the South Dakota 2021 Network Plan, the 8-hr ozone design value was 93% of the NAAQS. In accordance with Table D-2 of 40 CFR Part 58, Appendix D, one ozone monitor is required to be operated for the MSA due to ozone levels measured at the UC#1 site being greater than 85% of the ozone NAAQS. The Iowa DNR learned of the discontinuation of the UC#1 site in April 2022.

EPA Region 7 has asked Iowa to assume the responsibility of siting the required ozone monitor for the Sioux City MSA. The DNR is currently investigating possible locations, however, no site license agreements have been finalized at this point. The DNR intends to prepare a site and have utilities connected before the winter of 2023-2024, and begin operation at the start of the next ozone season (March 1, 2024).

Appendix N: 2022 Design Value Maps for PM_{2.5}

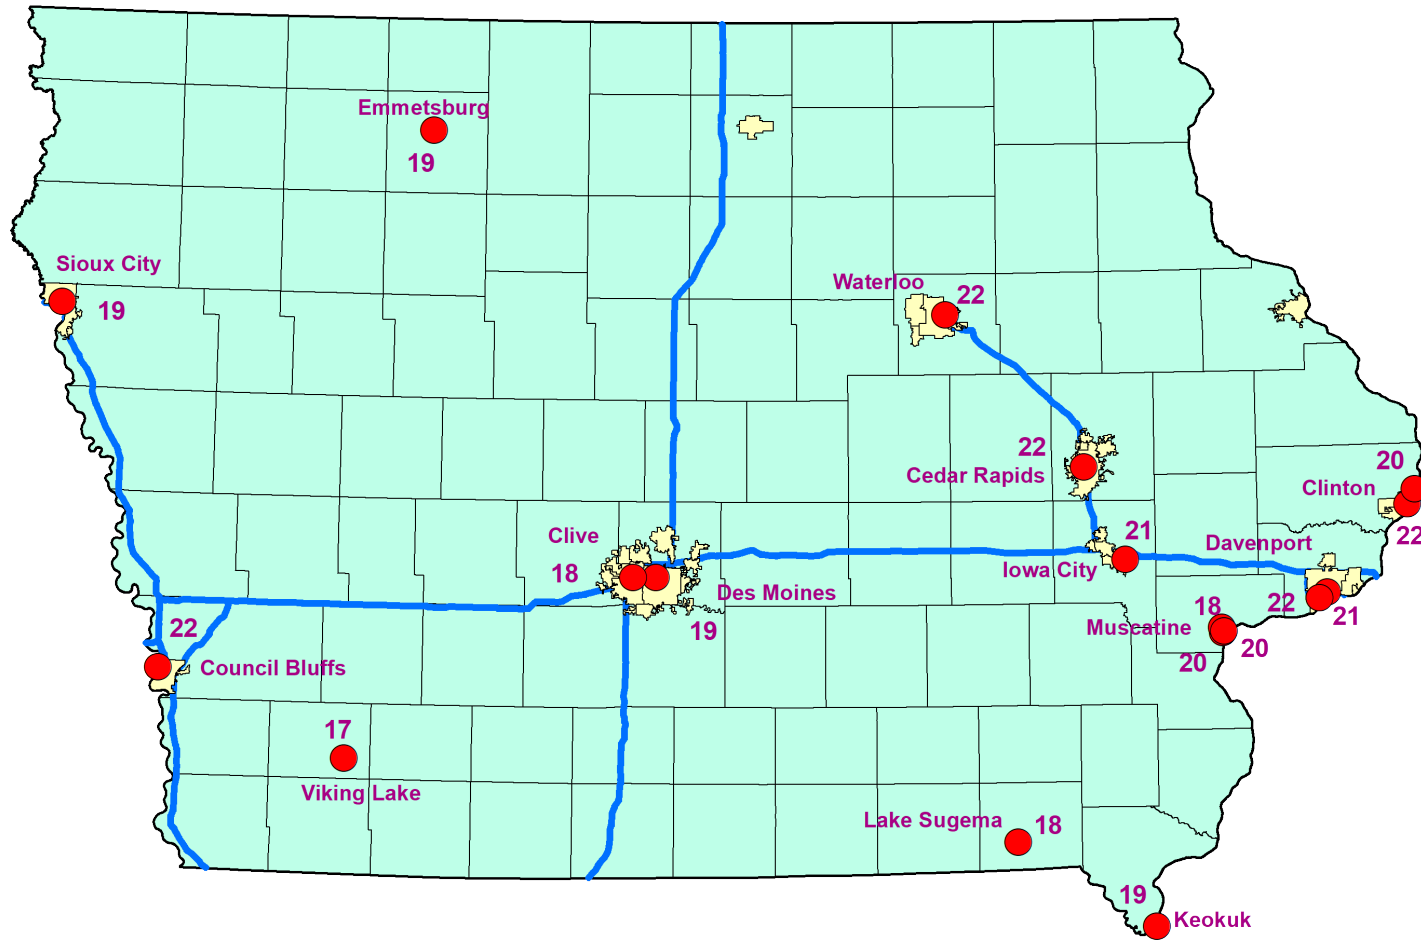

2020-2022 PM_{2.5} 24-hr Design Values ($\mu\text{g}/\text{m}^3$) Source: EPA Design Value Report (AMP 480) 4/12/23. (The National Ambient Air Quality 24 hour Standard for PM_{2.5} is 35 $\mu\text{g}/\text{m}^3$.)

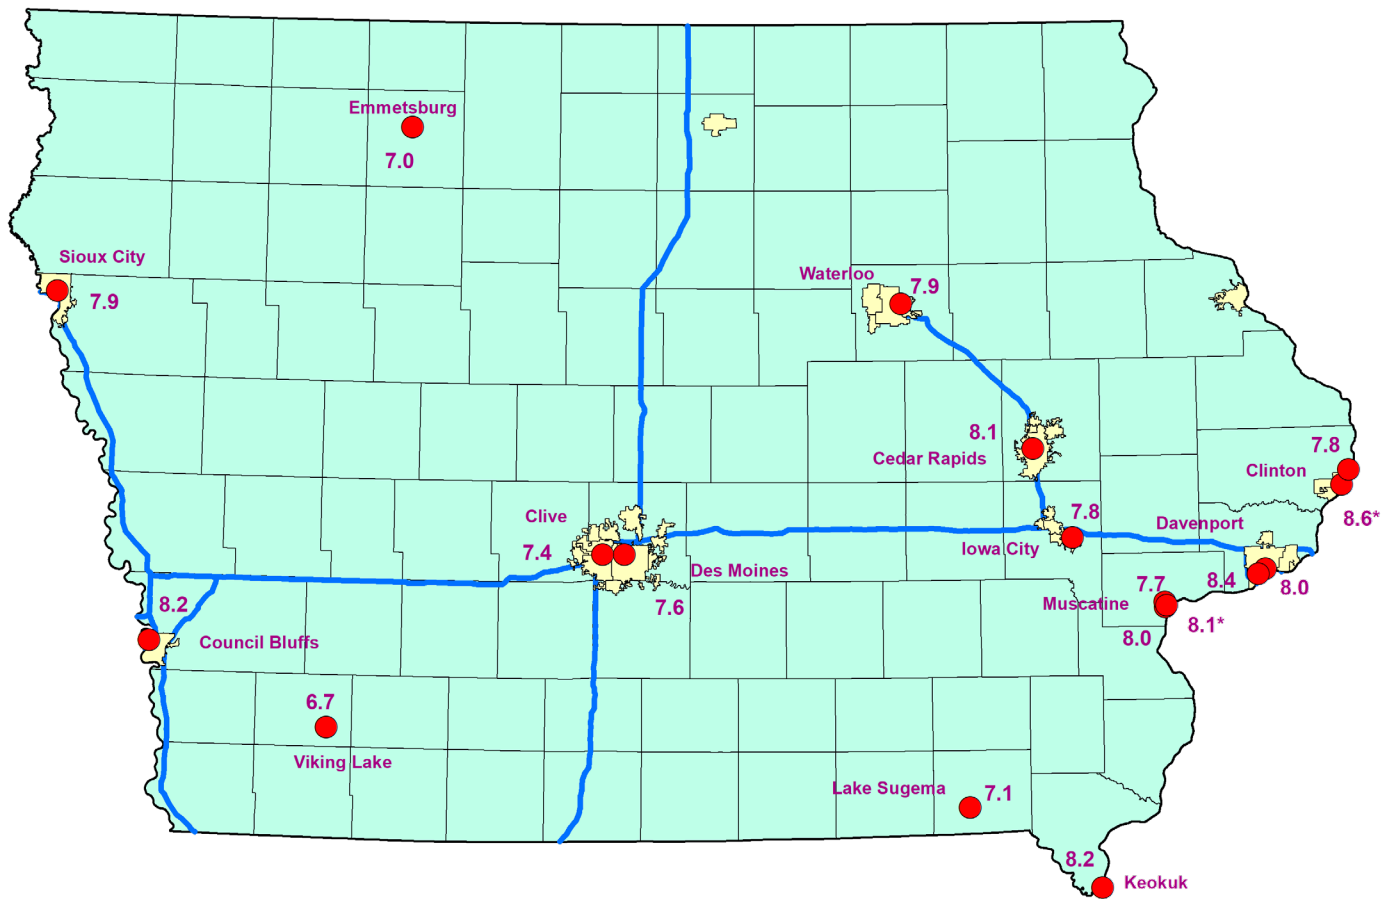

2020-2022 PM_{2.5} Annual Design Values (μg/m³) Source: EPA Design Value Report (AMP 480) 4/12/23

Note: Asterisks indicate source-oriented sites where the annual NAAQS does not apply. (The National Ambient Air Quality annual Standard for PM_{2.5} is 12 μg/m³.)

Appendix O: Federal Requirements for NCore Sites

40 CFR Part 58 Appendix D, Section 3: Design Criteria for NCore Sites.

(a) Each State (i.e. the fifty States, District of Columbia, Puerto Rico, and the Virgin Islands) is required to operate at least one NCore site. States may delegate this requirement to a local agency. States with many MSAs often also have multiple air sheds with unique characteristics and, often, elevated air pollution. These States include, at a minimum, California, Florida, Illinois, Michigan, New York, North Carolina, Ohio, Pennsylvania, and Texas. These States are required to identify one to two additional NCore sites in order to account for their unique situations. These additional sites shall be located to avoid proximity to large emission sources. Any State or local agency can propose additional candidate NCore sites or modifications to these requirements for approval by the Administrator. The NCore locations should be leveraged with other multipollutant air monitoring sites including PAMS sites, National Air Toxics Trends Stations (NATTS) sites, CASTNET sites, and STN sites. Site leveraging includes using the same monitoring platform and equipment to meet the objectives of the variety of programs where possible and advantageous.

(b) The NCore sites must measure, at a minimum, PM_{2.5} particle mass using continuous and integrated/filter-based samplers, speciated PM_{2.5}, PM_{10-2.5} particle mass, O₃, SO₂, CO, NO/NO_y, wind speed, wind direction, relative humidity, and ambient temperature.

(1) Although the measurement of NO_y is required in support of a number of monitoring objectives, available commercial instruments may indicate little difference in their measurement of NO_y compared to the conventional measurement of NO_x, particularly in areas with relatively fresh sources of nitrogen emissions. Therefore, in areas with negligible expected difference between NO_y and NO_x measured concentrations, the Administrator may allow for waivers that permit NO_x monitoring to be substituted for the required NO_y monitoring at applicable NCore sites.

(2) The EPA recognizes that, in some cases, the physical location of the NCore site may not be suitable for representative meteorological measurements due to the site's physical surroundings. It is also possible that nearby meteorological measurements may be able to fulfill this data need. In these cases, the requirement for meteorological monitoring can be waived by the Administrator.

(c) [Reserved]

(d) Siting criteria are provided for urban and rural locations. Sites with significant historical records that do not meet siting criteria may be approved as NCore by the Administrator. Sites with the suite of NCore measurements that are explicitly designed for other monitoring objectives are exempt from these siting criteria (e.g., a near-roadway site).

(1) Urban NCore stations are to be generally located at urban or neighborhood scale to provide representative concentrations of exposure expected throughout the metropolitan area; however, a middle-scale site may be acceptable in cases where the site can represent many such locations throughout a metropolitan area.

(2) Rural NCore stations are to be located to the maximum extent practicable at a regional or larger scale away from any large local emission source, so that they represent ambient concentrations over an extensive area.

Appendix P: Federal Requirements for Near-Road Sites

40 CFR Part 58 Appendix D—Network Design Criteria for Ambient Air Quality Monitoring

4.2 Carbon Monoxide (CO) Design Criteria

4.2.1 General Requirements. (a) Except as provided in subsection (b), one CO monitor is required to operate collocated with one required near-road NO₂ monitor, as required in Section 4.3.2 of this part, in CBSAs having a population of 1,000,000 or more persons. If a CBSA has more than one required near-road NO₂ monitor, only one CO monitor is required to be collocated with a near-road NO₂ monitor within that CBSA.

(b) If a state provides quantitative evidence demonstrating that peak ambient CO concentrations would occur in a near-road location which meets microscale siting criteria in Appendix E of this part but is not a near-road NO₂ monitoring site, then the EPA Regional Administrator may approve a request by a state to use such an alternate near-road location for a CO monitor in place of collocating a monitor at near-road NO₂ monitoring site.

...

Appendix D to Part 58—Network Design Criteria for Ambient Air Quality Monitoring

4.3 Nitrogen Dioxide (NO₂) Design Criteria

4.3.1 General Requirements

(a) State and, where appropriate, local agencies must operate a minimum number of required NO₂ monitoring sites as described below.

4.3.2 Requirement for Near-road NO₂ Monitors

(a) Within the NO₂ network, there must be one microscale near-road NO₂ monitoring station in each CBSA with a population of 1,000,000 or more persons to monitor a location of expected maximum hourly concentrations sited near a major road with high AADT counts as specified in paragraph 4.3.2(a)(1) of this appendix. An additional near-road NO₂ monitoring station is required for any CBSA with a population of 2,500,000 persons or more, or in any CBSA with a population of 1,000,000 or more persons that has one or more roadway segments with 250,000 or greater AADT counts to monitor a second location of expected maximum hourly concentrations. CBSA populations shall be based on the latest available census figures.

(1) The near-road NO₂ monitoring sites shall be selected by ranking all road segments within a CBSA by AADT and then identifying a location or locations adjacent to those highest ranked road segments, considering fleet mix, roadway design, congestion patterns, terrain, and meteorology, where maximum hourly NO₂ concentrations are expected to occur and siting criteria can be met in accordance with appendix E of this part. Where a state or local air monitoring agency identifies multiple acceptable candidate sites where maximum hourly NO₂ concentrations are expected to occur, the monitoring agency shall consider the potential for population exposure in the criteria utilized to select the final site location. Where one CBSA is required to have two near-road NO₂ monitoring stations, the sites shall be differentiated from each other by one or more of the following factors: fleet mix; congestion patterns; terrain; geographic area within the CBSA; or different route, interstate, or freeway designation.

(b) Measurements at required near-road NO₂ monitor sites utilizing chemiluminescence FRMs must include at a minimum: NO, NO₂, and NO_x.

4.3.3 Requirement for Area-wide NO₂ Monitoring

- (a) Within the NO₂ network, there must be one monitoring station in each CBSA with a population of 1,000,000 or more persons to monitor a location of expected highest NO₂ concentrations representing the neighborhood or larger spatial scales. PAMS sites collecting NO₂ data that are situated in an area of expected high NO₂ concentrations at the neighborhood or larger spatial scale may be used to satisfy this minimum monitoring requirement when the NO₂ monitor is operated year round. Emission inventories and meteorological analysis should be used to identify the appropriate locations within a CBSA for locating required area-wide NO₂ monitoring stations. CBSA populations shall be based on the latest available census figures.

4.3.4 Regional Administrator Required Monitoring

- (a) The Regional Administrators, in collaboration with States, must require a minimum of forty additional NO₂ monitoring stations nationwide in any area, inside or outside of CBSAs, above the minimum monitoring requirements, with a primary focus on siting these monitors in locations to protect susceptible and vulnerable populations. The Regional Administrators, working with States, may also consider additional factors described in paragraph (b) below to require monitors beyond the minimum network requirement.
- (b) The Regional Administrators may require monitors to be sited inside or outside of CBSAs in which:
 - (i) The required near-road monitors do not represent all locations of expected maximum hourly NO₂ concentrations in an area and NO₂ concentrations may be approaching or exceeding the NAAQS in that area;
 - (ii) Areas that are not required to have a monitor in accordance with the monitoring requirements and NO₂ concentrations may be approaching or exceeding the NAAQS; or
 - (iii) The minimum monitoring requirements for area-wide monitors are not sufficient to meet monitoring objectives.
- (c) The Regional Administrator and the responsible State or local air monitoring agency should work together to design and/or maintain the most appropriate NO₂ network to address the data needs for an area, and include all monitors under this provision in the annual monitoring network plan.

4.3.5 NO₂ Monitoring Spatial Scales

- (a) The most important spatial scale for near-road NO₂ monitoring stations to effectively characterize the maximum expected hourly NO₂ concentration due to mobile source emissions on major roadways is the microscale. The most important spatial scales for other monitoring stations characterizing maximum expected hourly NO₂ concentrations are the microscale and middle scale. The most important spatial scale for area-wide monitoring of high NO₂ concentrations is the neighborhood scale.
- (1) *Microscale*—This scale represents areas in close proximity to major roadways or point and area sources. Emissions from roadways result in high ground level NO₂ concentrations at the microscale, where concentration gradients generally exhibit a marked decrease with increasing downwind distance from

major roads. As noted in appendix E of this part, near-road NO₂ monitoring stations are required to be within 50 meters of target road segments in order to measure expected peak concentrations. Emissions from stationary point and area sources, and non-road sources may, under certain plume conditions, result in high ground level concentrations at the microscale. The microscale typically represents an area impacted by the plume with dimensions extending up to approximately 100 meters.

- (2) *Middle scale*—This scale generally represents air quality levels in areas up to several city blocks in size with dimensions on the order of approximately 100 meters to 500 meters. The middle scale may include locations of expected maximum hourly concentrations due to proximity to major NO₂ point, area, and/or non-road sources.
- (3) *Neighborhood scale*—The neighborhood scale represents air quality conditions throughout some relatively uniform land use areas with dimensions in the 0.5 to 4.0 kilometer range. Emissions from stationary point and area sources may, under certain plume conditions, result in high NO₂ concentrations at the neighborhood scale. Where a neighborhood site is located away from immediate NO₂ sources, the site may be useful in representing typical air quality values for a larger residential area, and therefore suitable for population exposure and trends analyses.
- (4) *Urban scale*—Measurements in this scale would be used to estimate concentrations over large portions of an urban area with dimensions from 4 to 50 kilometers. Such measurements would be useful for assessing trends in area-wide air quality, and hence, the effectiveness of large scale air pollution control strategies. Urban scale sites may also support other monitoring objectives of the NO₂ monitoring network identified in paragraph 4.3.4 above.

4.3.6 NO_y Monitoring

(a) NO/NO_y measurements are included within the NCore multi-pollutant site requirements and the PAMS program. These NO/NO_y measurements will produce conservative estimates for NO₂ that can be used to ensure tracking continued compliance with the NO₂ NAAQS. NO/NO_y monitors are used at these sites because it is important to collect data on total reactive nitrogen species for understanding O₃ photochemistry.

40 CFR Part 58 Appendix D—Network Design Criteria for Ambient Air Quality Monitoring

4.7 Fine Particulate Matter (PM_{2.5}) Design Criteria.

4.7.1 General Requirements.

...

(b)(2) For CBSAs with a population of 1,000,000 or more persons, at least one PM_{2.5} monitor is to be collocated at a near-road NO₂ station required in section 4.3.2(a) of this appendix.

Appendix Q: Highest PM₁₀ Values in Iowa MSAs 2020-2022

The following table shows the highest values recorded by PM₁₀ monitors in Iowa Metropolitan Statistical Areas, including those shared with Illinois, South Dakota and Nebraska.

Table D-4 of Appendix D to Part 58 of the Code of Federal Regulations, specifies different minimum monitoring requirements for PM₁₀, depending on whether the concentrations are high, medium, or low. High concentrations are defined as exceeding the PM₁₀ NAAQS by 20% or more (186 µg/m³ or greater). Medium levels are defined as concentrations exceeding 80% of the NAAQS (between 124 and 186 µg/m³). If ambient concentrations are less than 80% of the PM₁₀ NAAQS, the levels are characterized as low. These categories are reflected in the last column of the following table.

MSA	2020 Max (µg/m ³)	2021 Max (µg/m ³)	2022 Max (µg/m ³)	3-Yr Max (µg/m ³)	Category
Omaha-Council Bluffs, NE-IA	95	74	79	95	Low
Des Moines-West Des Moines, IA	79	68	72	79	Low
Davenport-Moline-Rock Island, IA-IL	154	115	131	154	Medium
Cedar Rapids, IA	72	68	116	116	Low
Sioux City, IA-NE-SD*	94	92	-	94	Low

PM₁₀ Values in MSAs (3-year maximum).

*The PM₁₀ monitor in this MSA was discontinued in 2021; see the South Dakota 2022 Network Plan.

Note: POC2 FRM values are used for the Buffalo, IA monitoring site. This site records the highest PM₁₀ values in the Davenport-Moline-Rock Island, IA-IL MSA. See discussion in [Appendix K](#). Maximum value data from source-oriented monitors in Cass County Nebraska were not used for determination of the classification of the Omaha-Council Bluffs MSA as Nebraska indicates the data is not representative of the levels in the Omaha MSA as a whole.

Source: [EPA Monitor Values Report](#)

Appendix R: Federal Requirements for SO₂ Sites

40 CFR Part 58 Appendix D — Network Design Criteria for Ambient Air Quality Monitoring

4.4 Sulfur Dioxide (SO₂) Design Criteria.

4.4.1 General Requirements. (a) State and, where appropriate, local agencies must operate a minimum number of required SO₂ monitoring sites as described below.

4.4.2 Requirement for Monitoring by the Population Weighted Emissions Index. (a) The population weighted emissions index (PWEI) shall be calculated by States for each core based statistical area (CBSA) they contain or share with another State or States for use in the implementation of or adjustment to the SO₂ monitoring network. The PWEI shall be calculated by multiplying the population of each CBSA, using the most current census data or estimates, and the total amount of SO₂ in tons per year emitted within the CBSA area, using an aggregate of the most recent county level emissions data available in the National Emissions Inventory for each county in each CBSA. The resulting product shall be divided by one million, providing a PWEI value, the units of which are million persons-tons per year. For any CBSA with a calculated PWEI value equal to or greater than 1,000,000, a minimum of three SO₂ monitors are required within that CBSA. For any CBSA with a calculated PWEI value equal to or greater than 100,000, but less than 1,000,000, a minimum of two SO₂ monitors are required within that CBSA. For any CBSA with a calculated PWEI value equal to or greater than 5,000, but less than 100,000, a minimum of one SO₂ monitor is required within that CBSA.

(1) The SO₂ monitoring site(s) required as a result of the calculated PWEI in each CBSA shall satisfy minimum monitoring requirements if the monitor is sited within the boundaries of the parent CBSA and is one of the following site types (as defined in section 1.1.1 of this appendix): population exposure, highest concentration, source impacts, general background, or regional transport. SO₂ monitors at NCore stations may satisfy minimum monitoring requirements if that monitor is located within a CBSA with minimally required monitors under this part. Any monitor that is sited outside of a CBSA with minimum monitoring requirements to assess the highest concentration resulting from the impact of significant sources or source categories existing within that CBSA shall be allowed to count towards minimum monitoring requirements for that CBSA.

4.4.3 Regional Administrator Required Monitoring. (a) The Regional Administrator may require additional SO₂ monitoring stations above the minimum number of monitors required in 4.4.2 of this part, where the minimum monitoring requirements are not sufficient to meet monitoring objectives. The Regional Administrator may require, at his/her discretion, additional monitors in situations where an area has the potential to have concentrations that may violate or contribute to the violation of the NAAQS, in areas impacted by sources which are not conducive to modeling, or in locations with susceptible and vulnerable populations, which are not monitored under the minimum monitoring provisions described above. The Regional Administrator and the responsible State or local air monitoring agency shall work together to design and/or maintain the most appropriate SO₂ network to provide sufficient data to meet monitoring objectives.

4.4.4 SO₂ Monitoring Spatial Scales. (a) The appropriate spatial scales for SO₂ SLAMS monitors are the microscale, middle, neighborhood, and urban scales. Monitors sited at the microscale, middle, and neighborhood scales are suitable for determining maximum hourly concentrations for SO₂. Monitors sited at urban scales are useful for identifying SO₂ transport, trends, and, if sited upwind of local sources, background concentrations.

(1) Microscale—This scale would typify areas in close proximity to SO₂ point and area sources. Emissions from stationary point and area sources, and non-road sources may, under certain plume conditions, result in high ground level concentrations at the microscale. The microscale typically represents an area impacted by the plume with dimensions extending up to approximately 100 meters.

(2) Middle scale—This scale generally represents air quality levels in areas up to several city blocks in size with dimensions on the order of approximately 100 meters to 500 meters. The middle scale may include locations of

expected maximum short-term concentrations due to proximity to major SO₂ point, area, and/or non-road sources.

(3) Neighborhood scale—The neighborhood scale would characterize air quality conditions throughout some relatively uniform land use areas with dimensions in the 0.5 to 4.0 kilometer range. Emissions from stationary point and area sources may, under certain plume conditions, result in high SO₂ concentrations at the neighborhood scale. Where a neighborhood site is located away from immediate SO₂ sources, the site may be useful in representing typical air quality values for a larger residential area, and therefore suitable for population exposure and trends analyses.

(4) Urban scale—Measurements in this scale would be used to estimate concentrations over large portions of an urban area with dimensions from 4 to 50 kilometers. Such measurements would be useful for assessing trends in area-wide air quality, and hence, the effectiveness of large scale air pollution control strategies. Urban scale sites may also support other monitoring objectives of the SO₂ monitoring network such as identifying trends, and when monitors are sited upwind of local sources, background concentrations.

4.4.5 NCore Monitoring. (a) SO₂ measurements are included within the NCore multipollutant site requirements as described in paragraph (3)(b) of this appendix. NCore-based SO₂ measurements are primarily used to characterize SO₂ trends and assist in understanding SO₂ transport across representative areas in urban or rural locations and are also used for comparison with the SO₂ NAAQS. SO₂ monitors at NCore sites that exist in CBSAs with minimum monitoring requirements per section 4.4.2 above shall be allowed to count towards those minimum monitoring requirements.

* * * * *

Appendix S: SO₂ Data Requirements Rule

Section I. 40 CFR Part 51, Subpart BB

Subpart BB—Data Requirements for Characterizing Air Quality for the Primary SO₂ NAAQS

Source: 80 FR 51087, Aug. 21, 2015, unless otherwise noted.

§51.1200 Definitions.

The following definitions apply for the purposes of this subpart. All terms not defined herein will have the meaning given them in §51.100 or in the Clean Air Act (CAA). Air agency means the agency or organization responsible for air quality management within a state, local governmental jurisdiction, territory or area subject to tribal government. Annual SO₂ emissions data means the quality-assured annual SO₂ emissions data for a stationary source. Such data may have been required to be reported to the EPA in accordance with an existing regulatory requirement (such as the Air Emissions Reporting Rule or the Acid Rain Program); however, annual SO₂ emissions data may be obtained or determined through other reliable means as well.

Applicable source means a stationary source that is:

- (1) Not located in a designated nonattainment area, and
- (2) Has actual annual SO₂ emissions data of 2,000 tons or more, or has been identified by an air agency or by the EPA Regional Administrator as requiring further air quality characterization. 2010 SO₂ NAAQS means the primary National Ambient Air Quality Standard for sulfur oxides (sulfur dioxide) as codified at 40 CFR 50.17, as effective August 23, 2010.

§51.1201 Purpose.

The purpose of this subpart is to require air agencies to develop and submit air quality data characterizing maximum 1-hour ambient concentrations of SO₂ across the United States through either ambient air quality monitoring or air quality modeling analysis at the air agency's election. These monitoring and modeling data may be used in future determinations by the EPA regarding areas' SO₂ NAAQS attainment status, or for other actions designed to ensure attainment of the 2010 SO₂ NAAQS and provide protection to the public from the short-term health effects associated with exposure to SO₂ concentrations that exceed the NAAQS.

§51.1202 Applicability.

This subpart applies to any air agency in whose jurisdiction is located one or more applicable sources of SO₂ emissions that have annual actual SO₂ emissions of 2,000 tons or more; or in whose jurisdiction is located one or more sources of SO₂ emissions that have been identified by the air agency or by the EPA Regional Administrator as requiring further air quality characterization. For the purposes of this subpart, the subject air agency shall identify applicable sources of SO₂ based on the most recently available annual SO₂ emissions data for such sources.

§51.1203 Air agency requirements.

- (a) The air agency shall submit a list of applicable SO₂ sources identified pursuant to §51.1202 located in its jurisdiction to the EPA by January 15, 2016. This list may be revised by the Regional Administrator after review based on available SO₂ emissions data.
- (b) For each source area subject to requirements for air quality characterization, the air agency shall notify the EPA by July 1, 2016, whether it has chosen to characterize peak 1-hour SO₂ concentrations in such area through

ambient air quality monitoring; characterize peak 1-hour SO₂ concentrations in such area through air quality modeling techniques; or provide federally enforceable emission limitations by January 13, 2017 that limit emissions of applicable sources to less than 2,000 tpy, in accordance with paragraph (e) of this section, or provide documentation that the applicable source has permanently shut down. Emission limits in accordance with paragraph (e) of this section may be established in lieu of conducting monitoring or modeling unless, in the judgment of the air agency or the EPA Regional Administrator, the area warrants further air quality characterization even with the establishment of any new emission limit(s). If the air agency has chosen to establish requirements to limit emissions for applicable sources in an area, the notification from the air agency shall describe the requirements and emission limits the air agency intends to apply. For any area with multiple applicable sources, the air agency (or air agencies if a multi-state area) shall use the same technique (monitoring, modeling, or emissions limitation) for all applicable sources in the area. If multiple air agencies have applicable sources in an area, the air agencies must consult with each other to employ a common technique for the area.

(c) Monitoring. For each area identified in the notification submitted pursuant to paragraph (b) of this section as an area for which SO₂ concentrations will be characterized through ambient monitoring, the required monitors shall be sited and operated either as SLAMS or in a manner equivalent to SLAMS. In either case, monitors shall meet applicable criteria in 40 CFR part 58, appendices A, C, and E and their data shall be subject to data certification and reporting requirements as prescribed in 40 CFR 58.15 and 58.16. These requirements include quarterly reporting of monitoring data to the Air Quality System, and the annual certification of data by May 1 of the following year.

(1) The air agency shall include relevant information about monitors used to meet the requirements of this paragraph (c) in the air agency's Annual Monitoring Network Plan required by 40 CFR 58.10 due July 1, 2016. The air agency shall consult with the appropriate EPA Regional Office in the development of plans to install, supplement, or maintain an appropriate ambient SO₂ monitoring network pursuant to the requirements of 40 CFR part 58 and of this subpart.

(2) All existing, new, or relocated ambient monitors intended to meet the requirements of this paragraph (c) must be operational by January 1, 2017 and must be operated continually until approved for shut down by EPA.

(3) Any SO₂ monitor identified by an air agency in its approved Annual Monitoring Network Plan as having the purpose of meeting the requirements of this paragraph (c) that: Is not located in an area designated as nonattainment as the 2010 SO₂ NAAQS is not also being used to satisfy other ambient SO₂ minimum monitoring requirements listed in 40 CFR part 58, appendix D, section 4.4; and is not otherwise required as part of a SIP, permit, attainment plan or maintenance plan, may be eligible for shut down upon EPA approval if it produces a design value no greater than 50 percent of the 2010 SO₂ NAAQS from data collected in either its first or second 3-year period of operation. The air agency must receive EPA Regional Administrator approval of a request to cease operation of the monitor as part of the EPA's action on the Annual Monitoring Network Plan under 40 CFR 58.10 prior to shutting down any qualifying monitor under this paragraph (c).

(d) Modeling. For each area identified in the notification submitted pursuant to paragraph (b) of this section as an area for which SO₂ concentrations will be characterized through air quality modeling, the air agency shall submit by July 1, 2016, a technical protocol for conducting such modeling to the Regional Administrator for review. The air agency shall consult with the appropriate EPA Regional Office in developing these modeling protocols.

(1) The modeling protocol shall include information about the modeling approach to be followed, including but not limited to the model to be used, modeling domain, receptor grid, emissions dataset, meteorological dataset and how the air agency will account for background SO₂ concentrations.

(2) Modeling analyses shall characterize air quality based on either actual SO₂ emissions from the most recent 3 years, or on any federally enforceable allowable emission limit or limits established by the air agency or the EPA and that are effective and require compliance by January 13, 2017.

(3) Except as provided by §51.1204, the air agency shall conduct the modeling analysis for any applicable source identified by the air agency pursuant to paragraph (a) of this section, and for its associated area and any nearby area, as applicable, and submit the modeling analysis to the EPA Regional Office by January 13, 2017.

(e) Federally enforceable requirement to limit SO₂ emissions to under 2,000 tons per year. For each area identified in the notification submitted pursuant to paragraph (b) of this section as an area for which the air agency will adopt federally enforceable requirements in lieu of characterizing air quality through monitoring or modeling, the air agency shall submit documentation to the EPA by January 13, 2017, showing that such requirements have been adopted, are in effect, and been made federally enforceable by January 13, 2017, through an appropriate legal mechanism, and the provisions either:

(1) Require the applicable sources in the area to emit less than 2,000 tons of SO₂ per year for calendar year 2017 and thereafter; or

(2) Document that the applicable sources in the area have permanently shut down by January 13, 2017.

Appendix T: Sulfur Dioxide Population Weighted Emissions Index

This SO₂ rule requires monitoring in or near Core Based Statistical Areas (CBSA's) based on the population weighted emissions index (PWEI).⁵⁸ The PWEI is calculated using the most recent census data or estimates, and the most recent county level emissions data available in the National Emissions Inventory.

The PWEI is calculated by multiplying the population of the CBSA by the total tons per year of SO₂ emissions from counties that make up the CBSA and dividing that product by one million. The PWEI is expressed in units of million person-tons per year.

The final monitoring regulations require monitors to be placed in Core Based Statistical Areas (CBSA's) based on the PWEI for the area. The final rule requires:

- 3 monitors in CBSAs with index values of 1,000,000 or more;
- 2 monitors in CBSAs with index values less than 1,000,000 but greater than 100,000; and
- 1 monitor in CBSAs with index values greater than 5,000 but less than 100,000.

Iowa has chosen the 2020 National Emissions Inventory (NEI) data⁵⁹ as the most complete and accessible data to use for SO₂ emissions information available for Iowa and neighboring States. U.S. Census Bureau population estimates from [Appendix F](#) have been used for population data.

The PWEI for Iowa MSAs are listed in the table below. There are two categories of CBSA's.⁶⁰ A CBSA with an urbanized core of 50,000 or more is referred to as a Metropolitan Statistical Area. Table T.1 provides the PWEI for Iowa Metropolitan Statistical CBSAs. One SO₂ monitor is required for the Omaha-Council Bluffs, NE-IA CBSA. Refer to the [Sulfur Dioxide Monitoring Network Analysis](#) for the fulfillment of this requirement. Those with an urbanized core of 10,000 but fewer than 50,000 in population are designated as Micropolitan Statistical Areas. The PWEI for all Iowa Micropolitan Statistical Areas are well under 5,000 and therefore no Micropolitan Statistical Area requires an SO₂ monitor.

⁵⁸ [40 CFR, Part 58, Appendix D, section 4.4](#)

⁵⁹ [EPA National Emissions Inventory](#)

⁶⁰ <https://www.inc.com/encyclopedia/metropolitan-statistical-area-msa.html>

US Census Geographic Area	US Census Population Estimate, 2022	SO ₂ Emissions, tons per year	SO ₂ Population Weighted Emissions Index	SO ₂ Monitors Required
Omaha-Council Bluffs, NE-IA	976,671	16,095	15,720	1
Sioux City, IA-NE-SD	149,240	3,112	464	0
Cedar Rapids, IA	275,592	2,794	770	0
Davenport-Moline-Rock Island, IA-IL	379,374	1,054	400	0
Des Moines-West Des Moines, IA	729,053	350	255	0
Waterloo-Cedar Falls, IA	167,889	77	13	0
Ames, IA	126,282	317	40	0
Iowa City, IA	178,991	235	42	0
Dubuque, IA	98,677	30	3	0

Table T.1 PWEI for Metropolitan Statistical CBSAs.

Appendix U: Federal Requirements for Lead Sites

40 CFR Part 58 Appendix D —Network Design Criteria for Ambient Air Quality Monitoring

4.5 Lead (Pb) Design Criteria.

(a) State and, where appropriate, local agencies are required to conduct ambient air Pb monitoring near Pb sources which are expected to or have been shown to contribute to a maximum Pb concentration in ambient air in excess of the NAAQS, taking into account the logistics and potential for population exposure. At a minimum, there must be one source-oriented SLAMS site located to measure the maximum Pb concentration in ambient air resulting from each non-airport Pb source which emits 0.50 or more tons per year and from each airport which emits 1.0 or more tons per year based on either the most recent National Emission Inventory (<http://www.epa.gov/ttn/chief/eiinformation.html>) or other scientifically justifiable methods and data (such as improved emissions factors or site-specific data) taking into account logistics and the potential for population exposure.

(i) One monitor may be used to meet the requirement in paragraph 4.5(a) for all sources involved when the location of the maximum Pb concentration due to one Pb source is expected to also be impacted by Pb emissions from a nearby source (or multiple sources). This monitor must be sited, taking into account logistics and the potential for population exposure, where the Pb concentration from all sources combined is expected to be at its maximum.

(ii) The Regional Administrator may waive the requirement in paragraph 4.5(a) for monitoring near Pb sources if the State or, where appropriate, local agency can demonstrate the Pb source will not contribute to a maximum Pb concentration in ambient air in excess of 50 percent of the NAAQS (based on historical monitoring data, modeling, or other means). The waiver must be renewed once every 5 years as part of the network assessment required under §58.10(d).

(iii) State and, where appropriate, local agencies are required to conduct ambient air Pb monitoring near each of the airports listed in Table D-3A for a period of 12 consecutive months commencing no later than December 27, 2011. Monitors shall be sited to measure the maximum Pb concentration in ambient air, taking into account logistics and the potential for population exposure, and shall use an approved Pb-TSP Federal Reference Method or Federal Equivalent Method. Any monitor that exceeds 50 percent of the Pb NAAQS on a rolling 3-month average (as determined according to 40 CFR part 50, Appendix R) shall become a required monitor under paragraph 4.5(c) of this Appendix, and shall continue to monitor for Pb unless a waiver is granted allowing it to stop operating as allowed by the provisions in paragraph 4.5(a)(ii) of this appendix. Data collected shall be submitted to the Air Quality System database according to the requirements of 40 CFR part 58.16.

Table D-3A Airports to be Monitored for Lead

Airport	County	State
Merrill Field	Anchorage	AK
Pryor Field Regional	Limestone	AL
Palo Alto Airport of Santa Clara County	Santa Clara	CA
McClellan-Palomar	San Diego	CA
Reid-Hillview	Santa Clara	CA

Airport	County	State
Gillespie Field	San Diego	CA
San Carlos	San Mateo	CA
Nantucket Memorial	Nantucket	MA
Oakland County International	Oakland	MI
Republic	Suffolk	NY
Brookhaven	Suffolk	NY
Stinson Municipal	Bexar	TX
Northwest Regional	Denton	TX
Harvey Field	Snohomish	WA
Auburn Municipal	King	WA

(b) [Reserved]

(c) The EPA Regional Administrator may require additional monitoring beyond the minimum monitoring requirements contained in paragraph 4.5(a) of this appendix where the likelihood of Pb air quality violations is significant or where the emissions density, topography, or population locations are complex and varied. The EPA Regional Administrators may require additional monitoring at locations including, but not limited to, those near existing additional industrial sources of Pb, recently closed industrial sources of Pb, airports where piston-engine aircraft emit Pb, and other sources of re-entrained Pb dust.

Appendix V: Lead (Pb) Emissions Inventory Memo



IOWA DEPARTMENT OF NATURAL RESOURCES

GOVERNOR KIM REYNOLDS
LT. GOVERNOR ADAM GREGG
DIRECTOR KAYLA LYON

Air Quality Bureau

Memo

To: John Gering
From: Nick Page
CC: Pete Zayudis, Brad Ashton, Marnie Stein, Brian Hutchins, Jim McGraw
Date: 4/26/2023
Re: Lead Emissions Inventory Narrative for 2023 Ambient Monitoring Network Plan

Purpose of this Document

To identify facilities that reported actual lead emissions of greater than or equal to 0.25 tons of lead (Pb) per year for calendar year 2021. The actual lead emissions estimates, as estimated by DNR, are estimated using the most recent and best available set of facility-specific data that includes, but is not limited to, actual throughput, valid stack test data, dust analyses, engineering estimates, operating schedules, and control efficiencies.

Introduction

The Environmental Protection Agency (EPA) finalized a revised standard for Pb on November 12, 2008. The standard was revised from 1.5 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$) of air, to 0.15 $\mu\text{g}/\text{m}^3$. In conjunction with strengthening the lead NAAQS, EPA identified the need for states to improve existing lead monitoring networks by requiring monitors to be placed in areas with sources that have actual Pb emissions of 1.0 ton or more per year (tpy) and in urban areas with more than 500,000 people. States will base their specific siting decisions regarding Pb monitoring on dispersion modeling results and reviews of the existing emission inventories for Pb. On December 14, 2010, EPA signed an amendment to the lead ambient air monitoring requirement to expand the lead monitoring network. This amendment reduces the actual lead emissions threshold for the site specific monitoring requirement to 0.5 tons or more per year.

Table 1: Facilities included in the 2021 NEI submittal with actual emissions estimates of 0.25 tpy or greater.

Facility Name	Facility ID	2021 Actual Emissions (Tons)
MidAmerican Energy Company – Walter Scott	78-01-026	0.248