

# A d d e n d u m

Iowa Department of Transportation  
Office of Contracts

Date of Letting: December 17, 2013  
Date of Addendum: December 16, 2013

<b>B.O.</b>	<b>Proposal ID</b>	<b>Proposal Work Type</b>	<b>County</b>	<b>Project Number</b>	<b>Addendum</b>
008	18-C018-068	BRIDGE REPLACEMENT- OTHER	CHEROKEE	FM-C018(68)--55-18	17DEC008.A03

---

Notice: Only the bid proposal holders receive this addendum and responsibility for notifying any potential subcontractors or suppliers remains with the proposal holder.

---

Make the following changes to Plans:


Replace Plan Sheet B.02 with the attached Plan Sheet B.02

BILL OF MATERIALS	
1)	14 EA HP10" X 42# X 70' BEARING PILE
	12 EA HP8" X 36# X 30' WING PILE
2)	86 EA 7GA. X 40' SHEET PILE
	2 EA 7GA. X 35' SHEET PILE CORNER 120 DEG.
	2 EA 7GA. X 35' SHEET PILE CORNER 90 DEG.
3)	4 EA C15" X 33.9# X 35'-0" ABUT. CAP
	2 EA C15" X 33.9# X 35'-0" ABUT. BACKWALL
	8 EA W6" X 15# X 17' WING BEAMS
4)	2 EA PL1/2" X 12" X 35'-0" BEARING CAP PLATE
	2 EA 1/2" X 6" X 35'-0" BEARING PAD
5)	9 EA 21" X 34" X 41' DECK SLAB (INTERIOR)
	2 EA 21" X 34" X 41' DECK SLAB (EXTERIOR)
6)	22 EA 1" X 18" BOLT, NUT, & WASHER
7)	2 EA PL 1/4" X 8" X 35'-0" SHEET PILE CAP W/75 EA
	7/8" X 5" STUDS FACTORY WELDED @ 12" SPACING IN 2 ROWS
8)	2 EA L3" X 2" X 5/16" X 4'-6" ANGLE IRON
9)	14 EA W6" X 20# X 3'-4" RAIL POST (GALVANIZED)
	14 EA PL1/2" X 7" X 7" BASE PLATE (GALVANIZED)
	14 EA PL1/2" X 3" X 3" BEARING PLATE (GALVANIZED)
	2 EA 12GA. X 43' THRIE BEAM W/BOLTS & NUTS
	14 3/4"DIAx7" A-325 BOLT W/WASHER
10)	12 EA 1" DIA. X 20' TIE RODS WITH PLATES & NUTS
	4 EA 1" DIA. X 9' TIE RODS
11)	_____ GROUT FOR DECK SLAB JOINTS AND HOLE FILL

- | BILL OF MATERIALS |  |
|-------------------|--|
| 1)                | 14 EA HP10" X 42# X 70' BEARING PILE                   |
|                   | 12 EA HP8" X 36# X 30' WING PILE                       |
| 2)                | 86 EA 7GA. X 40' SHEET PILE                            |
|                   | 2 EA 7GA. X 35' SHEET PILE CORNER 120 DEG.             |
|                   | 2 EA 7GA. X 35' SHEET PILE CORNER 90 DEG.              |
| 3)                | 4 EA C15" X 33.9# X 35'-0" ABUT. CAP                   |
|                   | 2 EA C15" X 33.9# X 35'-0" ABUT. BACKWALL              |
|                   | 8 EA W6" X 15# X 17' WING BEAMS                        |
| 4)                | 2 EA PL1/2" X 12" X 35'-0" BEARING CAP PLATE           |
|                   | 2 EA 1/2" X 6" X 35'-0" BEARING PAD                    |
| 5)                | 9 EA 21" X 34" X 41' DECK SLAB (INTERIOR)              |
|                   | 2 EA 21" X 34" X 41' DECK SLAB (EXTERIOR)              |
| 6)                | 22 EA 1" X 18" BOLT, NUT, & WASHER                     |
| 7)                | 2 EA PL 1/4" X 8" X 35'-0" SHEET PILE CAP W/75 EA      |
|                   | 7/8" X 5" STUDS FACTORY WELDED @ 12" SPACING IN 2 ROWS |
| 8)                | 2 EA L3" X 2" X 5/16" X 4'-6" ANGLE IRON               |
| 9)                | 14 EA W6" X 20# X 3'-4" RAIL POST (GALVANIZED)         |
|                   | 14 EA PL1/2" X 7" X 7" BASE PLATE (GALVANIZED)         |
|                   | 14 EA PL1/2" X 3" X 3" BEARING PLATE (GALVANIZED)      |
|                   | 2 EA 12GA. X 43' THRIE BEAM W/BOLTS & NUTS             |
|                   | 14 3/4"DIAx7" A-325 BOLT W/WASHER                      |
| 10)               | 12 EA 1" DIA. X 20' TIE RODS WITH PLATES & NUTS        |
|                   | 4 EA 1" DIA. X 9' TIE RODS                             |
| 11)               | GROUT FOR DECK SLAB JOINTS AND HOLE FILL               |

Iowa DOT Standard Specifications
1) H-Pile – 2501 2) Sheet Pile – 2501 3) Structural Steel – 2408 5) Concrete Beams – 2407 9) Steel Beam Guardrails

- | Iowa DOT Standard Specifications  |
|---|
| 1) H-Pile – 2501<br>2) Sheet Pile – 2501<br>3) Structural Steel – 2408<br>5) Concrete Beams – 2407<br>9) Steel Beam Guardsrails |

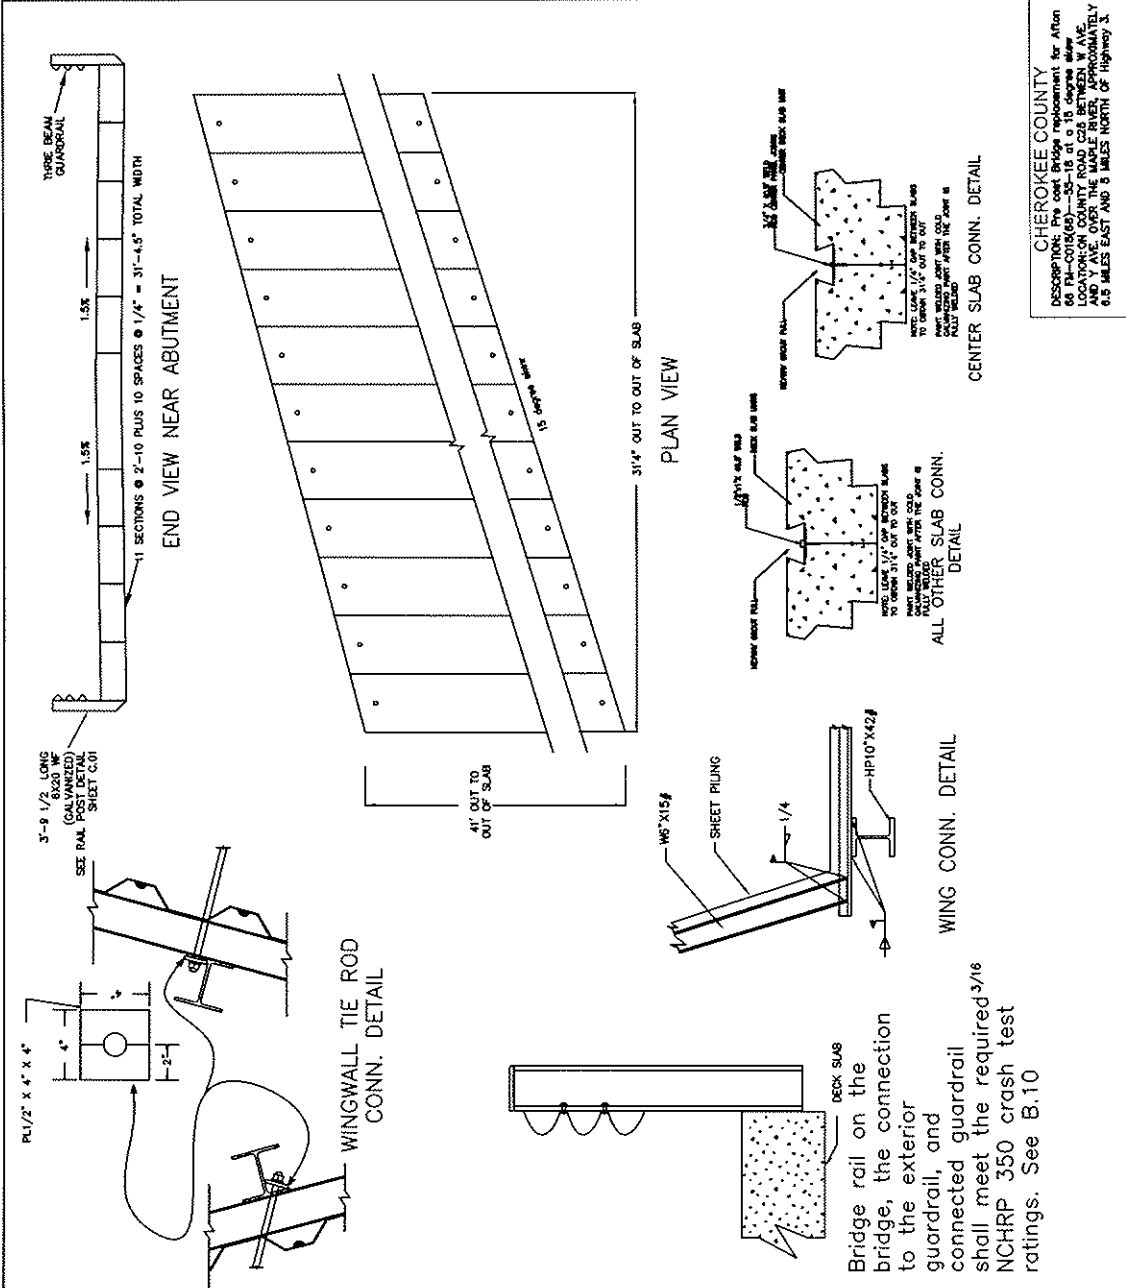

Project Number: FM-CO18(68)--55-18